

# ENGINEERING DRAWING

## (NSQF)

1<sup>st</sup> YEAR  
(For 2 Year Trades)

(As per Revised Syllabus July 2022)

### Group 22

#### Group 22 CTS Trades Covered

Spinning Technician, Textile wet processing Technician,  
Weaving Technician



Directorate General of Training

DIRECTORATE GENERAL OF TRAINING  
MINISTRY OF SKILL DEVELOPMENT & ENTREPRENEURSHIP  
GOVERNMENT OF INDIA



**NATIONAL INSTRUCTIONAL  
MEDIA INSTITUTE, CHENNAI**

Post Box No. 3142, CTI Campus, Guindy, Chennai - 600 032

## Engineering Drawing (NSQF) 1<sup>st</sup> Year (For 2 Year Trades)

### Group 22 Engineering Trades

As per Revised syllabus July 2022 under CTS

#### Developed & Published by



#### **National Instructional Media Institute**

Post Box No.3142

Guindy, Chennai - 600032

INDIA

Email: [chennai-nimi@nic.in](mailto:chennai-nimi@nic.in)

Website: [www.nimi.gov.in](http://www.nimi.gov.in)

Copyright © 2022 National Instructional Media Institute, Chennai

First Edition : December 2022

Copies : 1000

**Rs. 100/-**

All rights reserved.

No part of this publication can be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording or any information storage and retrieval system, without permission in writing from the National Instructional Media Institute, Chennai.

## FOREWORD

The Government of India has set an ambitious target of imparting skills one out of every four Indians, to help them secure jobs as part of the National Skills Development Policy. Industrial Training Institutes (ITIs) play a vital role in this process especially in terms of providing skilled manpower. Keeping this in mind, and for providing the current industry relevant skill training to Trainees, ITI syllabus has been recently updated with the help of comprising various stakeholder's viz. Industries, Entrepreneurs, Academicians and representatives from ITIs.

The National Instructional Media Institute (NIMI), Chennai, has now come up with instructional material to suit the revised curriculum for **Engineering Drawing 1<sup>st</sup> Year (For 2 Year Trades) NSQF Group 22 Engineering Trades (Revised 2022)** under CTS will help the trainees to get an international equivalency standard where their skill proficiency and competency will be duly recognized across the globe and this will also increase the scope of recognition of prior learning. NSQF trainees will also get the opportunities to promote life long learning and skill development. I have no doubt that with NSQF the trainers and trainees of ITIs, and all stakeholders will derive maximum benefits from these IMPs and that NIMI's effort will go a long way in improving the quality of Vocational training in the country.

The Director General, Executive Director & Staff of NIMI and members of Media Development Committee deserve appreciation for their contribution in bringing out this publication.

Jai Hind

**ATUL KUMAR TIWARI, I.A.S**

Secretary

Ministry of Skill Development & Entrepreneurship,  
Government of India.

December 2023  
New Delhi - 110 001

## PREFACE

The National Instructional Media Institute(NIMI) was set up at Chennai, by the Directorate General of Training, Ministry of skill Development and Entrepreneurship, Government of India, with the technical assistance from the Govt of the Federal Republic of Germany with the prime objective of developing and disseminating instructional Material for various trades as per prescribed syllabus and Craftsman Training Programme(CTS) under NSQF levels.

The Instructional materials are developed and produced in the form of Instructional Media Packages (IMPs), consisting of Trade Theory, Trade Practical, Test and Assignment Book, Instructor Guide, Wall charts, Transparencies and other supportive materials. The above material will enable to achieve overall improvement in the standard of training in ITIs.

A national multi-skill programme called SKILL INDIA, was launched by the Government of India, through a Gazette Notification from the Ministry of Finance (Dept of Economic Affairs), Govt of India, dated 27th December 2013, with a view to create opportunities, space and scope for the development of talents of Indian Youth, and to develop those sectors under Skill Development.

The emphasis is to skill the Youth in such a manner to enable them to get employment and also improve Entrepreneurship by providing training, support and guidance for all occupation that were of traditional types. The training programme would be in the lines of International level, so that youths of our Country can get employed within the Country or Overseas employment. The **National Skill Qualification Framework (NSQF)**, anchored at the National Skill Development Agency(NSDA), is a Nationally Integrated Education and competency-based framework, to organize all qualifications according to a series of **levels of Knowledge, Skill and Aptitude**. Under NSQF the learner can acquire the Certification for Competency needed at any level through formal, non-formal or informal learning.

The **Engineering Drawing** 1<sup>st</sup> Year (For 2 Year Trades) NSQF Group 22 - Engineering Trades (Revised 2022) under CTS is one of the book developed by the core group members as per the NSQF syllabus.

The **Engineering Drawing** 1<sup>st</sup> Year (For 2 Year Trades) NSQF Group 22 - Engineering Trades under (Revised 2022) CTS as per NSQF is the outcome of the collective efforts of experts from Field Institutes of DGT, Champion ITI's for each of the Sectors, and also Media Development Committee (**MDC**) members and Staff of **NIMI**. NIMI wishes that the above material will fulfill to satisfy the long needs of the trainees and instructors and shall help the trainees for their Employability in Vocational Training.

NIMI would like to take this opportunity to convey sincere thanks to all the Members and Media Development Committee (MDC) members.

Chennai - 600 032

EXECUTIVE DIRECTOR

## ACKNOWLEDGEMENT

The National Instructional Media Institute (NIMI) sincerely acknowledge with thanks the co-operation and contribution of the following Media Developers to bring this IMP for the course **Engineering Drawing 1<sup>st</sup> Year (For 2 Year Trades) Group 22 - Engineering Trades** as per NSQF Revised 2022.

### MEDIA DEVELOPMENT COMMITTEE MEMBERS

Shri. M. Sangara pandian	-	Training Officer (Retd.) CTI, Govt. of India, Guindy, Chennai - 32.
Shri. G. Sathiamoorthy	-	Jr. Training Officer - SG (Retd.) Govt I.T.I, Trichy, DET - Tamilnadu.
Shri. R. Sekaran	-	Junior Training Officer (Retd.) MDC Member, NIMI, Chennai - 32.

### NIMI CO-ORDINATORS

Shri. Nirmalya Nath	-	Deputy General Manager, NIMI, Chennai - 32.
Shri. G. Michael Johny	-	Manager, NIMI, Chennai - 32.

NIMI records its appreciation of the **Data Entry, CAD, DTP Operators** for their excellent and devoted services in the process of development of this IMP.

NIMI also acknowledges with thanks, the efforts rendered by all other staff who have contributed for the development of this book.

# INTRODUCTION

Theory and procedure along with the related exercises for further practice

This book on theory and procedure along with related exercises contains theoretical information on **1 Year Engineering drawing NSQF** (For 2 Year Revised syllabus July 2022 Group 22 - Engineering Trades) and procedure of drawing/ sketching different exercise for further practice are also available. Wherever required, BIS specification has been used.

Exercise for further practice

The practice exercise is given with Theory and procedure for 1<sup>st</sup> Year book made obsolete as it was felt that, it is very difficult to work in workbook using drawing instruments. It is well known fact that, any drawing is prepared on suitable standard size of drawing sheets only.

The instructor is herewith advised to go through the instructions given below and to follow them in view of imparting much drawing skill in the trainees.

Acquiring the above said ability and doing small drawings is not a simple task. These books will provide a good platform for achieving the said skills.

**Time allotment - 1<sup>st</sup> Year : 40 Hrs**

Sl. No.	Topic	Exercise No.	Time Allotment
1	Introduction to Engineering Drawing and Drawing Instruments	1.1.01 - 1.1.05	2
2	Free hand drawing	1.2.06 - 1.2.08	6
3	Drawing of Geometrical Figures	1.3.09 - 1.3.12	4
4	Dimensioning Practice.	1.4.13	2
5	Symbolic Representation	1.5.14	4
6	Reading of chemical plant Circuit Diagram	1.6.15	14
7	Reading of Chemical plant Layout drawing	1.7.16	8
			<hr/> <b>40 Hrs</b>

## Instructions to the Instructors

It is suggested to get the drawing prepared on A4/A3 sheets preferably on only one side. If separate table and chair facility is available for every trainee then it is preferred to use A3 sheets and if the drawing hall is provided with desks then A4 sheets may be used. However while preparing bigger drawings on A4 sheets suitable reduction scale to be used or multiple sheets may be used for detailed and assembly drawings.

First the border and the title block to be drawn only for the first sheet of the chapter. Eg. for conical sections only first sheet will have the title block whereas the rest of the sheets of that chapter will have only borders.

Serial number of sheet and total no. of sheets to be mentioned on each sheet.

The completed sheet to be punched and filled in a box file/ suitable files and preserved by the trainees carefully after the approval of instructor, VP and Principal of the Institute.

The file may be referred by the authority before granting the internal marks at the end of the Year.

## CONTENTS

Exercise No.	Topic of the Exercise	Page No.
	<b>Introduction to engineering drawing and drawing instruments</b>	
1.1.01	Introduction to engineering drawing and drawing instruments	1
1.1.02	Conventions	4
1.1.03	Sizes and layout of drawing sheets	5
1.1.04	Title block, its position and content	7
1.1.05	Drawing instruments	11
	<b>Free hand drawing</b>	
1.2.06	Free hand drawing of - Geometrical figures and blocks with dimension	16
1.2.07	Free hand drawing of - Transferring measurement from the given object to the free hand sketches	19
1.2.08	Free hand drawing of hand tools and measuring tools	23
	<b>Drawing of Geometrical Figures</b>	
1.3.09	Drawing of geometrical figures - Angle & triangle	29
1.3.10	Drawing of geometrical figures - Circle	32
1.3.11	Drawing of geometrical figures - Square, rectangle and parallelogram	34
1.3.12	Lettering and numbering - Single stroke	36
	<b>Dimensioning Practice</b>	
1.4.13	Dimensioning - Types of arrow heads	40
	<b>Symbolic Representation</b>	
1.5.14	Symbolic Representation - Different symbols used in the Spinning / Textile wet processing /weaving Technician trades.	41
	<b>Reading of chemical plant Circuit Diagram</b>	
1.6.15	Reading of chemical plant Circuit Diagram	45
	<b>Reading of Chemical plant Layout drawing</b>	
1.7.16	Reading of Chemical plant Layout drawing	51

### LEARNING /ASSESSABLE OUTCOME

On completion of this book you shall be able to

- **Read and apply engineering drawing for different application in the field of work.**

# SYLLABUS

**1<sup>st</sup> Year**

**Group 22 - Revised syllabus July 2022  
2 Year Engineering trades under CTS**

**Duration: 1 Year**

**CTS Trades Covered:** Spinning Technician, Textile wet processing Technician,  
Weaving Technician

S.no.	Syllabus	Time in Hrs
1	Introduction to Engineering Drawing and Drawing Instruments – <ul style="list-style-type: none"> <li>• Conventions</li> <li>• Sizes and layout of drawing sheets</li> <li>• Title Block, its position and content</li> <li>• Drawing Instruments</li> </ul>	2
2	Free hand drawing of - <ul style="list-style-type: none"> <li>• Geometrical figures and blocks with dimension</li> <li>• Transferring measurement from the given object to the free hand sketches.</li> <li>• Free hand drawing of hand tools and measuring tools.</li> </ul>	6
3	Drawing of Geometrical figures: <ul style="list-style-type: none"> <li>• Angle, Triangle, Circle, Rectangle, Square, Parallelogram.</li> <li>• Lettering &amp; Numbering - Single Stroke.</li> </ul>	4
4	Dimensioning Practice <ul style="list-style-type: none"> <li>• Types of arrowhead</li> </ul>	2
5	Symbolic representation - <ul style="list-style-type: none"> <li>• Different symbols used in the Spinning / Textile wet processing /weaving Technician trades.</li> </ul>	4
6	Reading of chemical plant Circuit Diagram	14
7	Reading of Chemical plant Layout drawing	8
<b>Total</b>		<b>40</b>



Introduction to engineering drawing and drawing instruments

Communication

There are many different ways of communicating ideas, information, instructions, requests, etc. They can be transmitted by signs or gestures, by word of mouth, in writing, or graphically. In an industrial context the graphical method is commonly used with communication is achieved by means of engineering drawings.

If oral and written communication only were used when dealing with technical matters, misunderstandings could arise, particularly in relation to shape and size. The lack of a universal spoken language makes communication and understanding even more difficult because of the necessity to translate both words and meaning from one language to another.

However, the universally accepted methods used in graphical communication through engineering drawings eliminate many of these difficulties and make it possible for drawing prepared by a British designer to be correctly interpreted or "read" by, for example, his German, French or Dutch counterparts.

Equally important, the components shown on the drawings could be made by suitably skilled craftsmen of any nationality provided they can "read" an engineering drawing.


Conventionally prepared engineering drawings provide the main means of communication between the "ideas" men (the designers and draughtsman) and the craftsmen (machinists, fitters, assemblers, etc.). For the communication to be effective, everyone concerned must interpret the drawing in the same way. Only then will the finished product be exactly as the designer envisages it.

To ensure uniformity of interpretation, the British Standards Institution has prepared a booklet entitled BS 308:1972, Engineering Drawing Practice. Now in three parts, this publication recommends the methods which should be adopted for the preparation of drawing used in the engineering industry.

The standards and conventions in most common use and hence those required for a basic understanding of engineering drawing are illustrated and explained in this book.

Language

1 It is the media of communication (Fig 1)

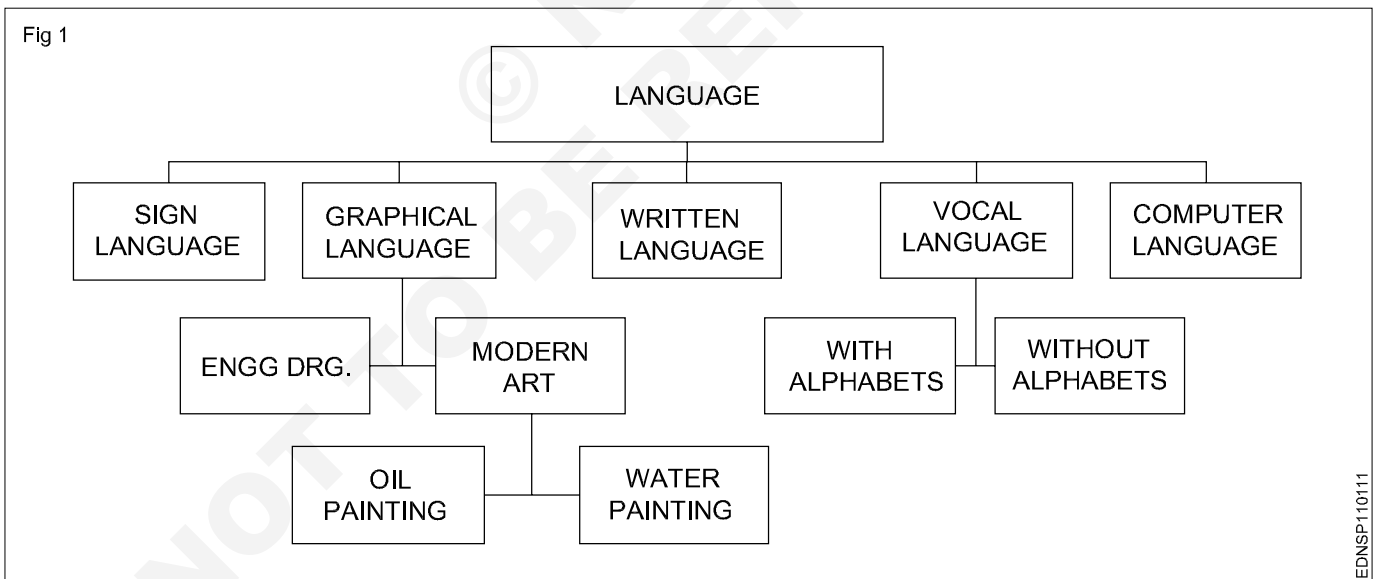

## Conclusion

Effective communication is possible when graphical language is supported by written language/vocal language and vice versa.

Engineering drawing is a language that uses both graphical language and written language for effective communication.

**Engineering drawing is a graphical language that also uses written language for effective communication.**

## The importance of Engineering Drawing

The economic success of any country is mainly dependent on its industrial development. Due to globalization, any industry in our country is expected to be of a global market standard. For the above-mentioned reasons, our Indian products require very high quality for their size, dimension, fit, tolerance, and finish etc.

To produce the best standard product, all the technical personnel (Engineers to Craftsman) in an industry must have a sound knowledge of engineering drawing because engineering drawing is the language of engineers. Engineering drawing is a universal language. Different types of lines make up their alphabets. Technical personnel in any industry, including craftsman, are expected to communicate anything concerning a part or a component by means of drawings involving lines, symbols, conventions, abbreviations etc.

With our spoken languages, it is impossible to express the details of a job or a product. Engineering drawing knowledge and practise are a must for designing or producing a component or part. Even a small mistake in the drawing may reflect very badly on the product. Therefore, reading and doing engineering drawings are very essential for craftsmen and engineers.

A drawing is a graphical representation of an object, or part of it, and is the result of creative thought by an engineer or technician. When one person sketches a rough map in giving direction to another, this is graphic communication. Graphic communication involves using visual materials to relate ideas. Drawings, photographs, slides, transparencies, and sketches are all forms of graphic communication. Any medium that uses a graphic image to aid in conveying a message, instructions, or an idea is involved in graphic communication.

One of the most widely used forms of graphic communication is the drawing. Technically, it can be defined as **"a graphic representation of an idea, a concept or an entity which actually or potentially exists in life"**

Drawing is one of the oldest forms of communicating, dating back even farther than verbal communication. The drawing itself is a method of communicating necessary information about an abstract, such as an idea or concept or a graphic representation of some real entity, such as a machine part, house or tools. There are two basic types of drawings: Artistic and Technical drawings.

## Technical drawings

Technical drawings allows efficient communication among engineers and can be kept as a record of the planning process. Since a picture is worth a thousand words, a technical drawing is a much more effective tool for engineers than a written plan.

The technical drawing, on the other hand is not subtle, or abstract. It does not require an understanding of its creator, only on understanding of technical drawings. A technical drawing is a means of clearly and concisely communicating all of the information necessary to transform an idea or a concept in to reality. Therefore, a technical drawing often contains more than just a graphic representation of its subject. It also contains dimensions, notes and specifications.

## Fields of use

Technical drawing is the preferred method of drafting in all engineering fields, including, but not limited to, civil engineering, electrical engineering, mechanical engineering and architecture.

## Purpose of studying engineering drawing

- 1 To develop the ability to produce simple engineering drawing and sketches based on current practice
- 2 To develop the skills to read manufacturing and construction drawings used in industry.
- 3 To develop a working knowledge of the layout of plant and equipment.
- 4 To develop skills in abstracting information from calculation sheets and schematic diagrams to produce working drawings for manufacturers, installers and fabricators.

## Main types of Engineering drawing

Regardless of branch of engineering the engineering drawing is used. However based on the major engineering branches, engineering drawing can be classified as follows: (Fig 2)

### Mechanical Engineering drawings

Some examples of mechanical engineering drawings are part and assembly drawings, riveted joints, welded joints, fabrication drawings, pneumatics and hydraulics drawings, pipeline diagrams, keys coupling drawings etc. (Fig 3&4)


### Electrical engineering drawing

Wiring diagrams of home and industries, circuit diagrams, electrical installation drawings etc.

### Example

The voltage supply to a filament lamp is 10.8V. The voltage should be 12V. (Fig 5)


Fig 2

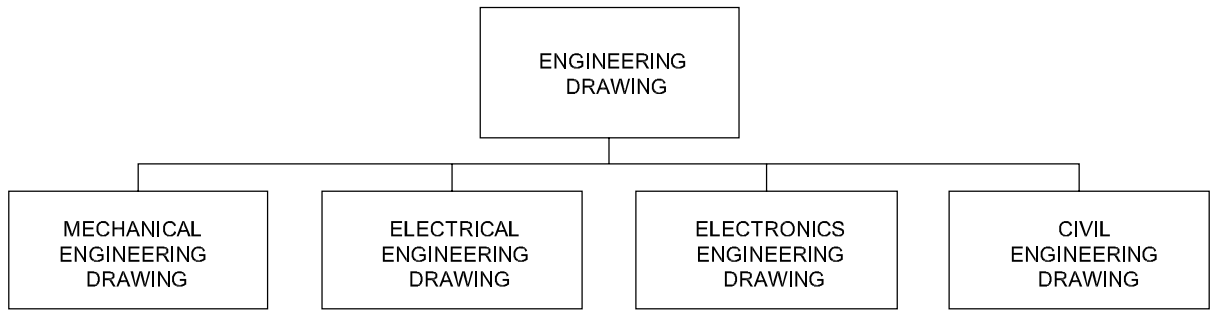

EDNSP110112


**Mechanical Engineering Drawings (Fig 3&4)**

Fig 3

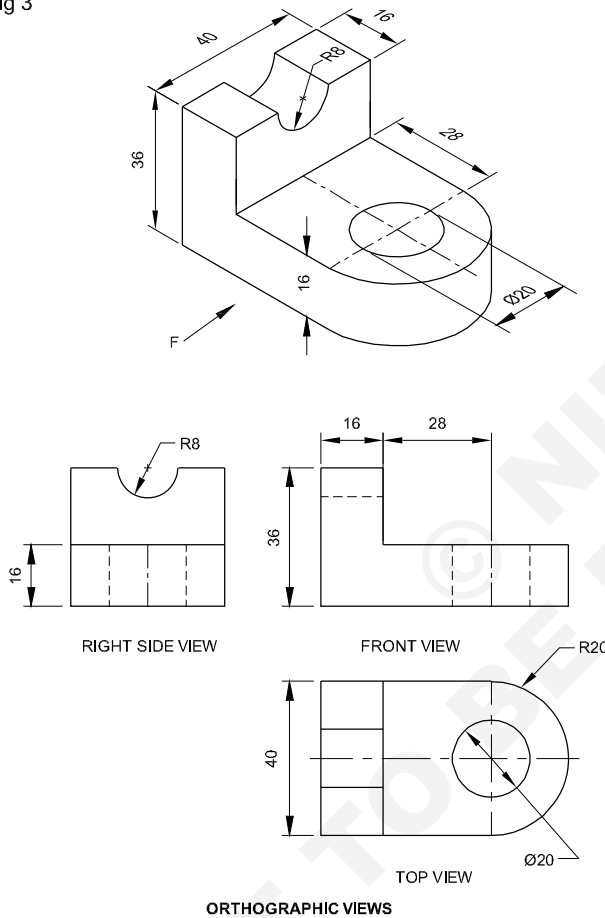

EDNSP110113


Fig 4

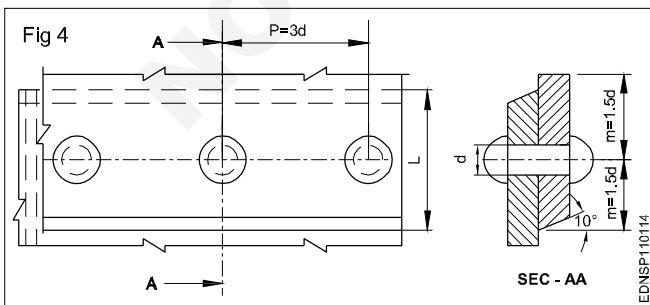

EDNSP110114

**Electrical Engineering Drawing (Fig 5)**

Fig 5

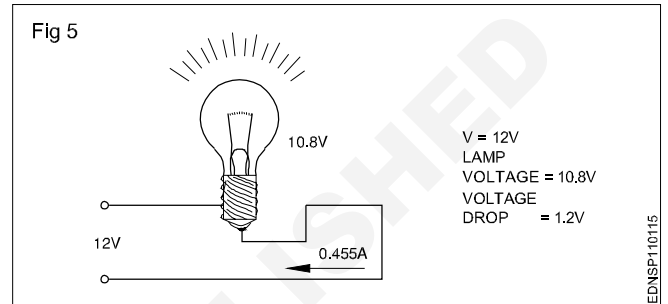


EDNSP110115

**Electronics Engineering Drawing**

**Audio amplifier (Fig 6)**


Fig 6

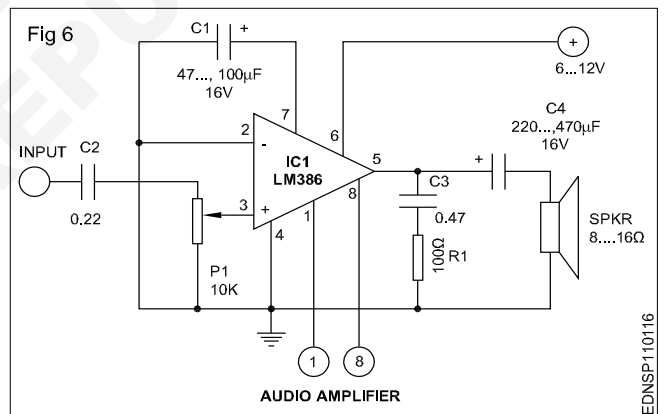

EDNSP110116









**Civil Engineering Drawing (Fig 7)**

Fig 7

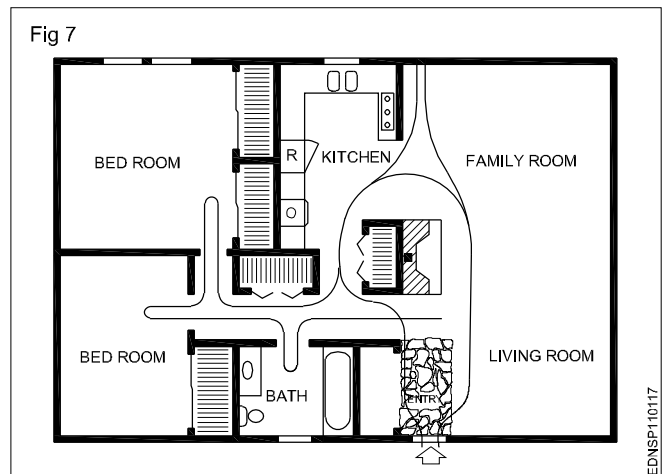

EDNSP110117

**Conventions**

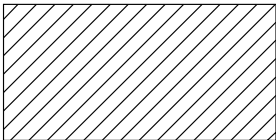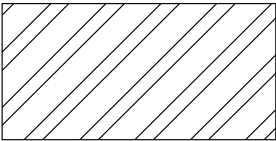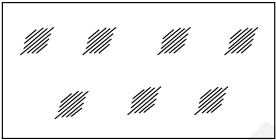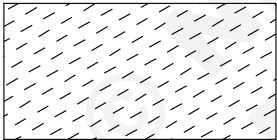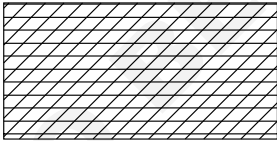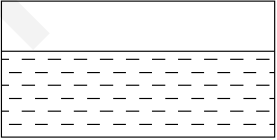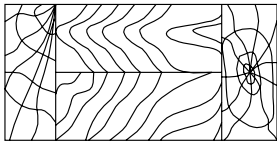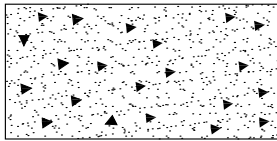TYPE	CONVENTION	MATERIALS
Metals		Steel, Cast Iron, Copper and its Alloys, Aluminium and its alloy, etc
		Lead, Zinc, Tin, White-metal, etc.
Glass		Glass
Packing and Insulating materials		Porcelain, Stoneware, Marble, Slate etc
		Asbestos, Fibre, Felt, Synthetic resin products, Paper, Cork, Linoleum, Rubber, Leather, Wax, insulating & Filling Materials etc
Liquid		Water, Oil, Petrol, Kerosene etc
Wood		Wood, Plywood etc
Concrete		Concrete

**Sizes and layout of drawing sheets**

**Size of drawing sheets (in mm):** While being worked on or handled, the drawing sheets are prone to tear along the edges. So slightly larger(untrimmed) sheets are preferred. They are trimmed afterwards. IS:10811:1983 lays down such as designation of preferred trimmed and untrimmed sizes.

**Designation of sheets:** The drawing sheets are designated by symbols such as A0, A1, A2, A3, A4 and A5. A0 being the largest and A5 is smallest. Table 1 below gives the length and breadth of the above sizes of sheets. (Trimmed and untrimmed)

The relationship between two sides is same as that between a side of a square and its diagonal.

TABLE 1

Designation	Trimmed size	Untrimmed size
A0	841 x 1189	880 x 1230
A1	594 x 841	625 x 880
A2	420 x 594	450 x 625
A3	297 x 420	330 x 450
A4	210 x 297	240 x 330
A5	148 x 210	165 x 240

Special elongated series increasing its widths, double, treble etc. are denoted as follows A3 x 3, A3 x 4, A4 x 3, A4 x 4, A4 x 5. Please refer Table 2.

TABLE 2

**Special elongated series**

Designation	Size
A3 x 3	420 x 891
A3 x 4	420 x 1189
A4 x 3	297 x 630
A4 x 4	297 x 841
A4 x 5	297 x 1051



Fig 1 & 2 shows how the sheet sizes are formed by halving/doubling and similarity of format.

White drawing papers that do not turn yellow on exposure to air are used for finished drawings, maps, charts and drawings for photographic reproductions.

For pencil layouts and working drawings, cream-coloured papers are best suited.

**Quality drawing paper:** The drawing papers should have sufficient teeth or grain to take the pencil lines and withstand repeated erasing.


To get uniform lines, backing paper is to be placed on the drawing board before fixing drawing/tracing paper,. Before starting the drawing, the layout should be drawn. (Ref: IS:10711)

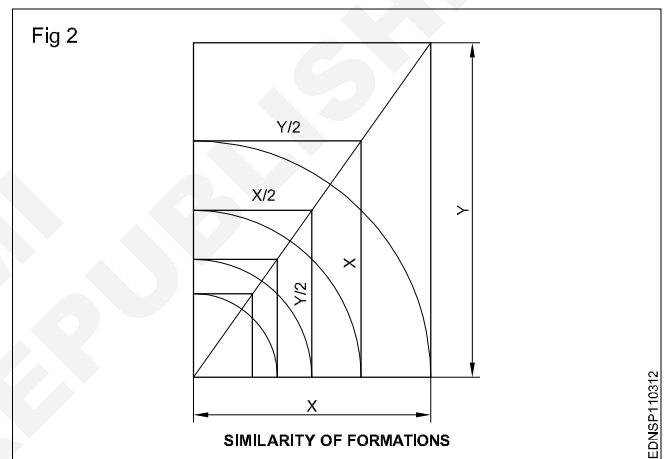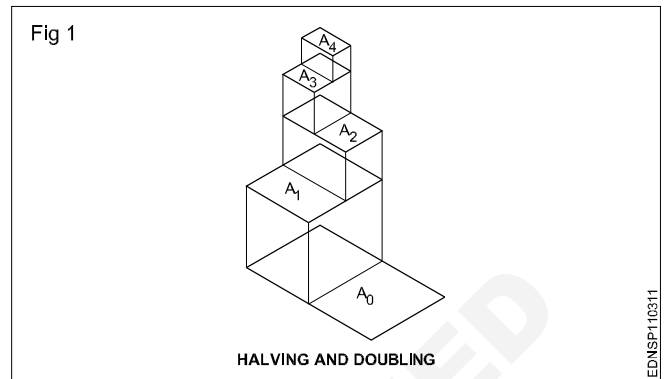

The following is the method of folding printed drawing sheets as recommended by BIS. (Fig 3)

**Method of folding of printed drawing sheets as per BIS SP: 46-2003**

When drawings sheets are in more numbers, they have to be folded and kept in order to save the trace required for preserving them (Fig 4).

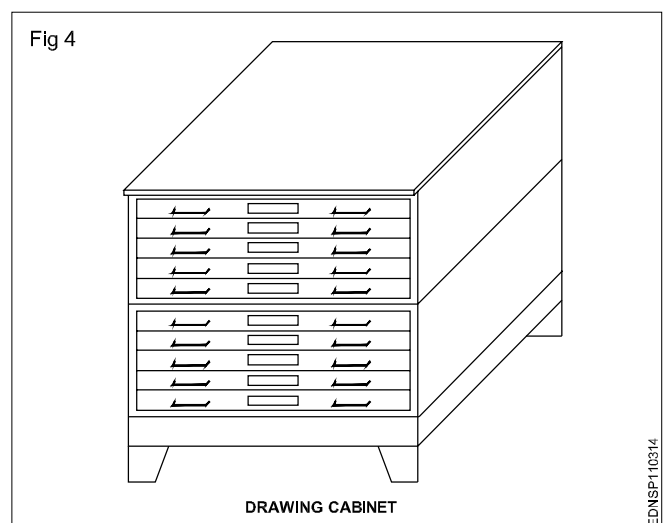


EDNSP110311

EDNSP110312

EDNSP110314


**Method of folding printed drawing sheets (Fig 3)**

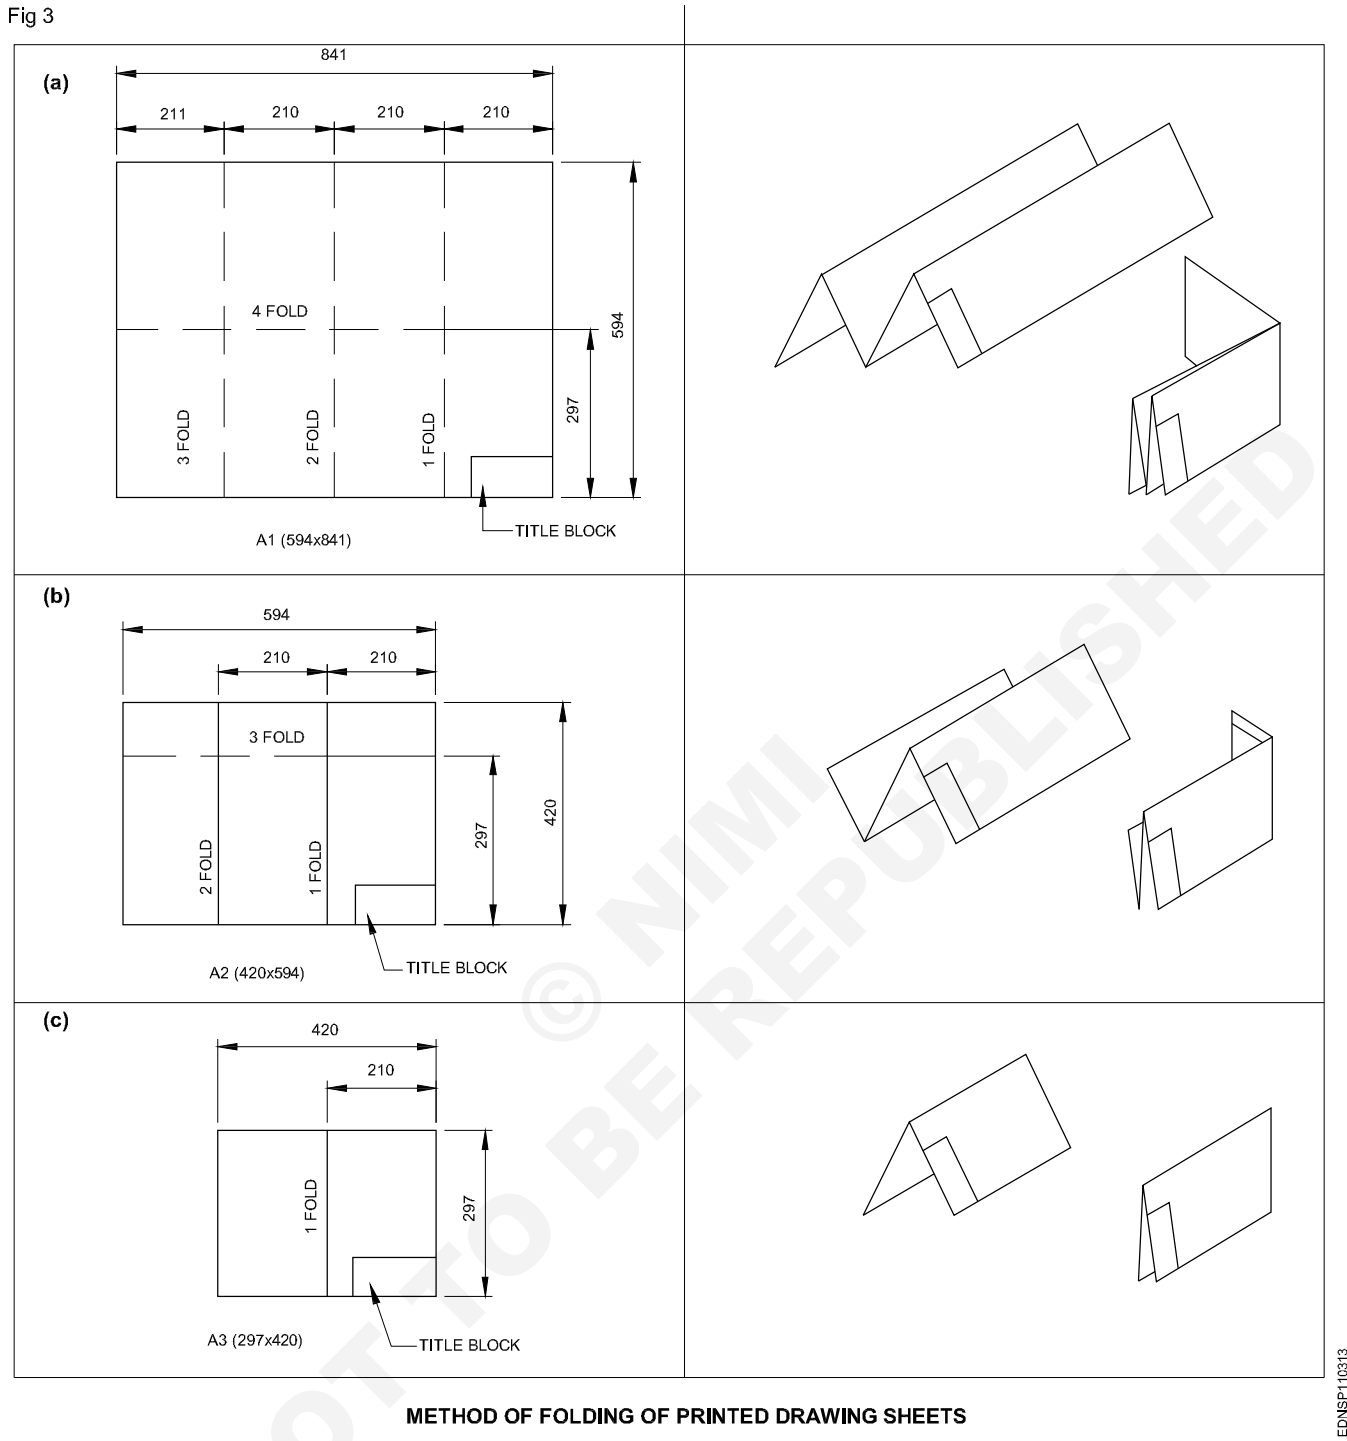


**Title block, its position and content**

**Layout of drawing sheet**


As a standard practice, sufficient margins are to be provided on all sides of the drawing sheet. The drawing sheet should have drawing space and title space. A typical layout of a drawing sheet is shown in the (Fig 1 & 2).

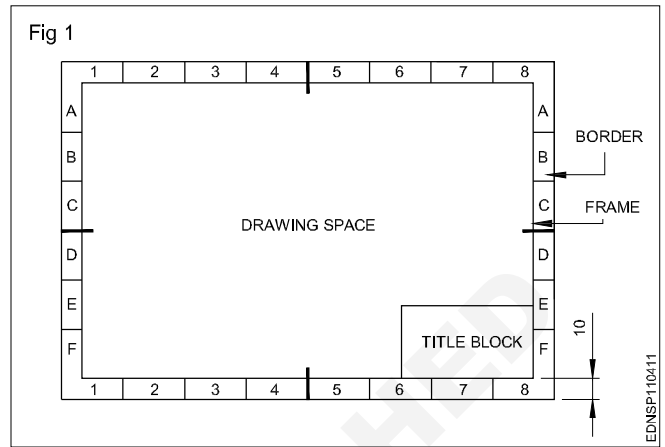


**Title Block - 1**

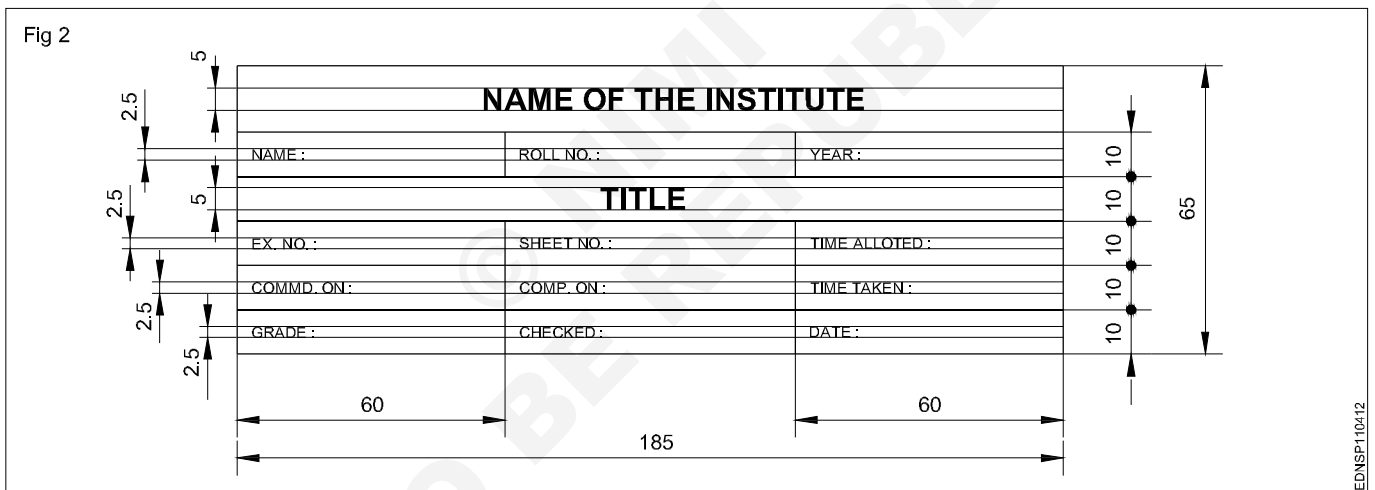

Title Block - 2

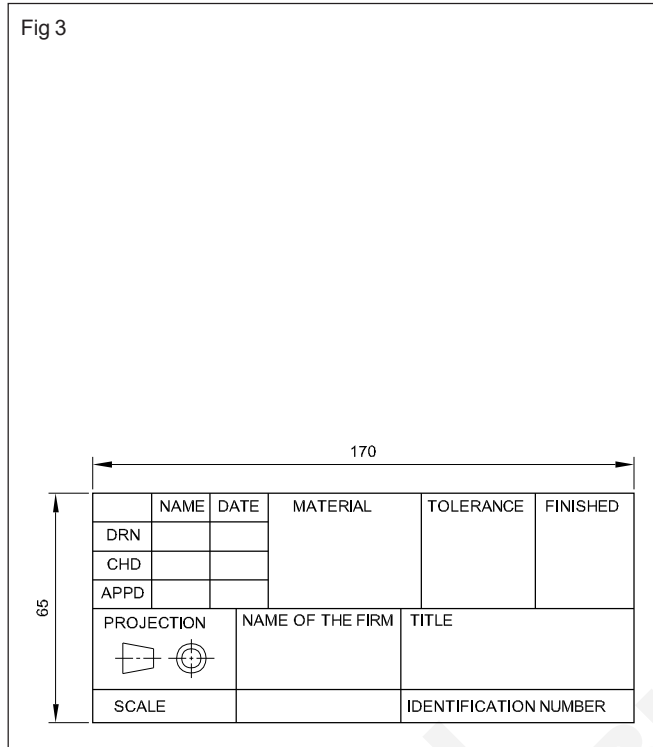


Title Block - 3

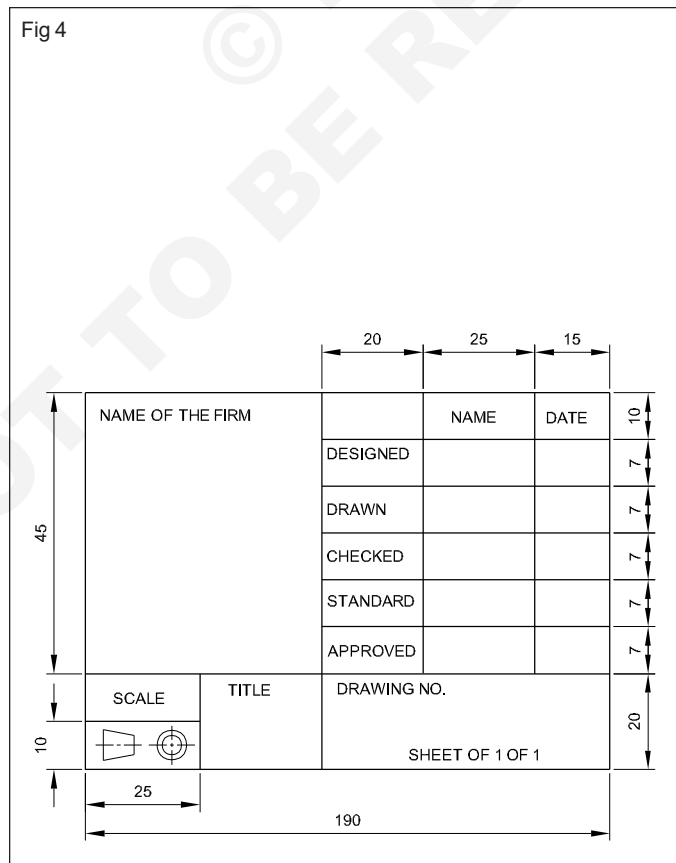



**Title Block - Position and content - 1**

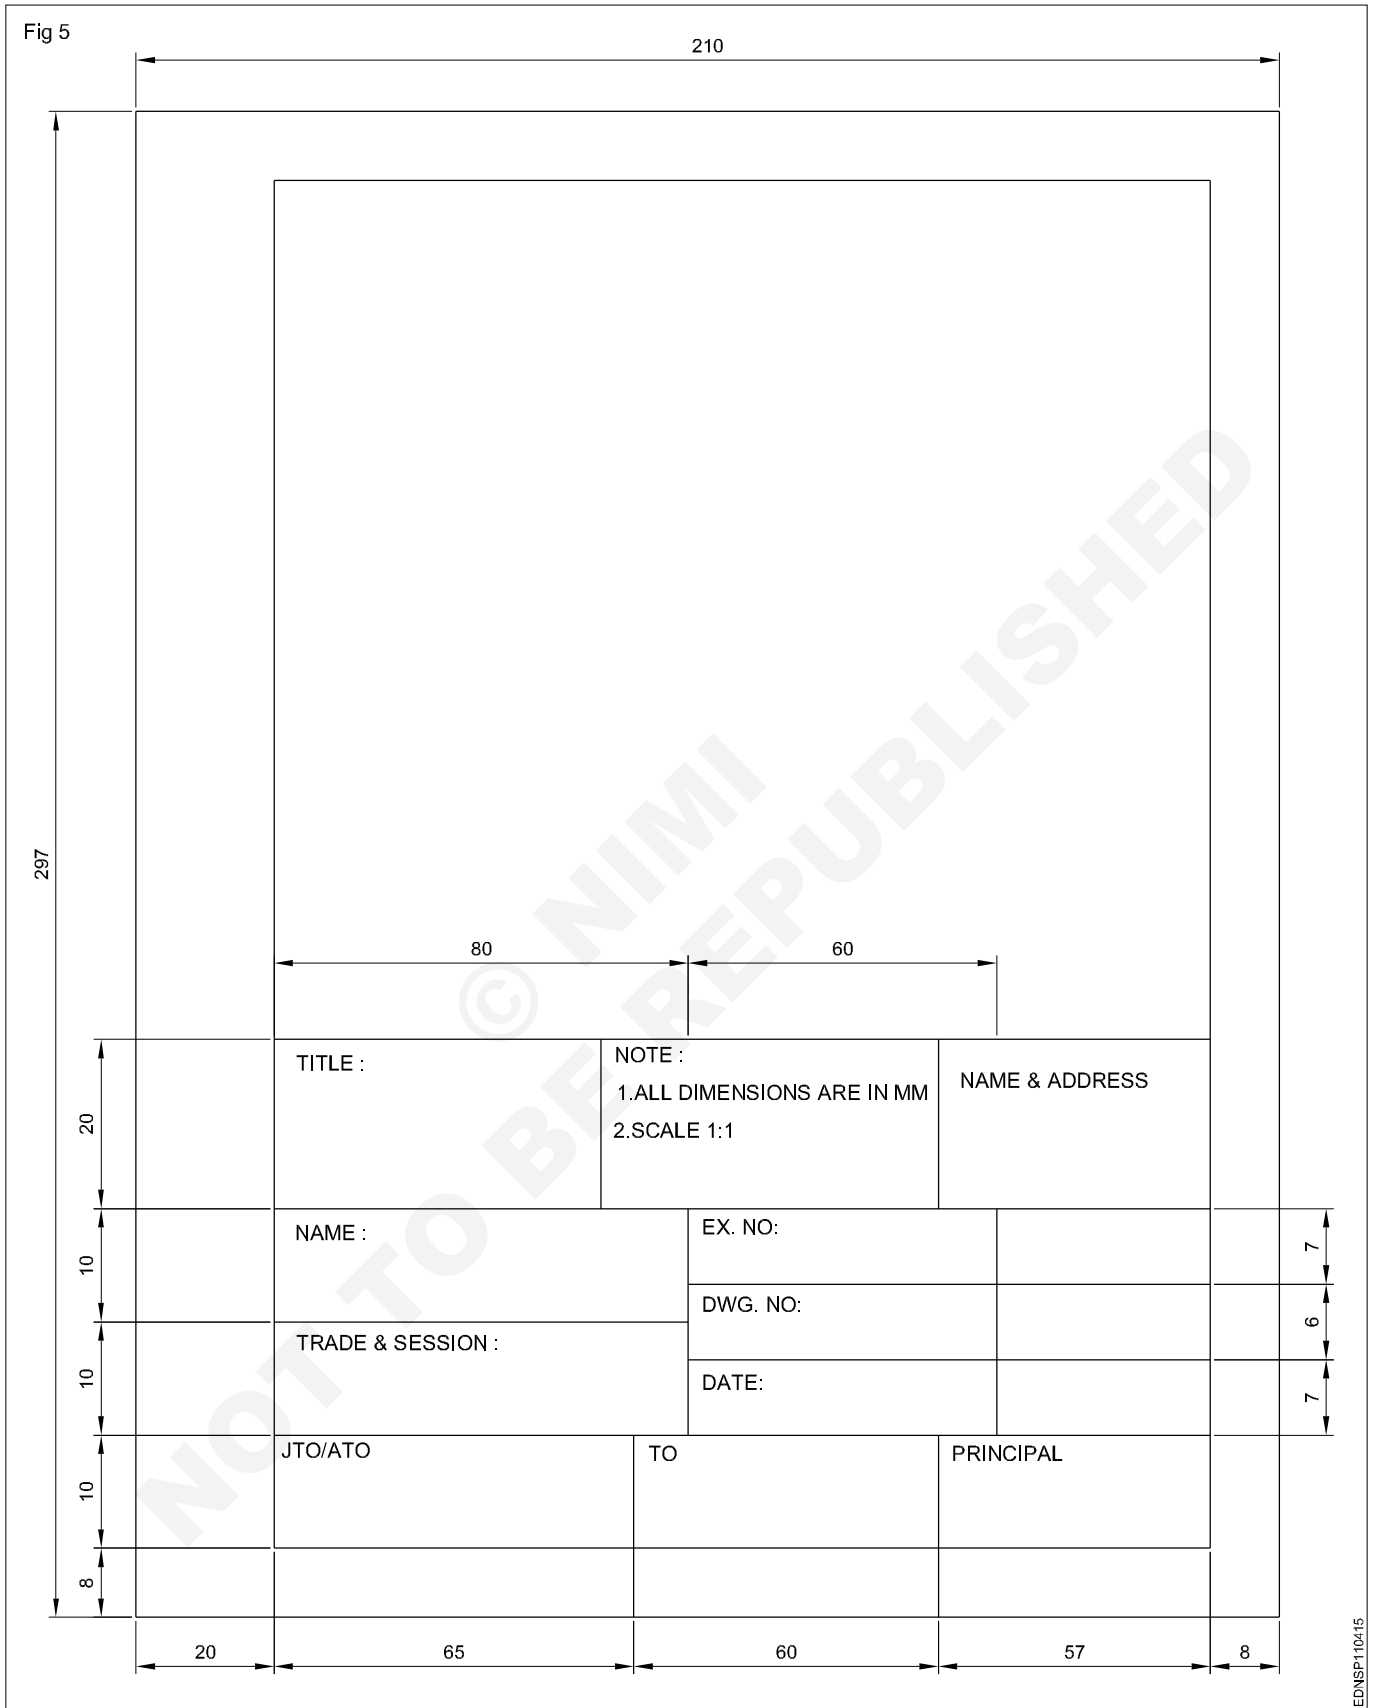


## Title Block - Position and content - 2

Fig 6

DO NOT SCALE

REVISION			
SL.N	DESCRIPTION	DATE	APPX
A	M12 WAS $\frac{1}{2}$ WHIT.	14.12.18	A.W.D

4			
3			
2			
1	A7325	VALVE BODY	1
TEI	DRG OR PART NO.	DESCRIPTION	QTY.

UNLES OTHERWISE STATED ALL DIMENSIONS IN MILLIMETRES. TOLERANCES LINEAR: ANGULAR:		DRN 1:1:78 JKL CKD 2:1:78 MLN APPD 5:1:78 AWB ISSUED 4:2:78 PFP	(NAME OD THE FIRM)	
	MATERIAL : CAST STEEL	(TITLE OF DRW.)		
DRAFTING STANDARD AS 1100	FINISH AS MACHINED	SIZE A3	DRG NO A24641	SHEET 1 OF 1

SCALE 1:2

EDNSP110x16

### Item Reference on Drawing Sheet

05	TIGHTENING PIN	01	MILD STEEL	
04	WORK PIECE	01	ANY MATL.	
03	SCREW ROD	01	STD.	
02	"U" CLAMP	01	CAST IRON	
01	"V" BLOCK	01	CAST IRON	
PART NO	DESCRIPTION OF ITEM	QTY/ASSY	MATERIAL	REMARKS
<b>BILL OF MATERIALS</b>				


The drawing sheet on which the drawings to be prepared should be prepared first by following the procedure given below:

- 1 Take A4/A3 drawing sheet.
- 2 Mark the borders and draw the title block as mentioned.
- 3 Follow the same procedure for A3 drawing sheet where the title block is to be drawn right side bottom corner and the border dimensions remain same.
- 4 Title block to be drawn whenever the title of the drawing changes. Eg. for the geometrical construction chapter the title block may be drawn in the first sheet only where as on the remaining sheets borders to be drawn before they are used for preparing drawings.

**Drawing instruments**

The following are the commonly used equipment in a drawing office.

**Drawing board** (Fig 1): Drawing board is one of the main item of equipment for Draughtsman. It is used for supporting the drawing paper/tracing paper for making drawings. It is made of well-seasoned wood strips of about 25 mm thick or masonite, free from knots and warping. It should be softer enough to allow insertion and removal of drawing pins. Two battens are fastened to the board by screws, in slotted joints. They prevent warping and at the same time permit expansion and contraction of the strips due to the change of moisture in the atmosphere.

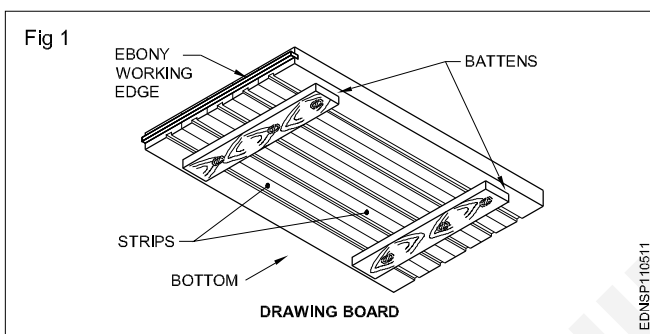

One of the shorter edges of the drawing board is provided with an "ebony edge" (hardwood) fitted perfectly straight.

Standard drawing boards are designated as follows as per IS:1444-1989.

Sl. No.	Designation	Size (mm)
1	D0	1500 x 1000 x 25
2	D1	1000 x 700 x 25
3	D2	700 x 500 x 15
4	D3	500 x 350 x 15

The working edge (ebony) must be straight.

Now-a-days drawing boards are available with laminated surfaces. The flatness can be checked by placing a straight edge on its surface. If no light passes between them, the surface is perfectly flat.

**'T' Square:** It is of 'T' shape, made of well-seasoned wood. It has two parts., head/stock and blade. One of the edges of the blade is the working edge. The blade is screwed to this head such that the working edge is at a right angle to the head. (Fig 2a)


The standard 'T' square is designated as follows with dimensions shown in mm; as per IS:1360-1989.

Sl. No.	Designation	Blade length
1	T0	1500
2	T1	1000
3	T2	700
4	T3	500


The 'T' square is used with its head against the ebony edge of the drawing board to draw horizontal lines, and parallel lines and to guide/hold the set squares, stencils etc.

Fig 2b shows how the 'T' square is used.

'T' square should never be used as a hammer or as a guide for trimming papers.

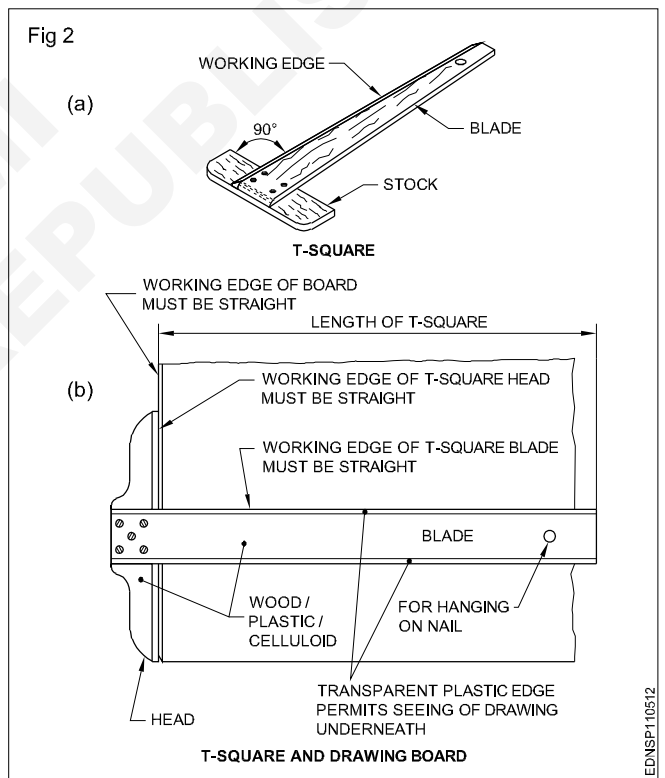

**Drafting in the machine** (Fig 3): It serves the functions of a Tee square, set square, protractor and scale. They come in different sizes and have a pattern called the 'Pantograph' type. It is fitted on the top left side, edge of the drafting board, mounted on an adjustable frame or table. It requires a large area of working place. The angle of the drafting board can be adjusted by the pedal operating system. There are two counterweights to balance the angular position of the board and the drafting head. It is more suitable for the production drawing office.

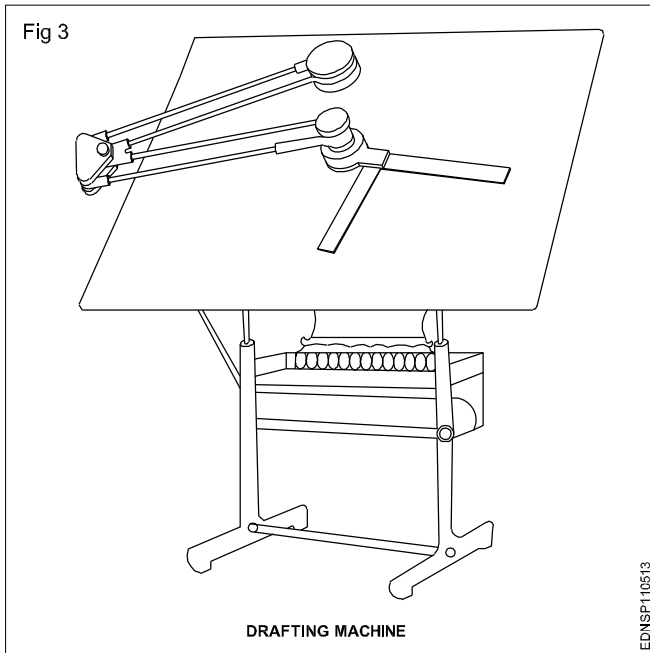




On the other end, a protractor head H with swivelling and locking arrangement is fitted with two scales at right angles.

The protractor head has a spring-loaded clutch relieving handle, which rotates and locks at 15° intervals automatically. For setting any angle other than multiples of 15°, the clutch spring is released and by rotating the centre knob, the zero line is set to the required angle and the friction clutch knob is tightened. It is capable of rotating 180°, thereby any angle can be set.


The scales are bevelled on both sides, graduates to 1:1 & 1:2. They can be reversed with the help of dovetail slide fitting.

There is a fine adjusting mechanism on the drafting head to set the scale parallel to the edge of the board. The scales also can be adjusted if there is an error in measuring 90° between them.


The mini drafter is an important device used for making drawing quickly & accurately. This instrument has the combination of T-square, set square, protractor and scales, it helps to draw the drawings at a faster rate. (Fig 4,5 & 6)

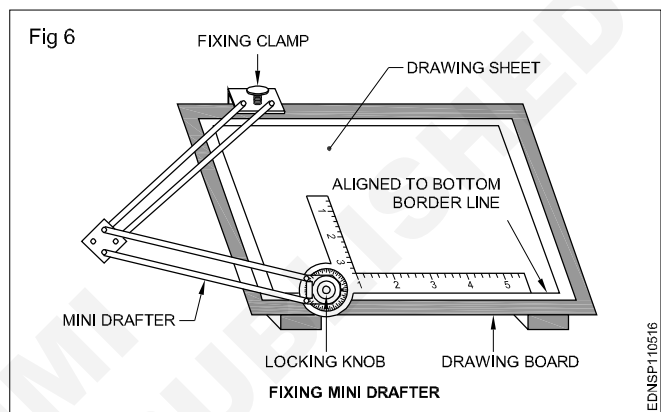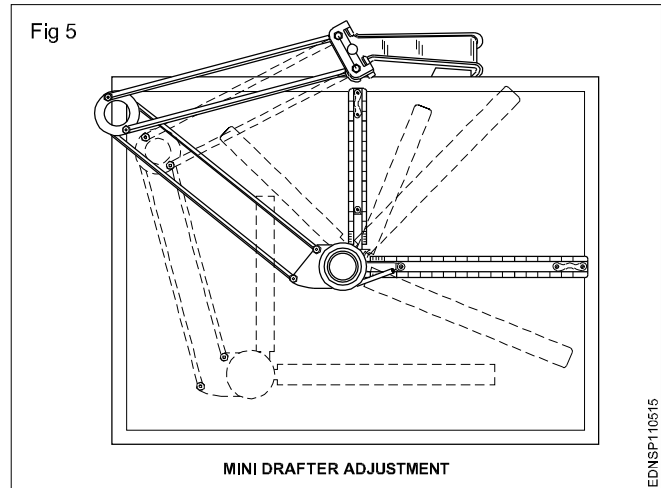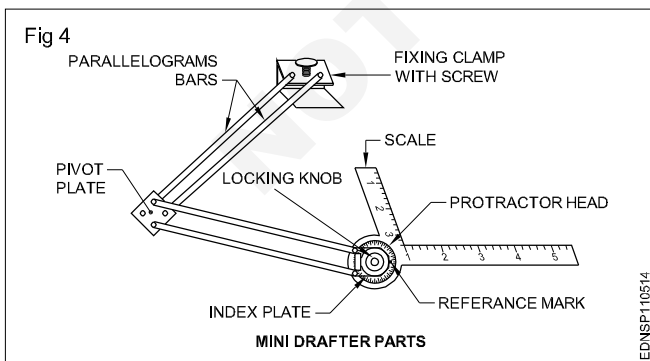


**Erasing shield:** When, on a drawing, if a part of a line or some lines among many other lines needs to be erased or modified, in a normal way erasing will damage the other nearby lines. In such a situation an erasing shield is effectively useful. It is a thin metallic sheet having small openings of different sizes and shapes. A suitable opening is aligned to the line to be erased and the line is removed by the eraser. (Fig 7)

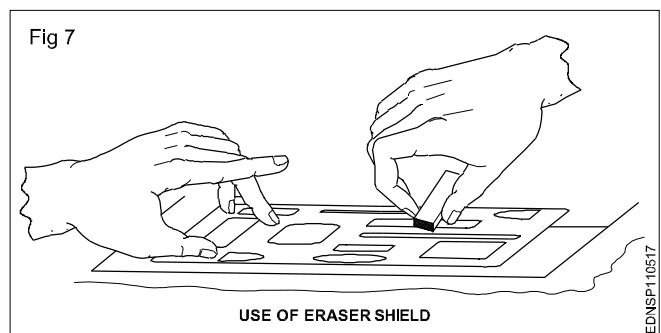

**Set square (IS:1361-1988):** Transparent celluloid /Plastic set squares are preferred and are commonly used rather than ebonite ones. They are two in number, each having one corner with 90°. The set square with 60° & 30° of 250 mm long and 45° of 200mm long is convenient for use. (Fig 8)

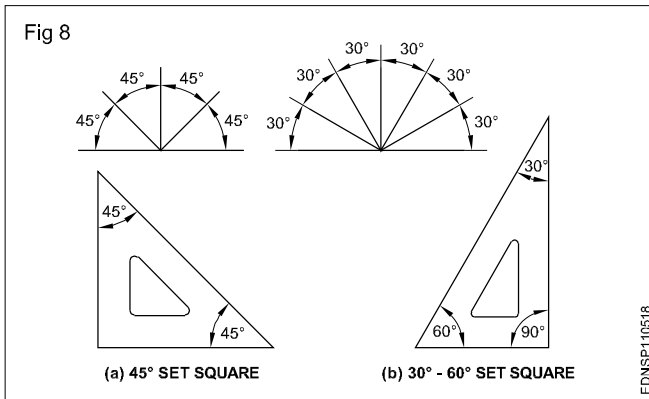


**Scales:** Scales are used to transfer and or measure the dimensions. They are made of wood, steel, ivory, celluloid or plastic, stainless steel scales are more durable. different types of scales used are shown in Fig 9. They are either flat, bevel-edged or triangular cross-sections. Scales of 15cm long, 2cm wide or 30cm long 3.5cm wide are in general use.

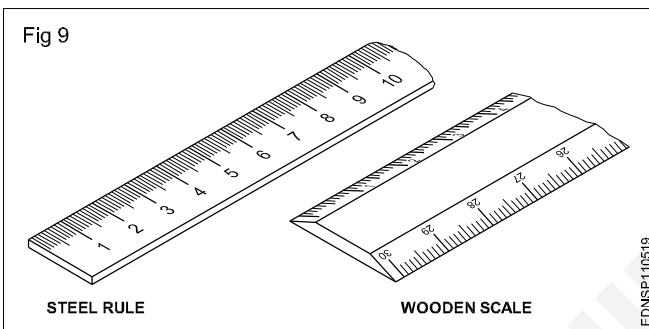

**Protractor:** A protractor is an instrument for measuring angles. It is semi-circular or circular and is made of a flat celluloid sheet.

The angles can be set or measured from both sides, aligning the reference line and point '0' with the corner point of the angle.



Figure 10 shows how to read or set the angle. A protractor can also be used to divide a circle or draw sectors.

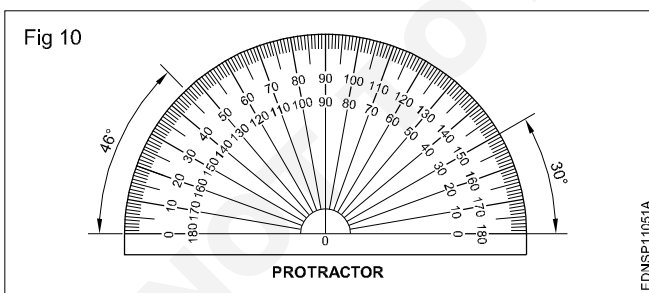

### French curves (Fig 11)

These are made in many different shapes, normally come in sets of 6, 12, 16 etc. French curves are best suited to draw smooth curves/arcs (which cannot be drawn by a compass) with ease. To draw a smooth curve using a french curve first set it by trial against a part of the line to be drawn, then shift it to the next portions.


Fig 12 shows how to use the french curve and draw smooth curves. They are made of transparent celluloid (no bevel edge).

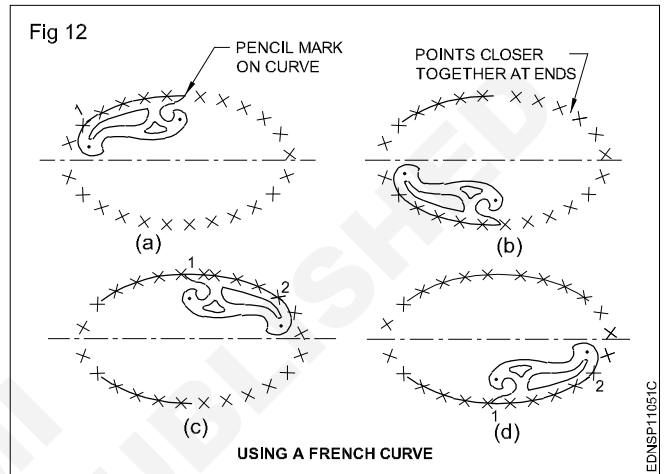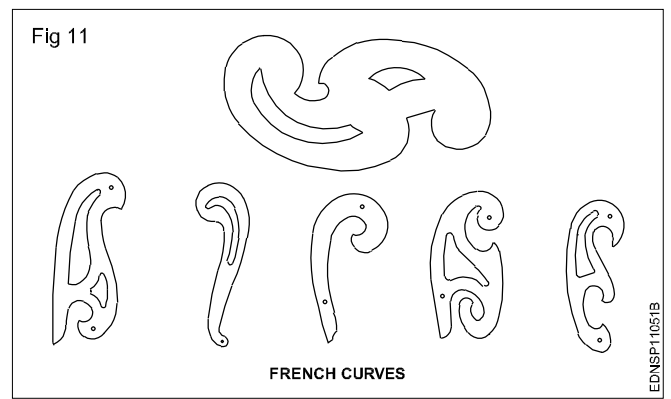

An instrument box contains the following: (Fig 13a to h)

- Large compass (with attachment facility) (a)
- Large divider (b)
- Bow compasses(pencil/ink), bow divider (c)
- Lengthening bar (d)
- Pen point for attachment (e)
- Screwdriver (f)
- Lead case (g)
- Liner (h)


**Large compass** (Fig 14): It has a knee joint in one leg that permits the insertion of a pen or pencil point or attaching a lengthening bar with a pen or pencil point attached to it. It is used for drawing large circles/arcs and also for taking large measurements.

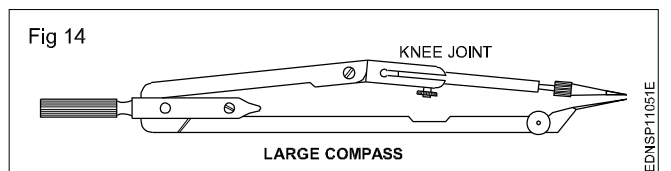

**As a rule, while drawing concentric circles, small circles should be drawn first before the centre hole gets worn.**


**Large divider:** It is used to transfer dimensions and divide lines into several equal parts. Divider with adjustable joints is preferable rather than plain legs. (Fig 15)

Fig 13

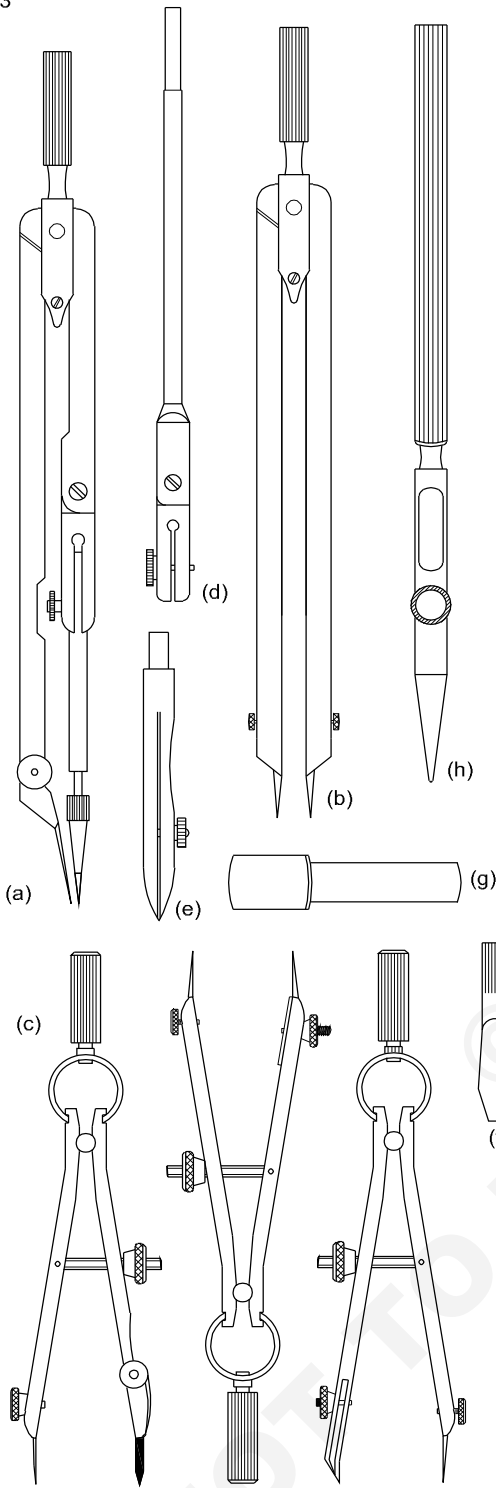

EDNSP11051D

Fig 15




EDNSP11051F

**Bow instruments:** Bow pencil and bow pen compass are used for drawing circles of approximately 25 mm radius. A bow divider is used for marking or dividing smaller spaces. There are two types (i) Integral legs with spring action (ii) two legs are held with a curved spring on top with a handle on it.

Fig 16 shows different types of bow instruments. Adjustments should be made with the thumb and middle finger.


Fig 16

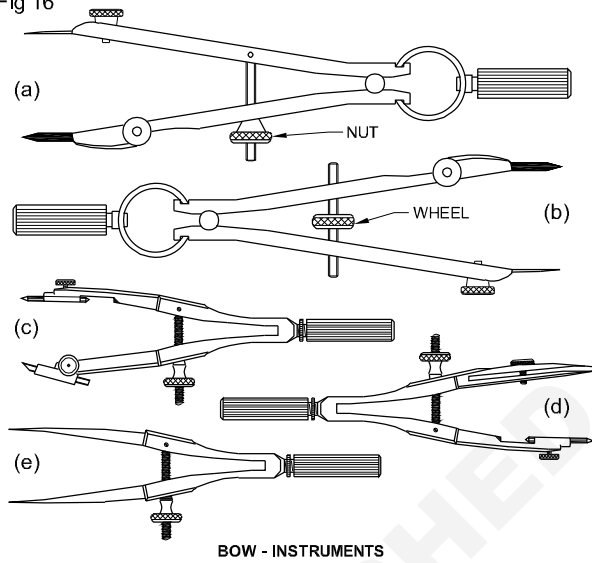

EDNSP11051G

**Drop spring bow pencil and pen (Fig 17):** Drop spring bow pencil and pen are designed for drawing multiple identical small circles. Example: rivet holes, drilled/reamed holes. The central pin is made to move freely up and down through the tube attached to the pen or pencil unit.


Fig 17

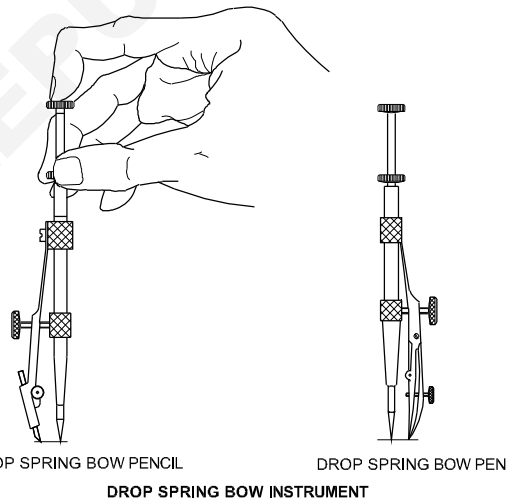

EDNSP11051H


**Inking pen or liner or ruling pen (Fig 18):** It is used to ink the straight lines drawn with the instruments but never for freehand lines or lettering.

Fig 18

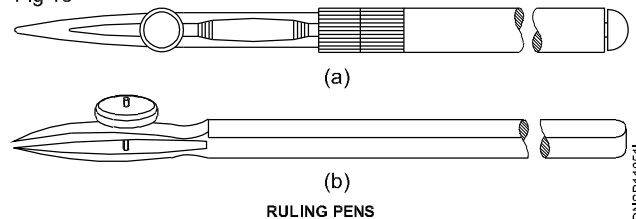


EDNSP11051I

**Lengthening bar** (Fig 19): To draw larger circles, it is fitted to the compass. The pencil point or pen point is inserted into its end.




Replaceable spare pencils, pens and needle points for the compass are available in the instrument box.


**Screwdriver** (Fig 20): Used for adjusting the screws of the instruments.




**Lead case** (Fig 21): Lead case is the box for holding the pencil leads.



**Pin, Clip, Cello tape:** Drawing sheet should be fastened onto the drawing board firmly temporarily so that it does not shake during preparing the drawing. For this purpose, the pins, clips and cello tapes are used (Fig 22)

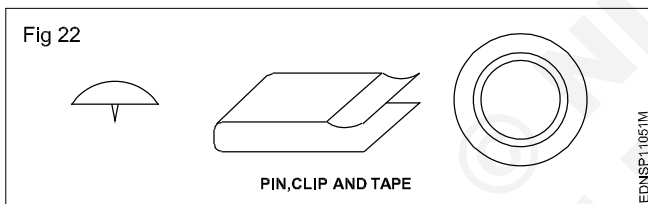

## Pencils, Grade and Selection (Fig 23)

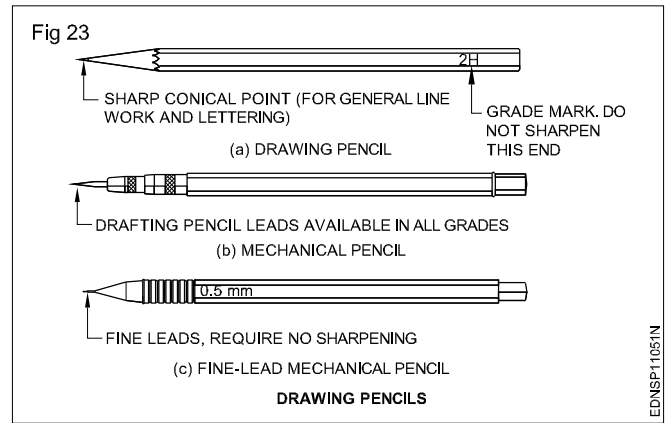

**Grades of pencils:** Pencils are graded according to the hardness or softness of the lead.

**The hardest pencil is 9H grade and the softest pencil is 7B grade.** The selection of the grade of pencils depends on the type of line work required and the paper on which it is used.

Softer lead pencils are used to produce thicker and darker line work, but they wear out quickly. Medium grades of H and 2H are used for general line work as well as for lettering.

**Selection of pencils:** Pencil grades vary from one brand to another brand. Select the grades of the pencil depending upon the type of line work. For construction lines, you can choose 2H or 3H, for lettering and object lines grade H pencils. In general H, HB and 2H are used.

H - medium-hard

HB - medium-soft

2H - hard

Now-a-days automatic (Mechanical) pencils or clutch pencils are available in different sizes (lead dia. 0.3, 0.5, 0.7 or 0.9). Leads can be replaced as per the required grade of hardness. They produce lines of uniform width without sharpening.




**Free hand drawing of - Geometrical figures and blocks with dimension**

**Freehand sketching:** Apart from making drawing using instruments, often craftsmen will be required to make drawings with their free hand.


Freehand sketching is the easiest method to express the shape of a piece part or a component by an engineer or craftsman.

Freehand sketches are not usually made to scale. However, they should be as nearly to the proportions as possible.


**Cube (Fig 1)**

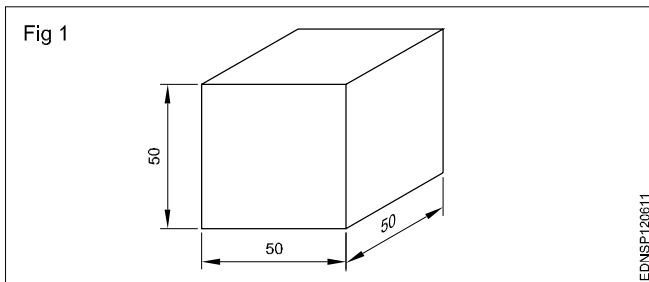


**Square block (Fig 2)**

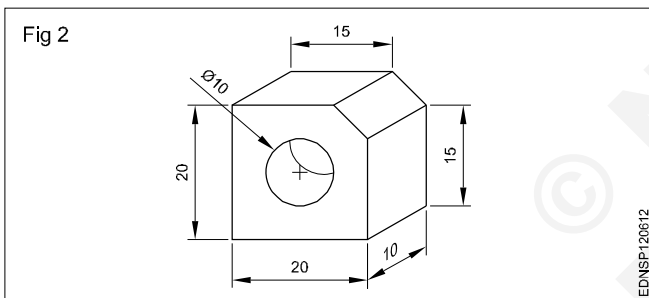


**Rectangular block (Fig 3)**

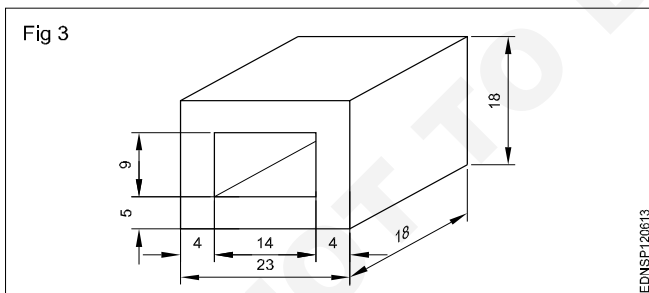


**Cube block (Fig 4)**

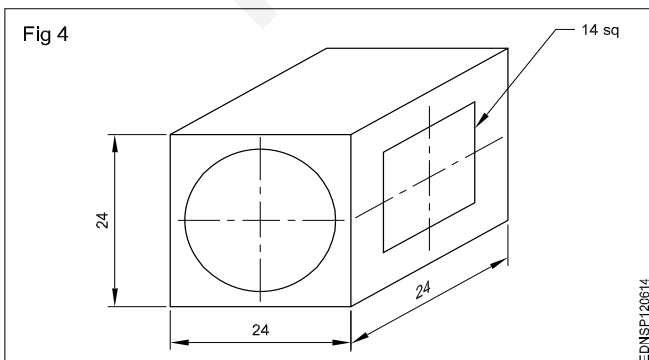

**Cylinder (Fig 5)**

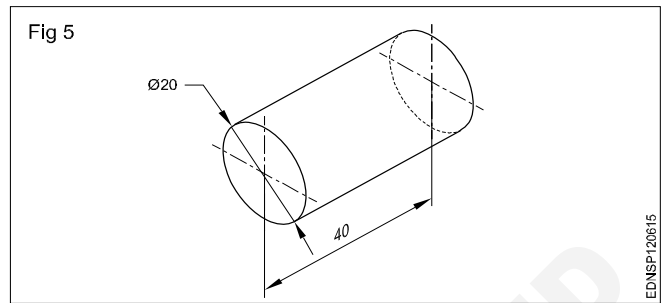


**Materials for free hand sketching:** A4 size sheet (preferably a pad instead of loose papers) pencils of soft grade. Example H, HB, and a good quality eraser are the only materials required. For drawing different darkness, the pencil points should be sharpened to a conical shape. Fig 6 shows some free hand sketches of different types of views.

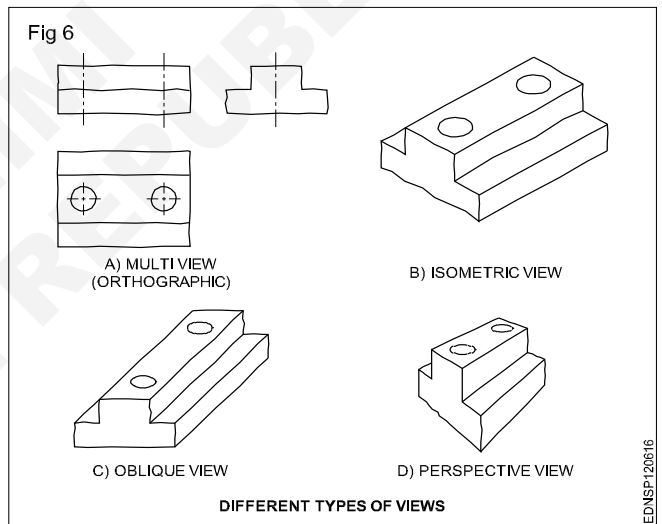

**Procedure**

Freehand drawing of solid figures, cubes, cuboids, cone, prism, pyramid, frustum of a cone with dimensions

**Cube (Fig 1)**

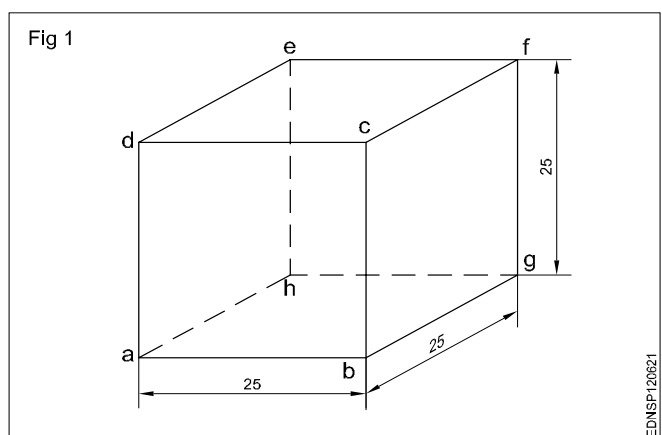




- Draw squares of a, b, c and d.
- Draw 30° from points b, c and d for the length of 25mm.
- Mark point g from b, f from c and e from d as shown in the figure.
- Joint all points.

### Cuboid (Fig 2)


Draw the isometric drawing of a cuboid of base 60 mm x 40 mm and the height of 20 mm. (Fig 2)

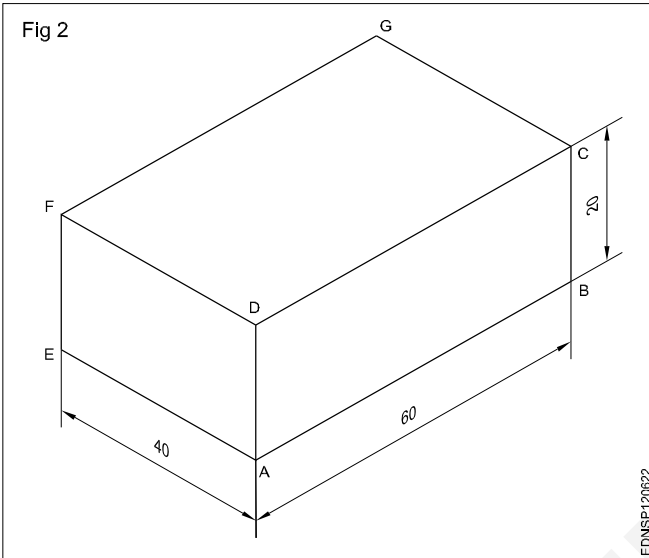


Draw the three isometric axes through the point 'A'.

- Mark AB = 60mm, AE = 40mm and AD = 20mm representing the three sides of cuboid.
- Draw two vertical lines EF and BC parallel to AD from points E and B respectively.
- Similarly, draw two more lines parallel to AB and AE to mark G's interesting point from F and C.
- Draw lines parallel to DC and FG. Draw lines parallel to DF and GC.
- Join all the points.


### Cylinder (Fig 3)

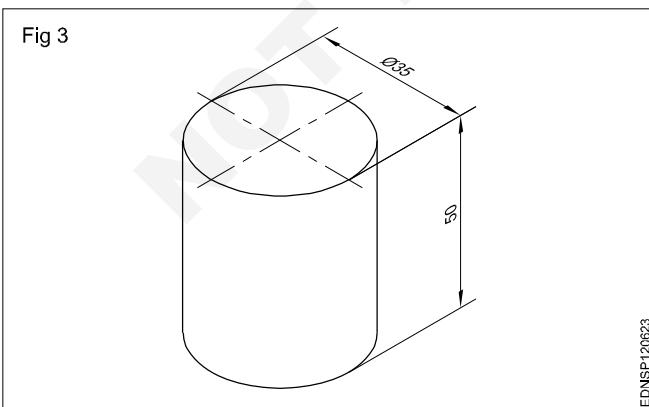


### Rectangular prism (Fig 4)

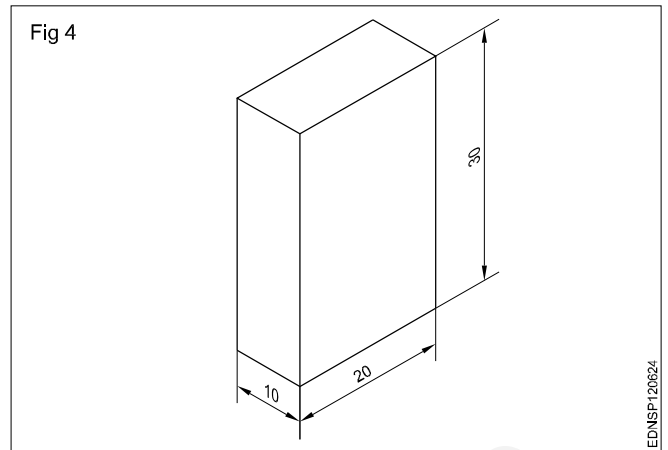


### Square Prism (Fig 5)

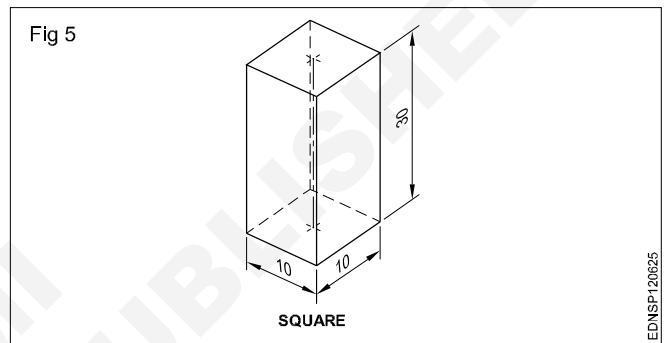


### Triangular Prism (Fig 6)

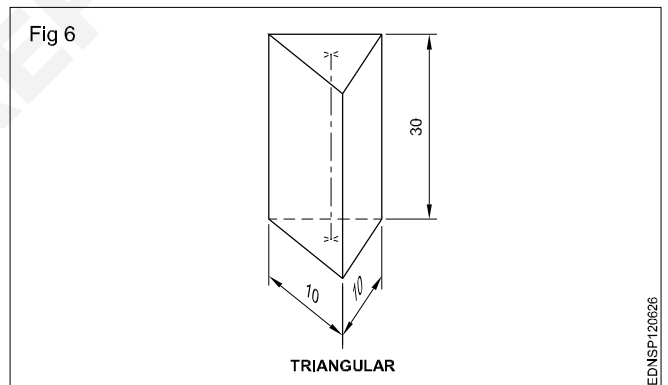


### Pentagonal prism (Fig 7)

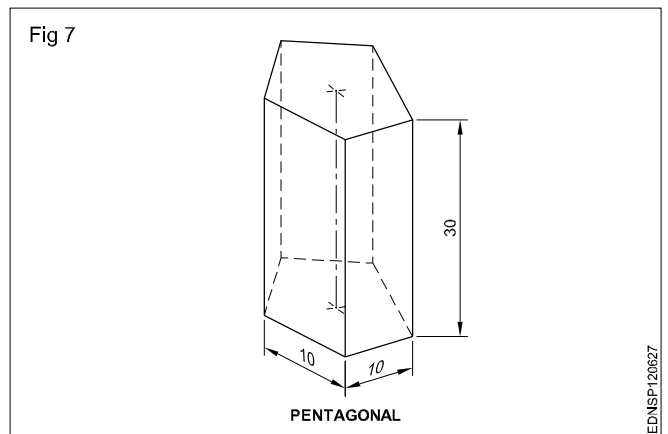

## Hexagonal prism (Fig 8)

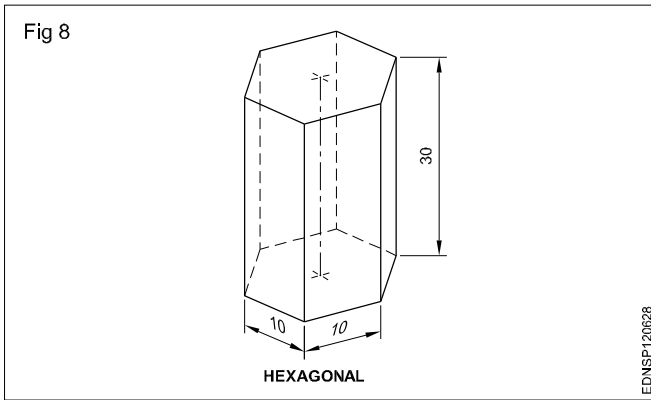

**Cone:** When a right-angled triangle revolves about one of its sides forming the right angle, a cone is generated. Cone forming has a circular face and a slant curved surface. (Fig 9)

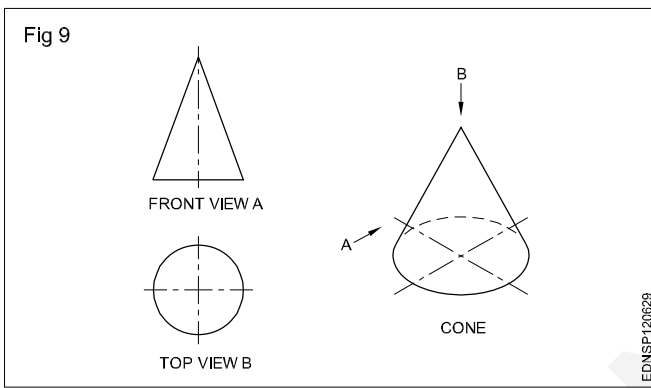

**Pyramids:** Pyramids are polyhedron solids having a base surface whose shape may be triangular, square or polygon and as many slant triangular faces as there are sides in the base. All the slant triangular faces join at a common point called APEX.

Similar to prisms, pyramids also are known by the shape of their base viz triangular, square, rectangular, pentagonal, hexagonal etc. The imaginary line joining the centre of the base to the apex is called the AXIS.

Fig 10 shows some pyramids and their views.

When a semi-circle revolves about its diameter a sphere is generated. A sphere has no flat surface. (Fig 11D)

**Frustums:** Pyramid/cone is cut parallel to the base and the top portion is removed. The remaining bottom portion is called the frustum of a pyramid/cone.

If the cutting plane is at an angle to the axis/base, the pyramids or cones are called "Truncated pyramids or cones".



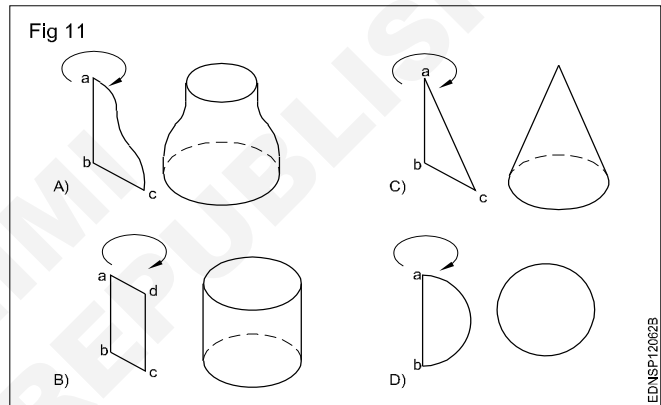


Fig 12 shows frustums and truncated pyramids.

All items we use are solids. Their shapes may confirm individual geometrical solids like prisms, cones or other combinations.

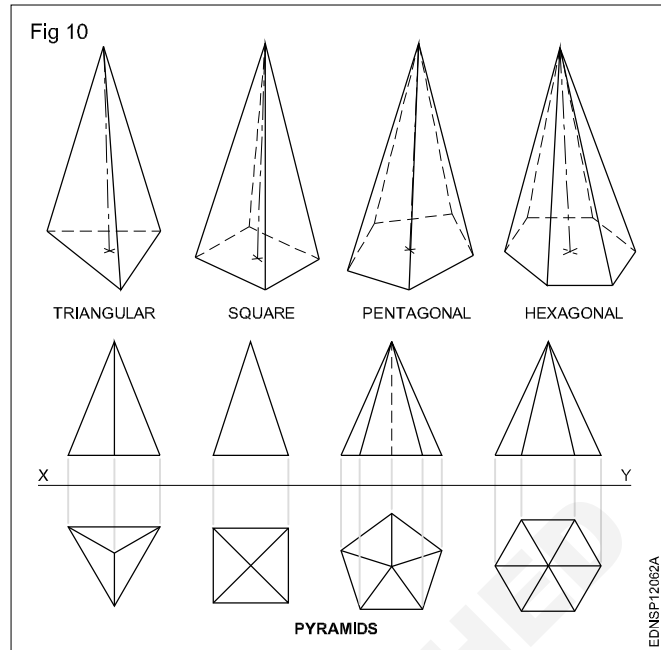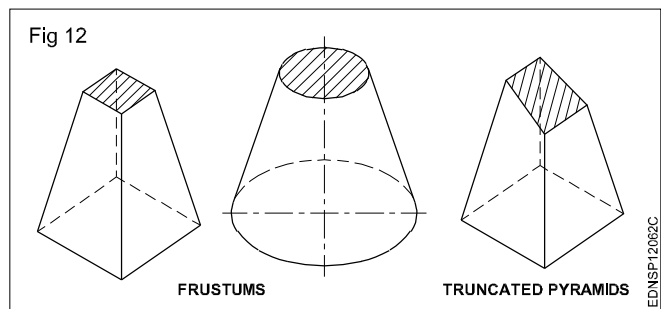

Free hand drawing of - Transferring measurement from the given object to the free hand sketches




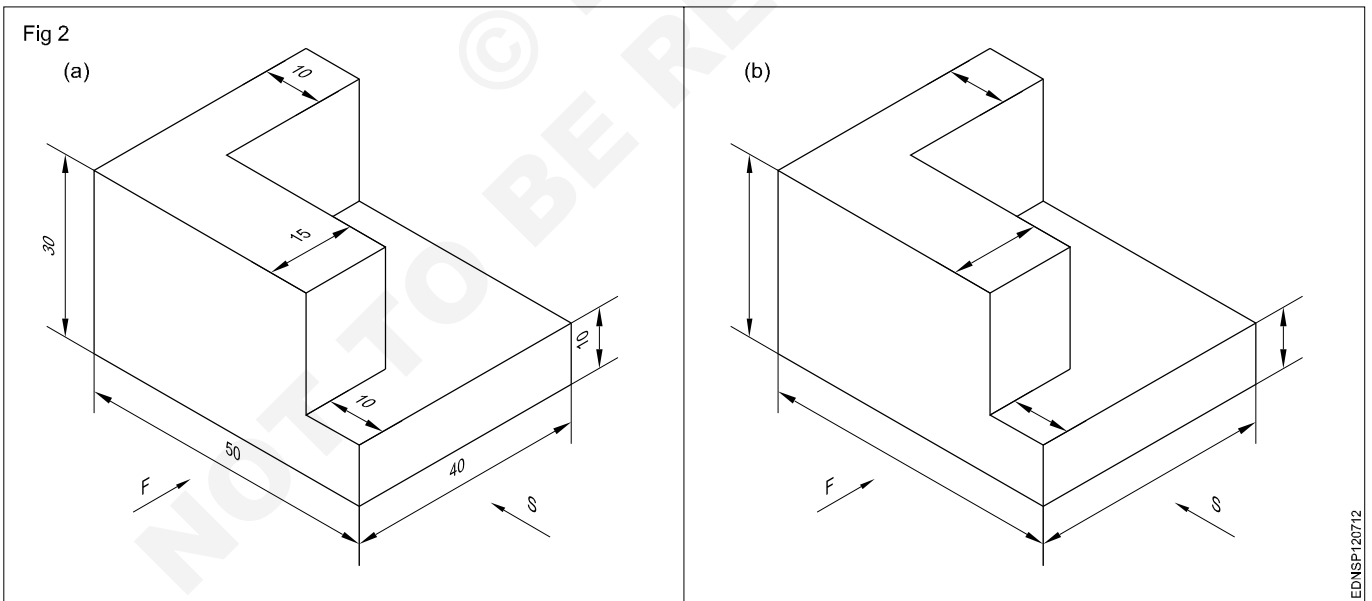


Fig 3

(a)

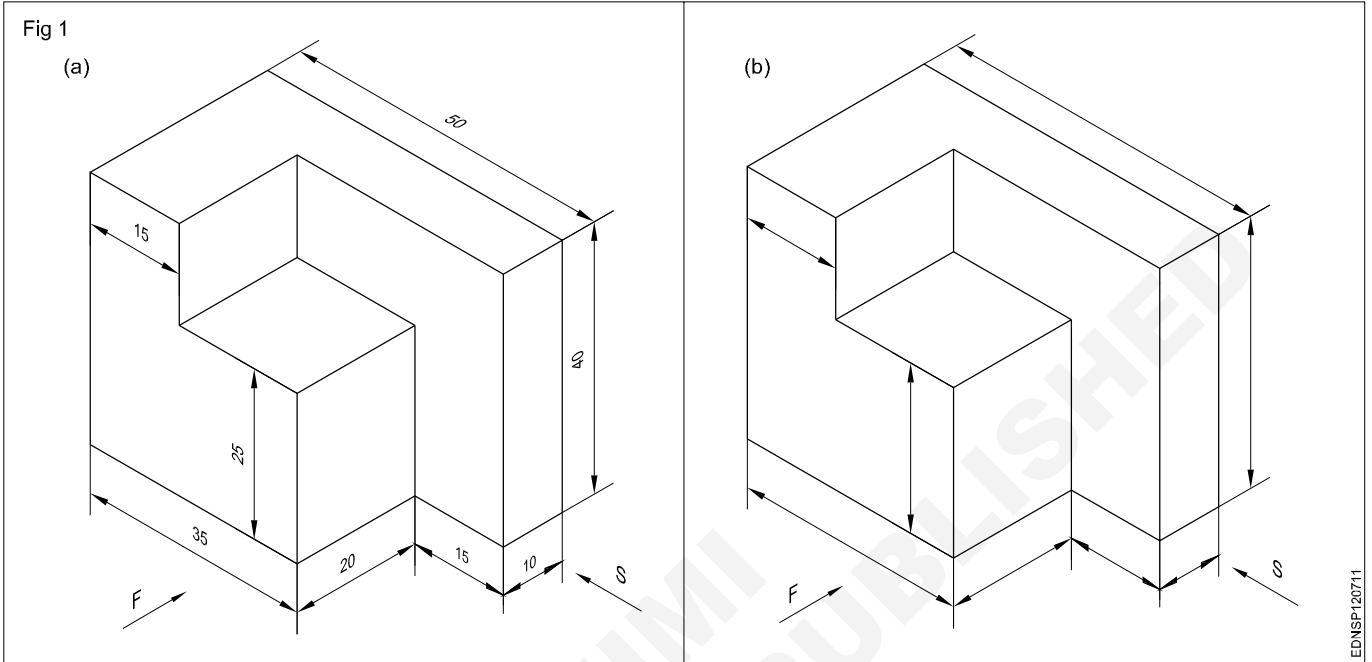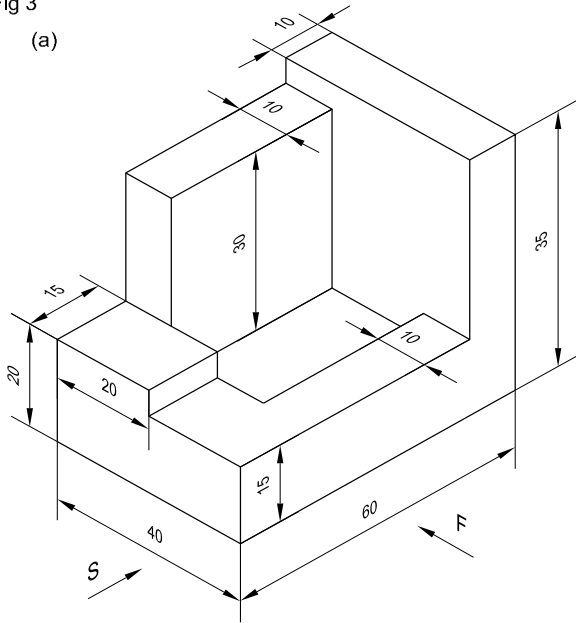


(b)

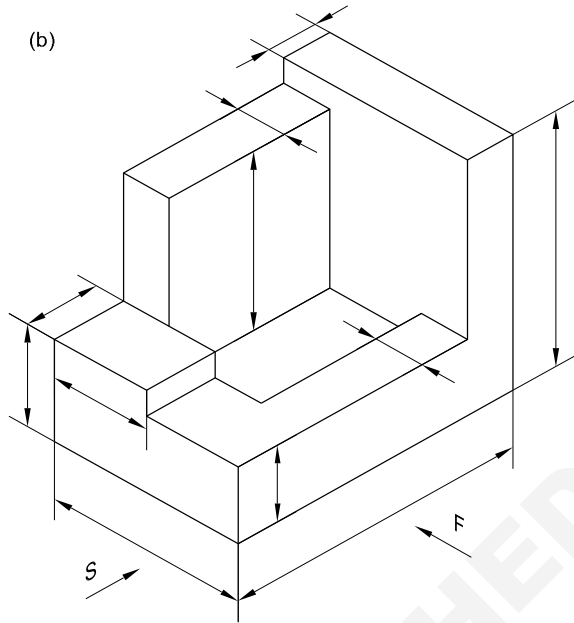


EDNSP120713

Fig 4

(a)

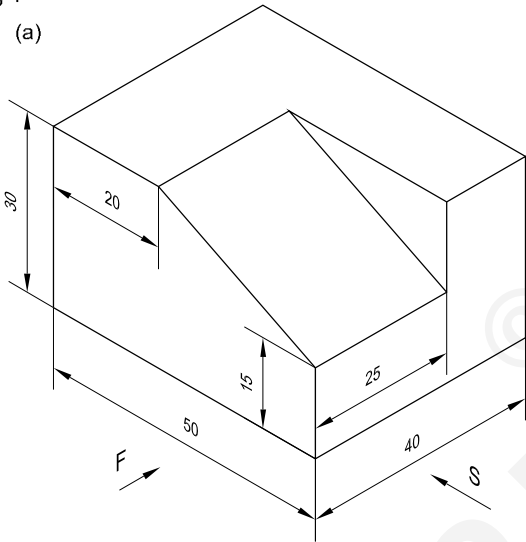


(b)

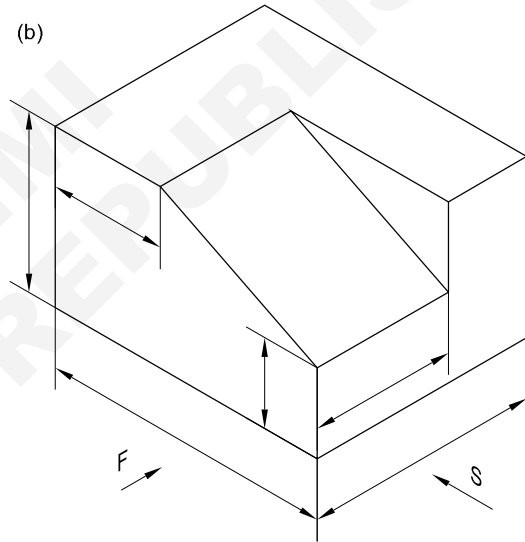


EDNSP120714

Fig 5



(a)

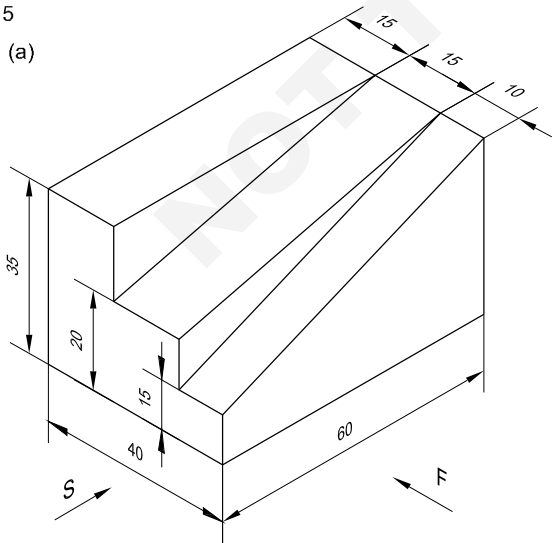



(b)

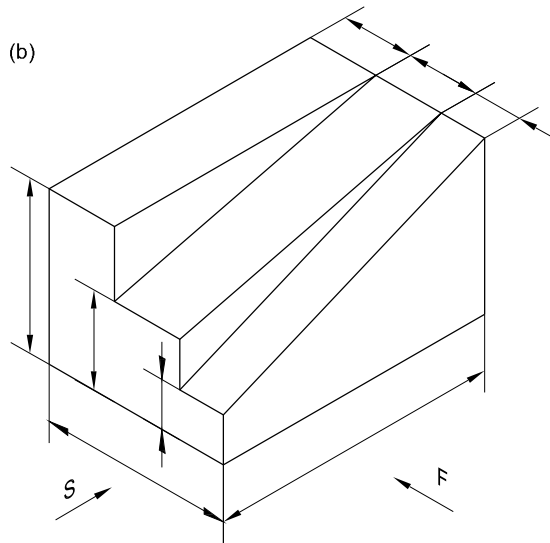



EDNSP120715

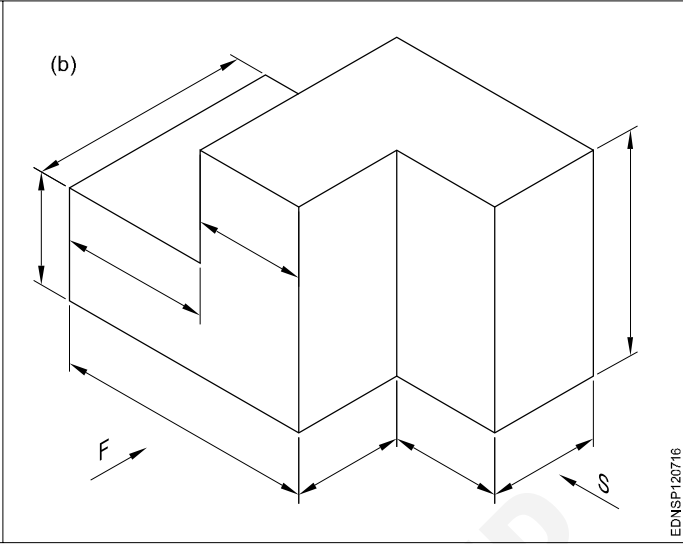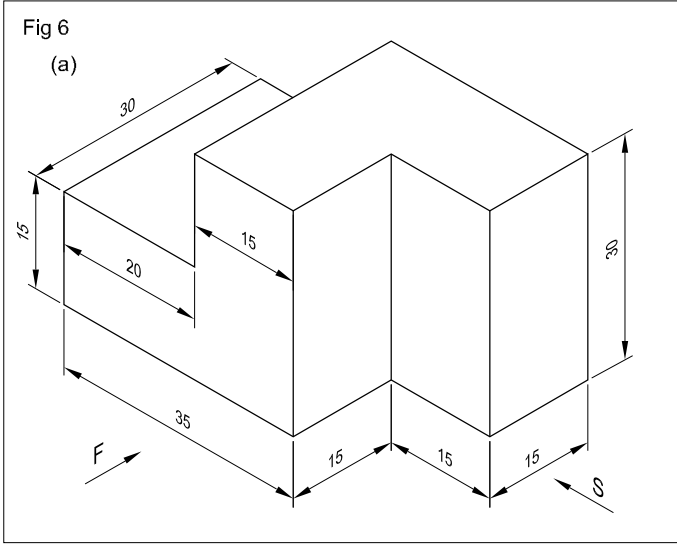

EDNSP120716

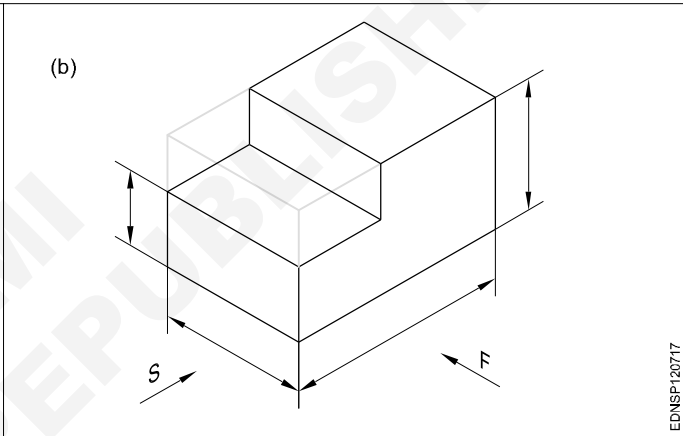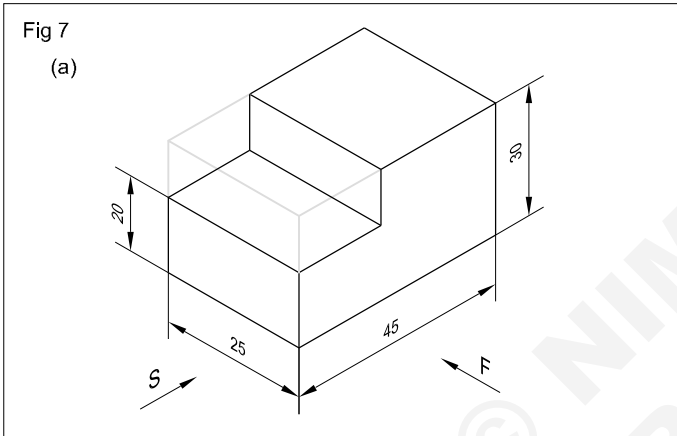


EDNSP120717

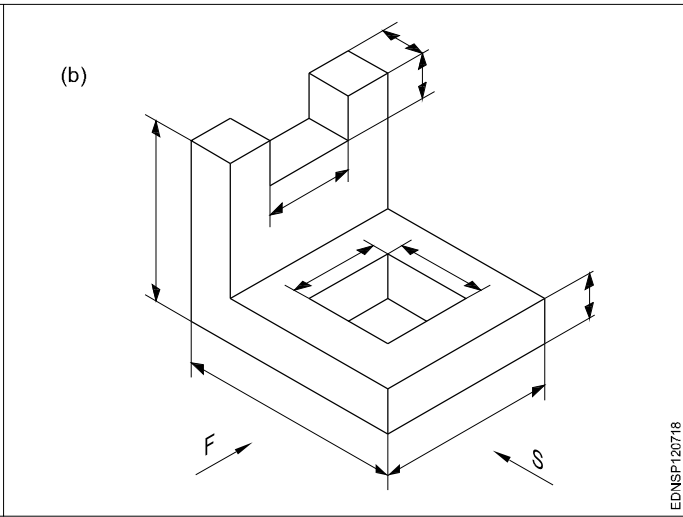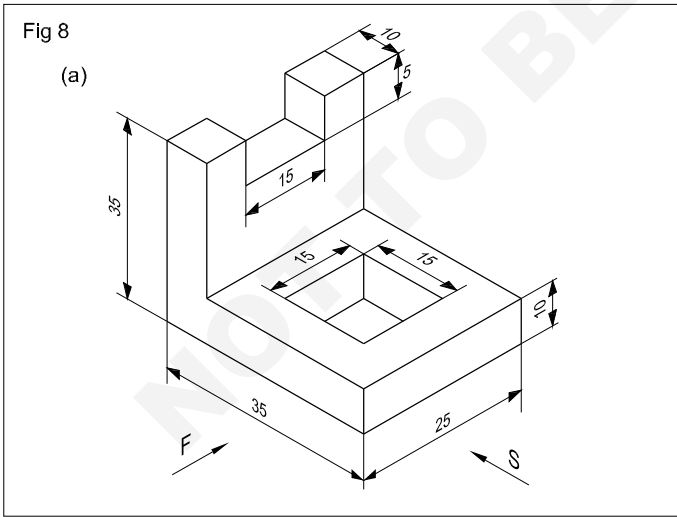


EDNSP120718

Fig 9

(a)

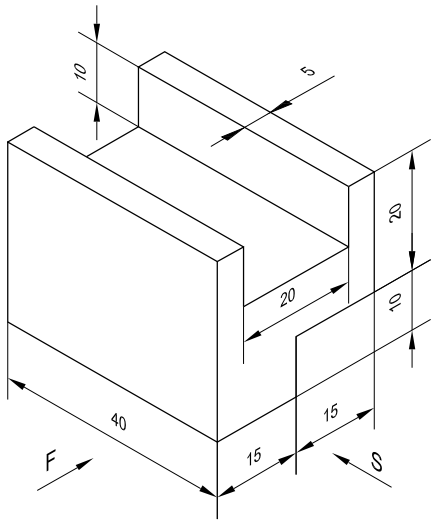


(b)

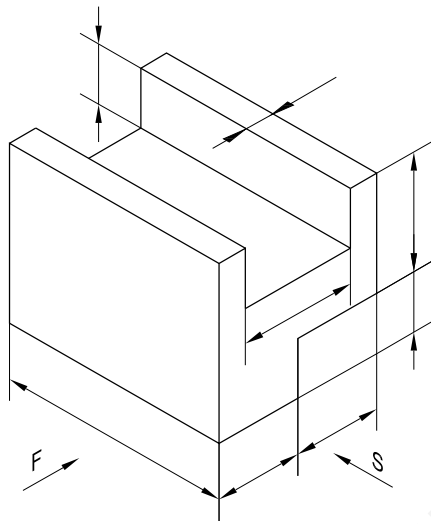


EDNSP120719

Fig 10

(a)



(b)




EDNSP12071A

**Free hand drawing of hand tools and measuring tools**


**Hand Tools**

Files (Fig 1)


- a Curved cut file
- b Rasp cut file
- c Single cut file
- d Double cut file

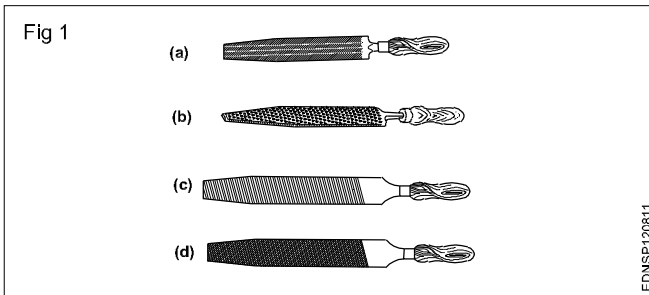


Scriber (Fig 2)

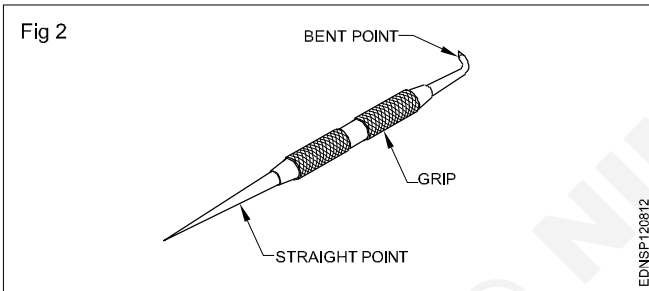


Divider (Fig 3)

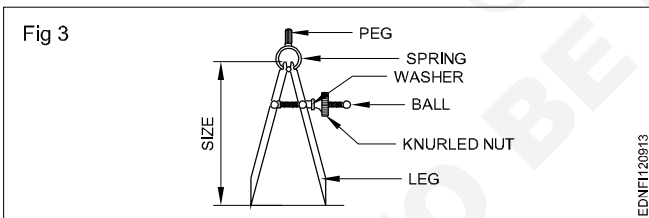


Outside caliper (Fig 4)

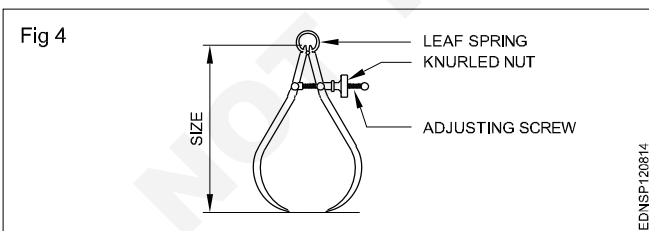


Inside caliper (Fig 5)

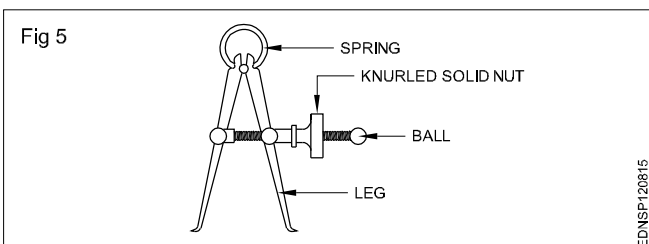


Hacksaw (Fig 6)

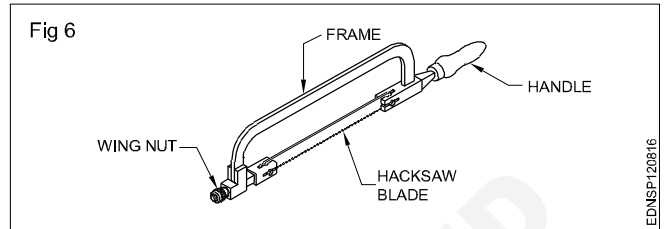


Ball pein hammer (Fig 7)

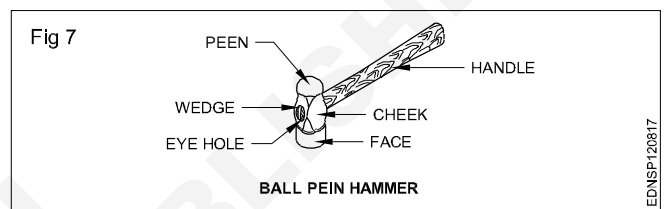


Chisel (Fig 8)

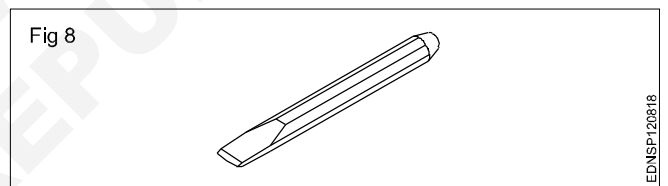

'C' clamp (Fig 9)

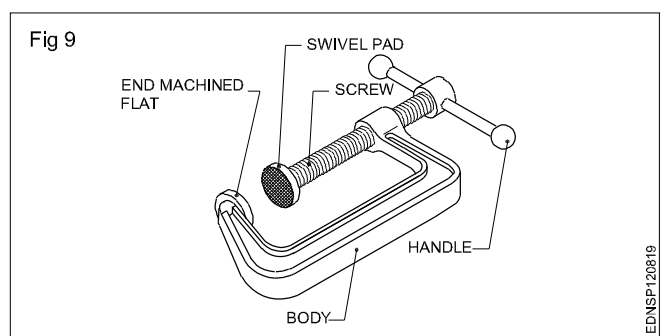

Screw driver (Fig 10)

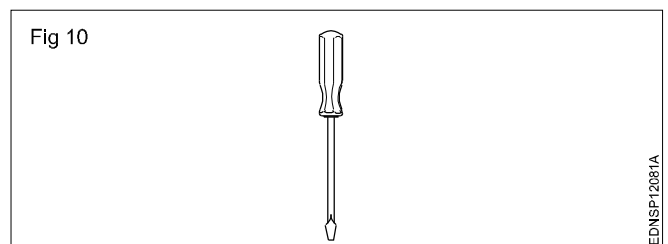

EDNSP120816

EDNSP120817

EDNSP120818

EDNF1120813


EDNSP120814

EDNSP120819


EDNSP120815

EDNSP12081A


Bench vice (Fig 11)

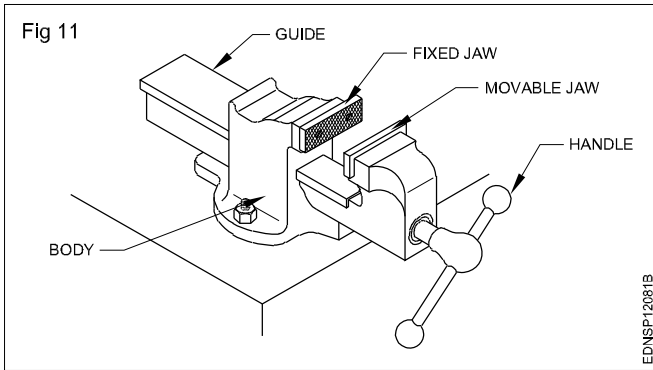


Centre punch (Fig 12)

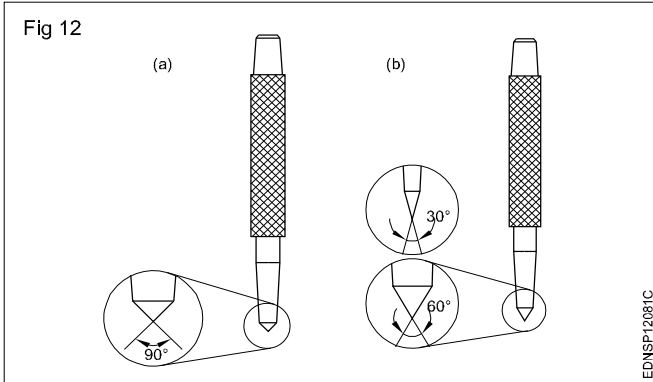


Cutting plier (Fig 13)

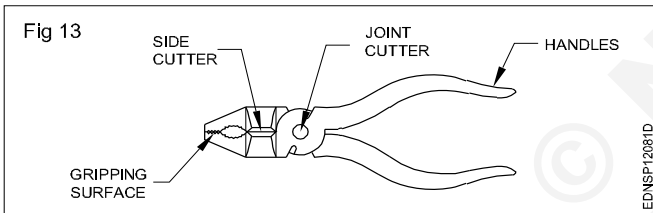


Open-end spanner (Fig 14)

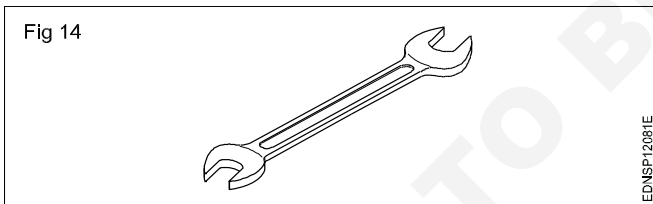

Surface gauge (Fig 15)

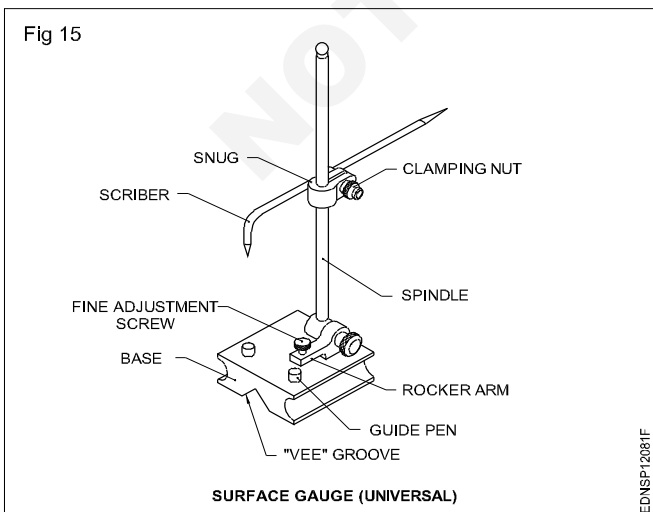


Hammers (Fig 16)

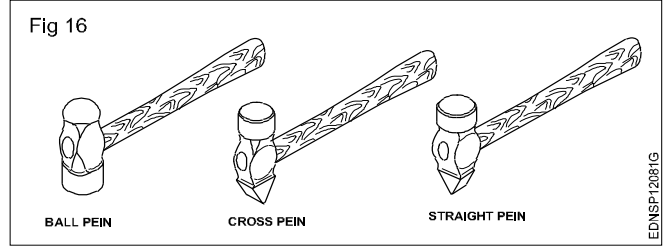


Measuring Tools


Steel rule (Fig 17)

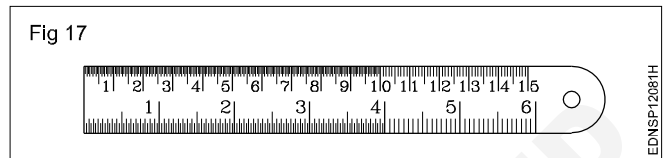


Try square (Fig 18)

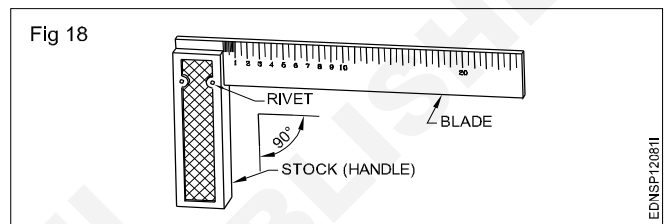


Vernier caliper (Fig 19)

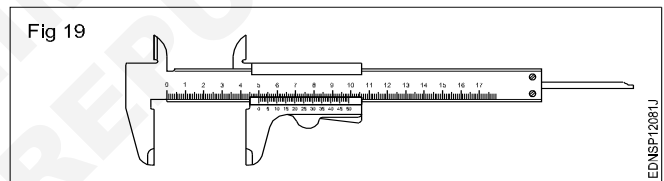

Micrometer (Fig 20)

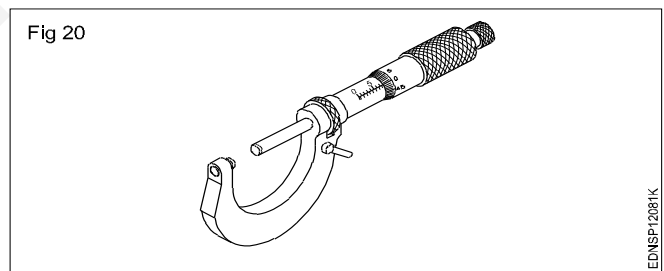


Vernier height gauge (Fig 21)

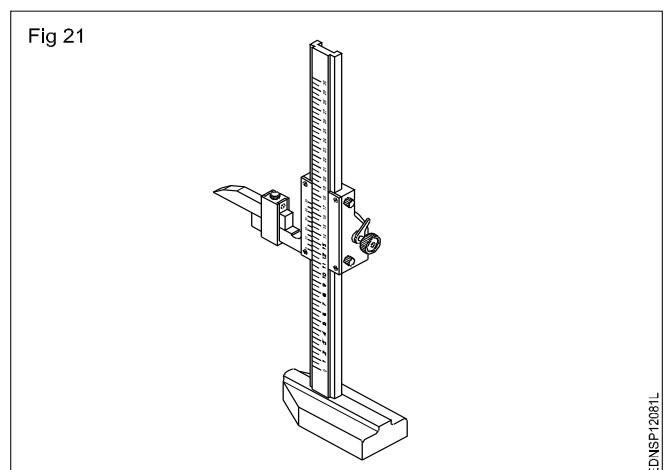





Feeler gauge (Fig 22)

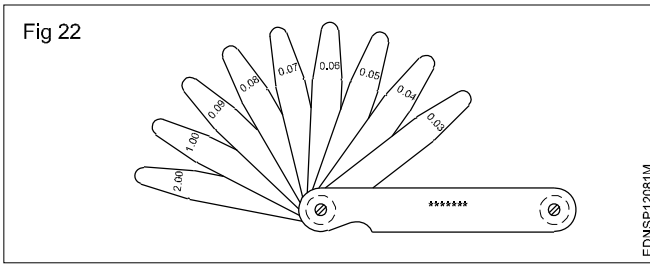


Bevel protractor (Fig 23)

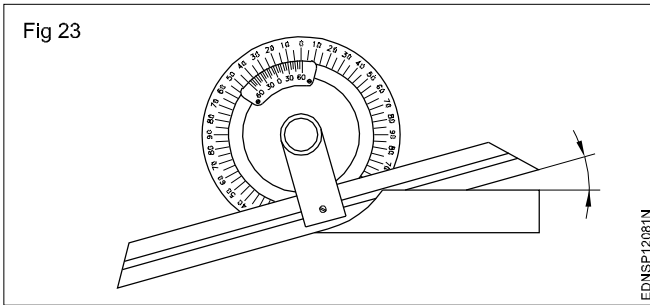


Slip gauge box (Fig 24)

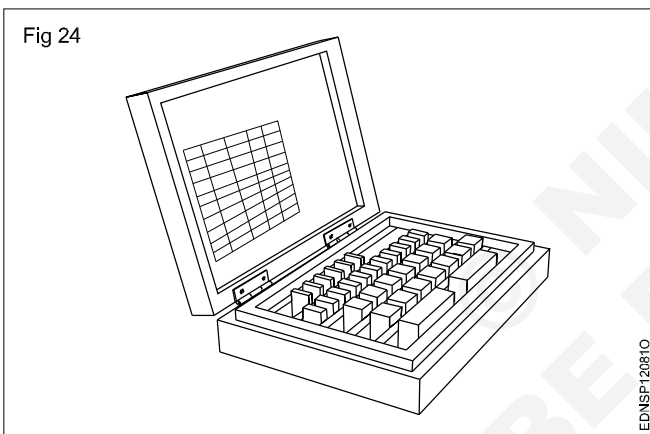


Sine bar with dial gauge (Fig 25)

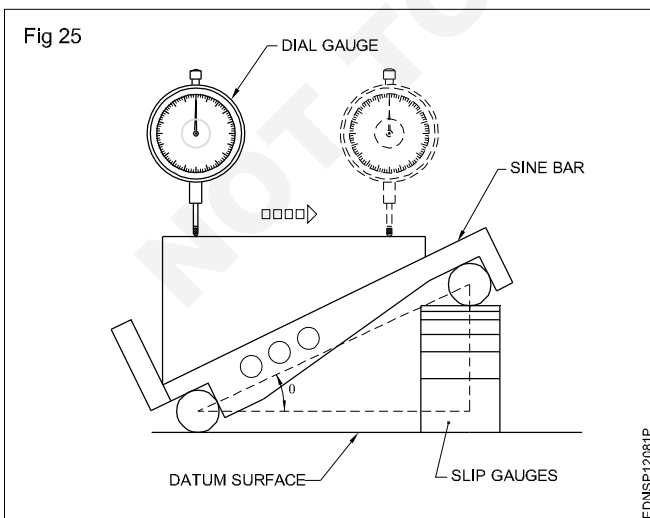


Combination set (Fig 26)

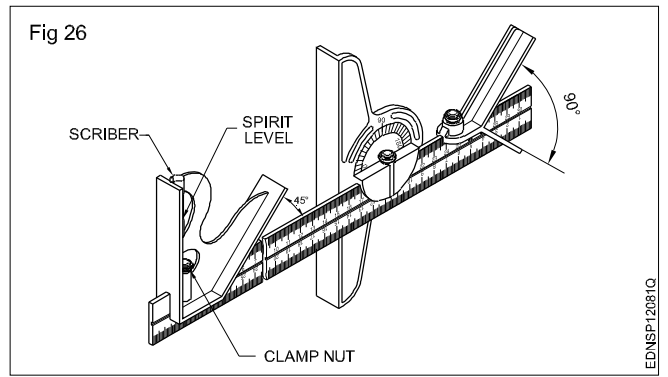

Vernier depth gauge (Fig 27)

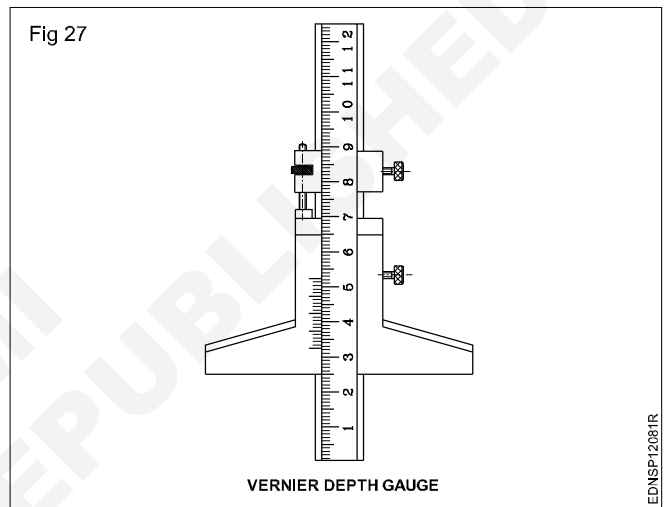


Depth micrometer (Fig 28)

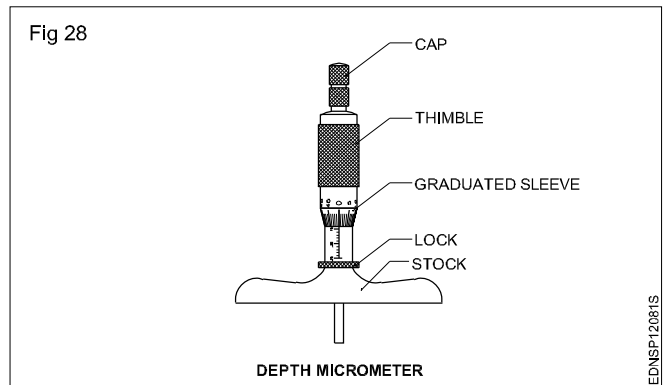


**Hand Tools**


Screwdriver (Fig 29)

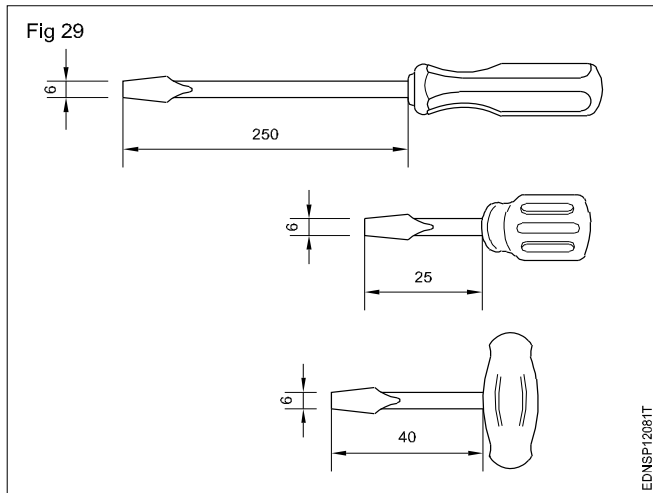


Screwdriver with cross-type tips (Fig 30)

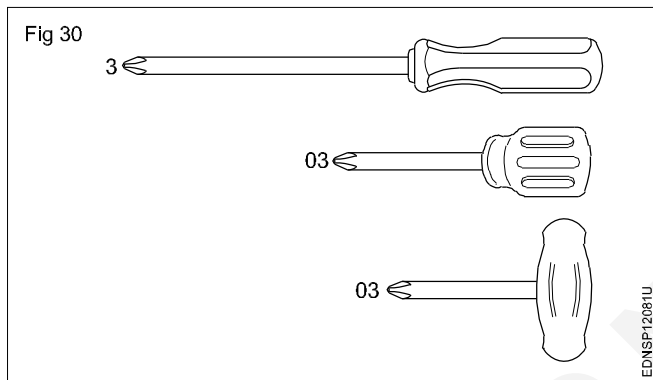


Screw tips aided screw heads (Fig 31)

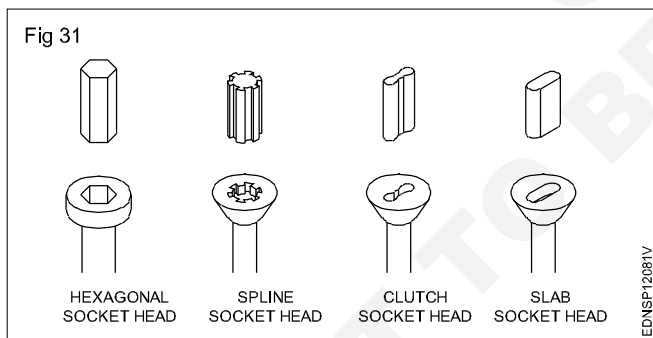


Instrument screwdriver (Fig 32)

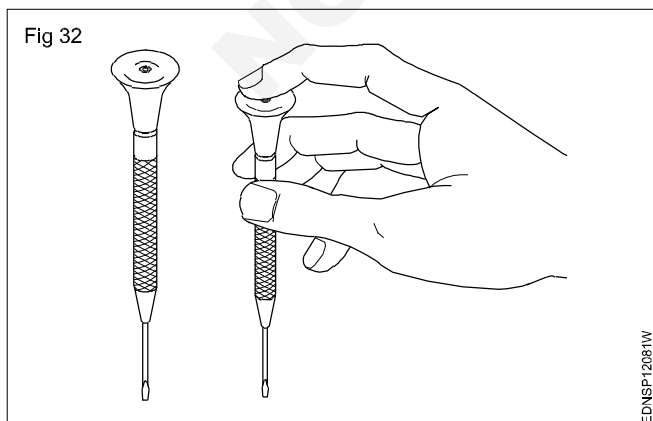


Screwdriver interchangeable tips (Fig 33)

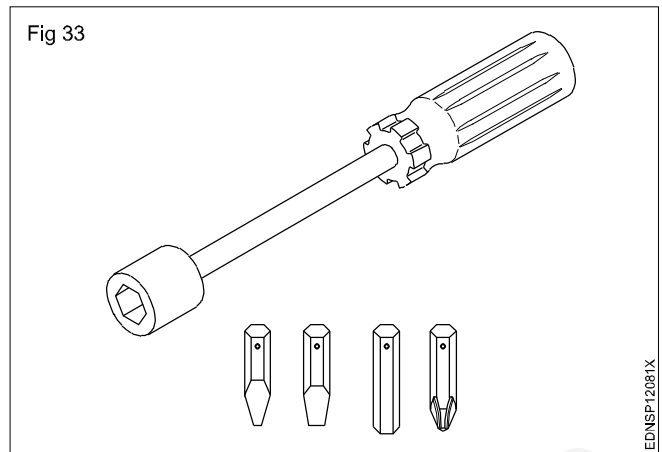


Special type screwdriver (two rectangular recesses) (Fig 34)

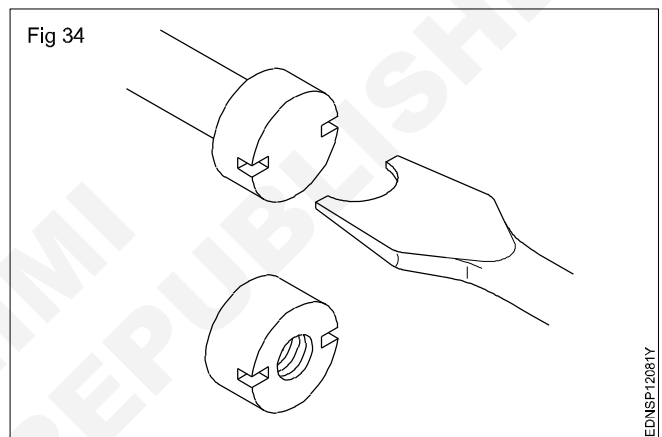


Special type screwdriver (two round recesses) (Fig 35)

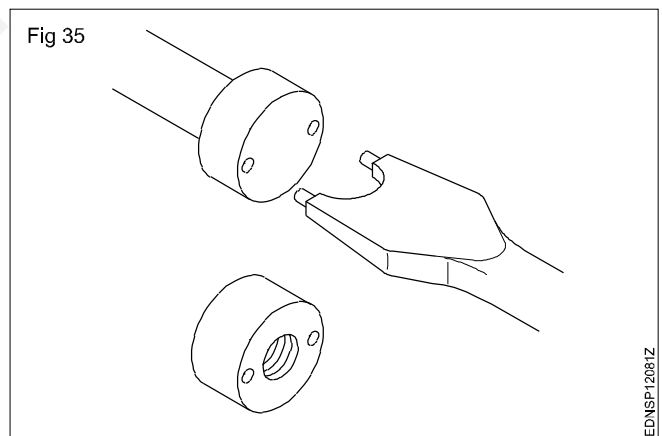


Pliers (Fig 36)

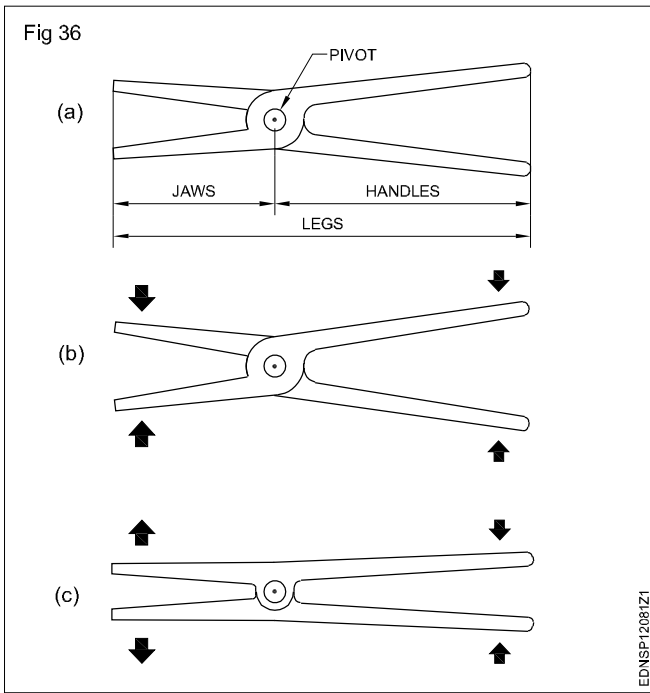


Analog multimeter (Fig 37)

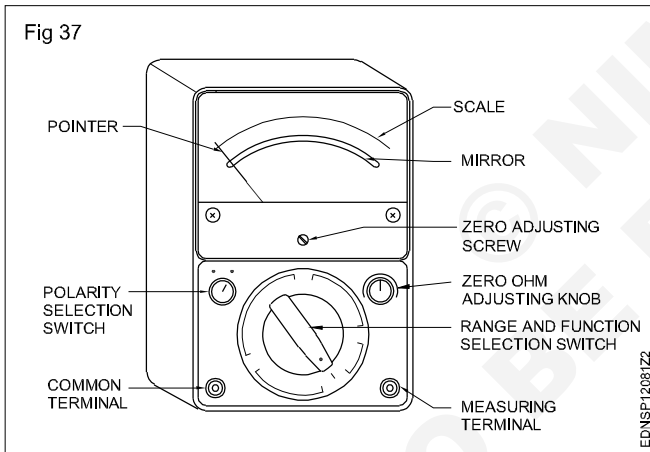


Adjustable spanner (Fig 38)

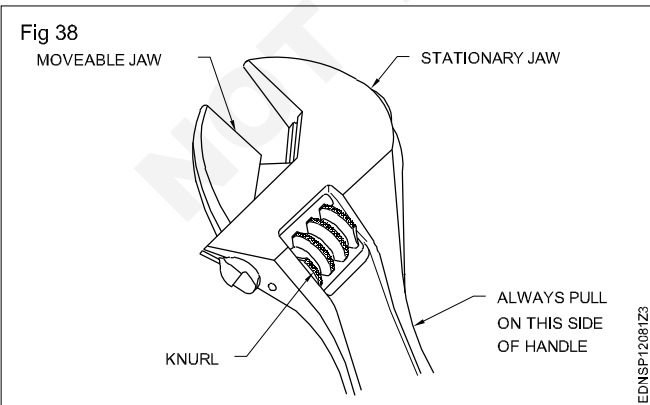


Soldering iron (Fig 39)

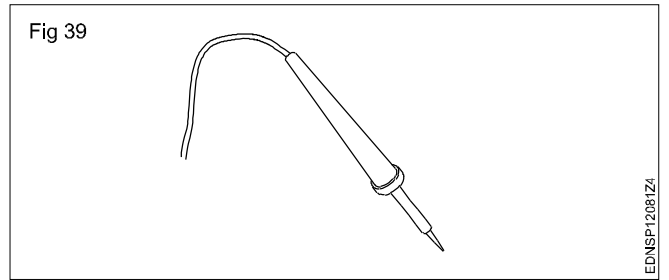


Ratchet brace (Fig 40)

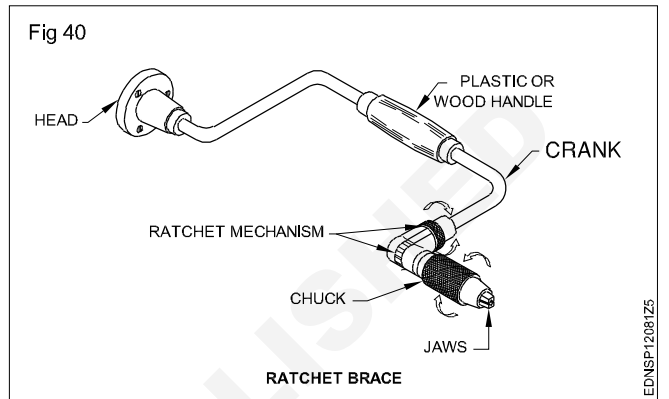


Neon Tester (Fig 41)

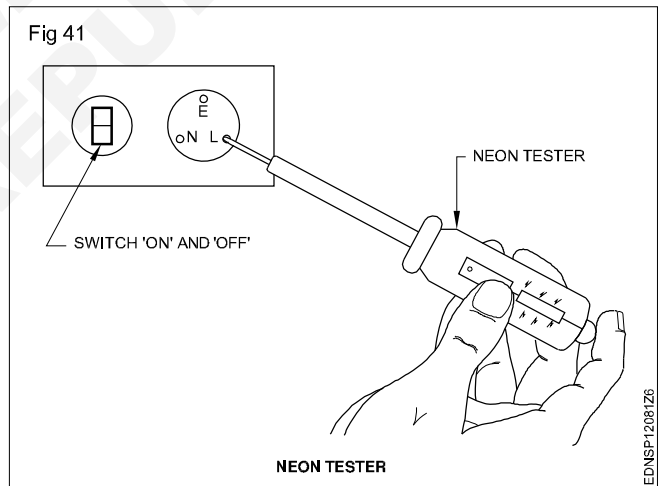


Gimlet (Fig 42)

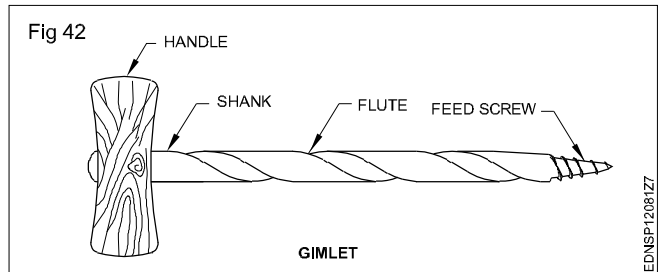


Bradawl & poker (Fig 43)

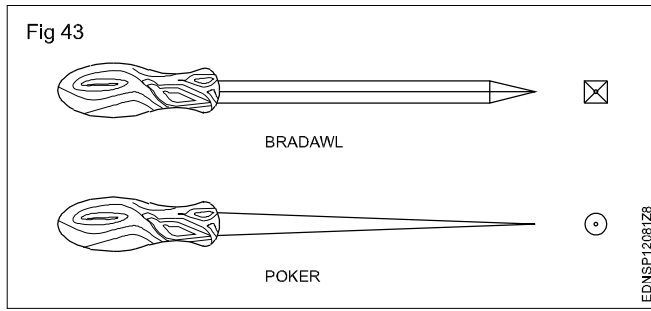


Electrician's knife (Fig 44)

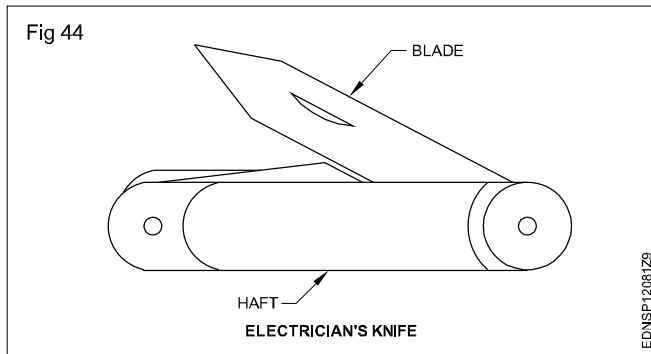


Mallet (Fig 45)

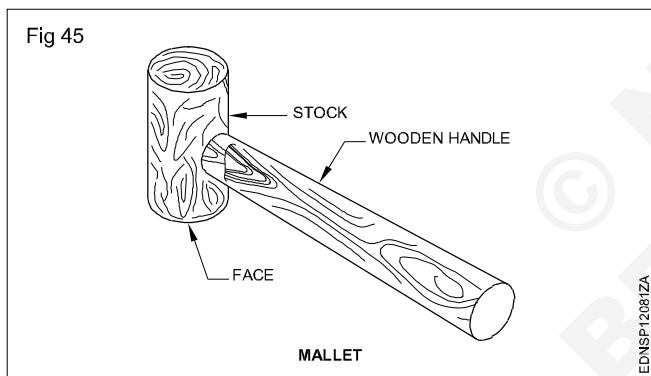


Electric drilling machine (Fig 46)

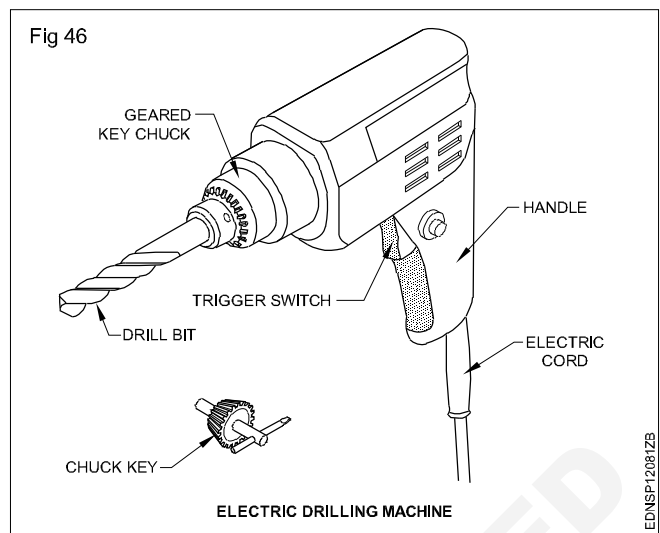

Hand drill (Fig 47)

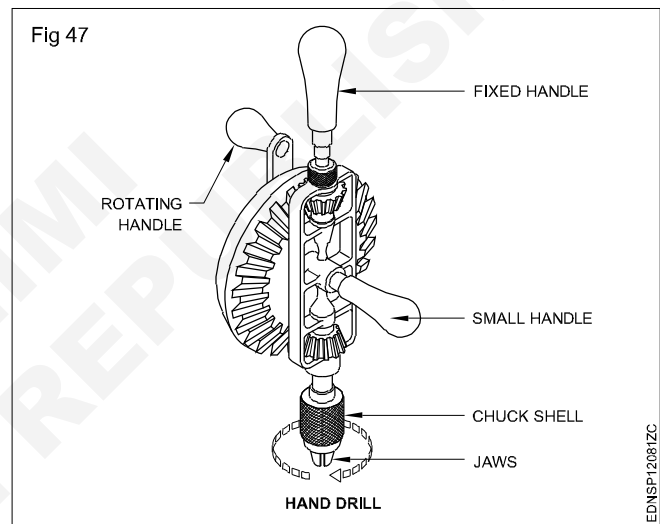


Rawl plug tool (Fig 48)

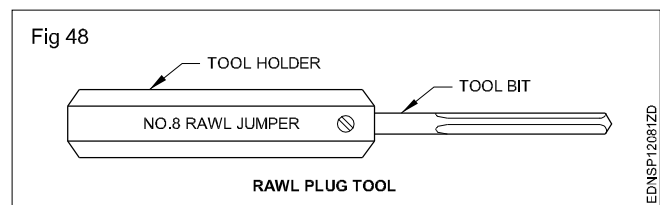


Drawing of geometrical figures - Angle & triangle

**Angles:** Angle is the inclination between two straight lines meeting at a point or meeting when extended. AB and BC are two straight lines meeting at B. The inclination between them is called an angle. The angle is expressed in degrees or radians.


**Concept of a degree:** When the circumference of a circle is divided into 360 equal parts and radial lines are drawn through these points, the inclination between the two adjacent radial lines is defined as one degree. Thus a circle is said to contain  $360^\circ$ . (Fig 1)

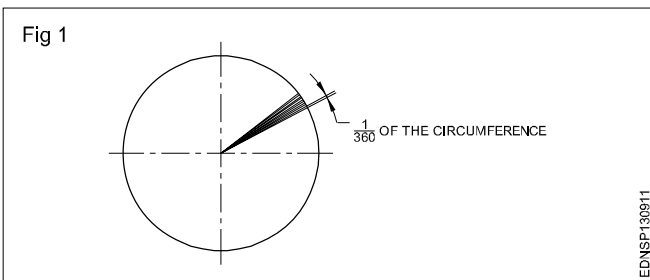


**Acute angle:** An angle that is less than  $90^\circ$  is called an acute angle. (Fig 2)

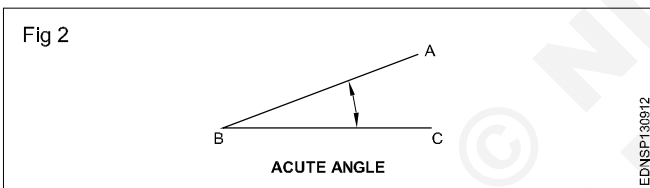


**Right angle:** The angle between a reference line and a perpendicular line is called a right angle. (Fig 3)

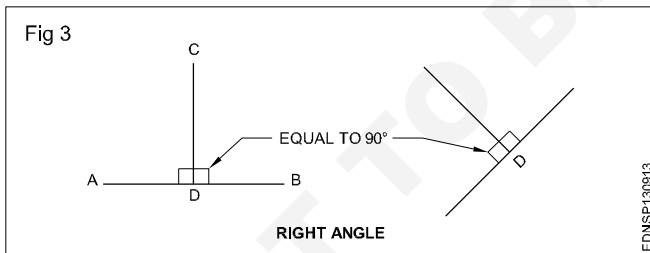


**Obtuse angle:** This refers to an angle between  $90^\circ$  and  $180^\circ$ . (Fig 4)

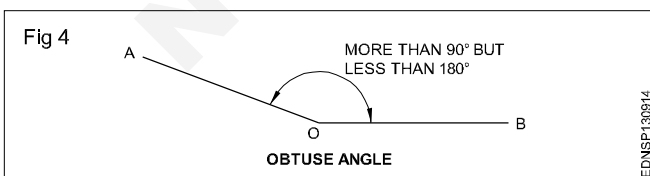


**Straight angle:** This refers to an angle of  $180^\circ$ . This is also called the angle of a straight line. (Fig 5)

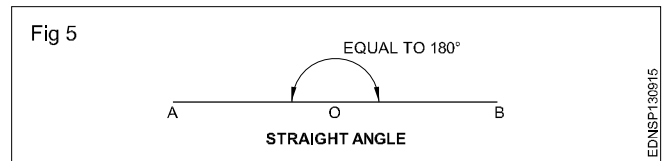


**Reflex angle:** It is the angle that is more than  $180^\circ$ , but less than  $360^\circ$ . (Fig 6)

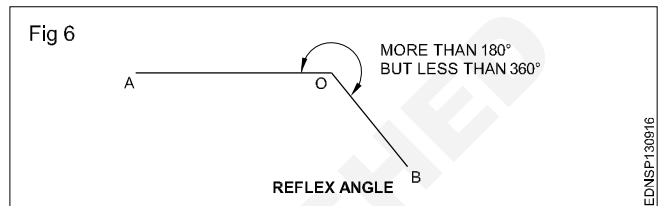


**Adjacent angles:** These are the angles lying on either side of a line. (Fig 7)

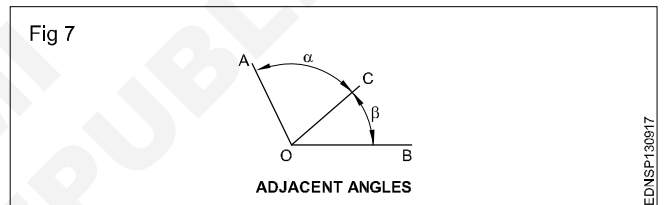

**Complementary angles:** When the sum of the two angles is equal to  $90^\circ$ , angle POQ + angle QOR =  $90^\circ$  angle POQ and angle QOR are complementary angles to each other. (Fig 8)

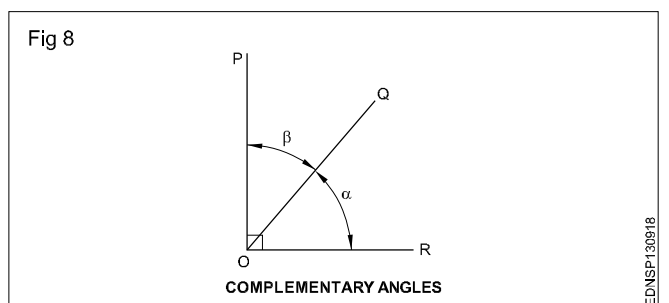

**Supplementary angle:** When the sum of the two adjacent angles is equal to  $180^\circ$ , for example, angle SOT + angle TOY =  $180^\circ$ , angle SOT and angle TOY are supplementary angles to each other. (Fig 9)

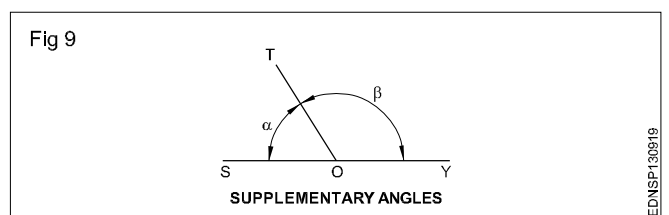

## Triangle - different types


Triangle is a closed plane figure having three sides and three angles. The sum of the three angles always equals to  $180^\circ$ .

To define a triangle, we need to have a minimum of three measurements as follows:


- 3 sides or
- 2 sides and one angle or
- 2 angles and one side

### Types of triangles


**1 Equilateral triangle** is a triangle having all the three sides equal. Also all the three angles are equal ( $60^\circ$ ). (Fig 1)

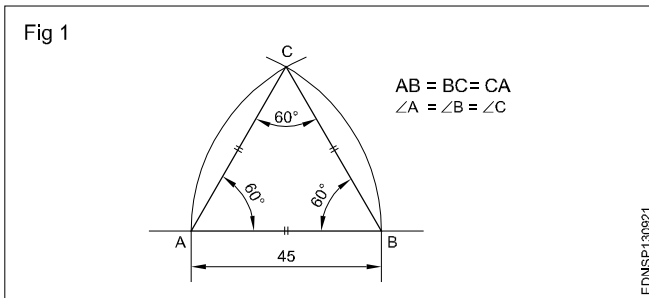

**2 Isosceles triangle** has two of its sides equal. The angles opposite the two equal sides are also equal. (Fig 2)

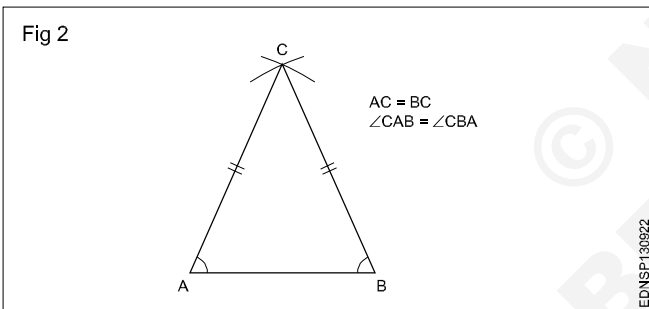

**3 Scalene triangle** has all three sides unequal in length. All three angles are also unequal. (Fig 3)

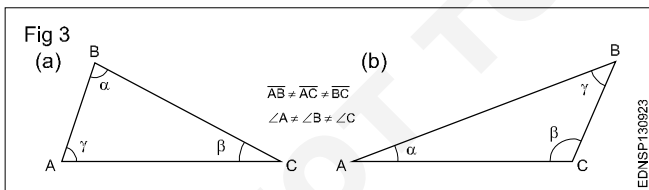




**4 A right-angled triangle** is one in which one of the angles is equal to  $90^\circ$  (Right angle). The side opposite the right angle is called the hypotenuse. (Fig 4)

**5 An Acute angled triangle** is one in which all the three angles are less than  $90^\circ$ . (Fig 5)

**6 Obtuse angled triangle** has one of the angles more than  $90^\circ$ . (Fig 6)

**The sum of the three angles in any triangle is equal to  $180^\circ$ .**


**The sum of any two sides is more than the third side.**

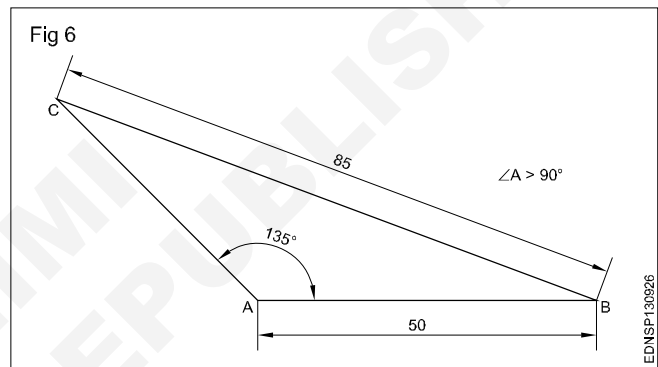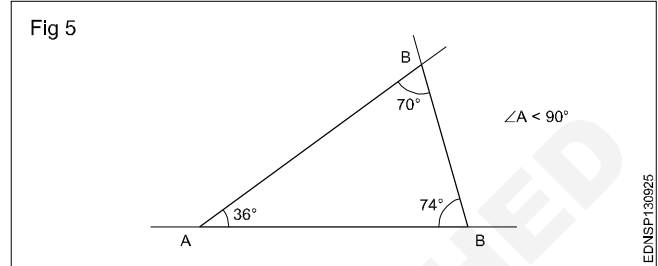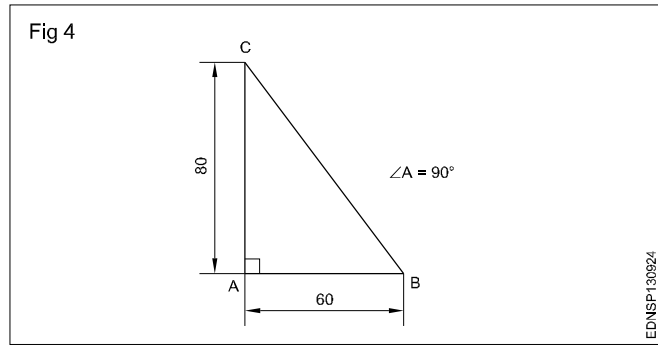

### Procedure to draw the triangle


**1 Equilateral triangle (Fig 1)  $AB = BC = CA = 35$  mm.**

- Draw a line and mark AB 35 mm side of the triangle.
- Draw radius from centre A and B, arcs cutting mark at C (Fig 1).
- Join CA and CB.
- ABC is a required triangle.

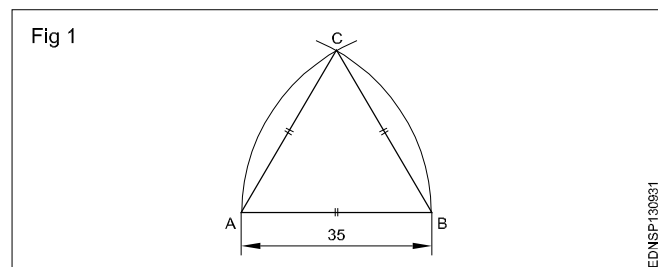


**2 Isosceles triangle :  $AB = AC = 60$  mm &  $\angle BAC = 40^\circ$ .**

- Draw the side AB equal to 60 mm. 'A' as the centre, draw an arc of radius AB.
- Draw a line AC at  $40^\circ$  to AB.
- Join BC to form the triangle ABC. (Fig 2)

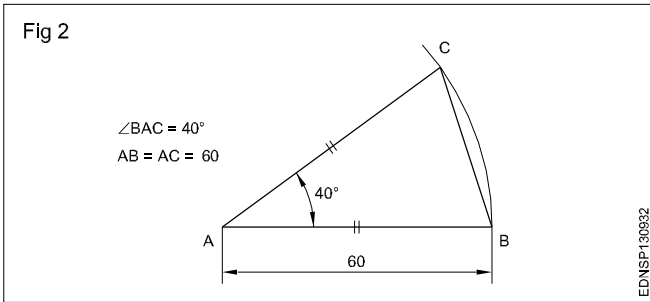


**Exercise**

- 1 **Scalene triangle:  $AB = 30$  mm,  $AC = 55$  mm &  $BC = 35$  mm. (Fig 1)**

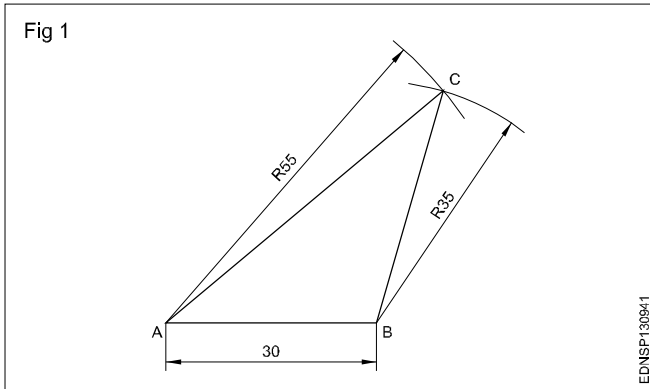


- 2 **Scalene triangle:  $AB = 70$  mm. (Fig 2)**


$\angle ABC = 40^\circ$  &  $\angle BAC = 110^\circ$

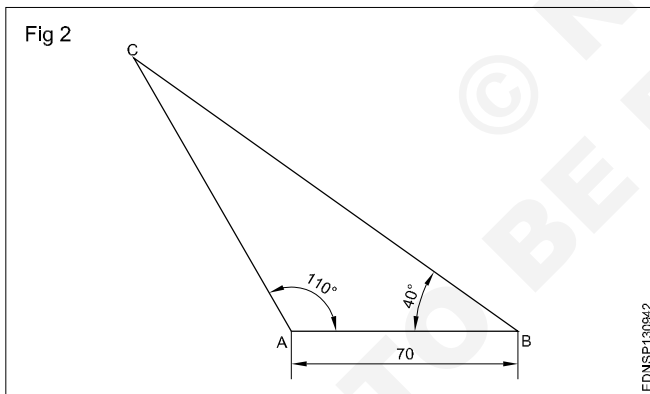


- 3 **Right angled triangle:  $AB = 60$  mm,  $BC = 45$  mm. (Fig 3)**

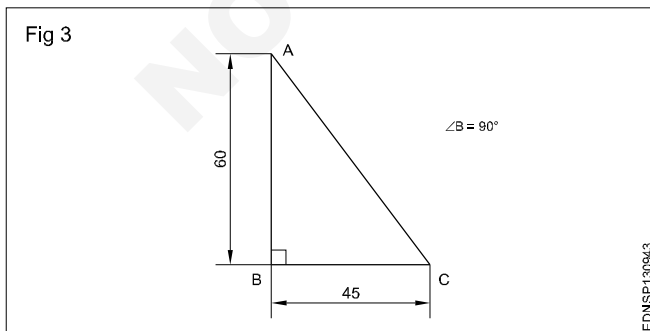


- 4 **Draw a triangle when one side and 2 angles being given in Fig 4.**

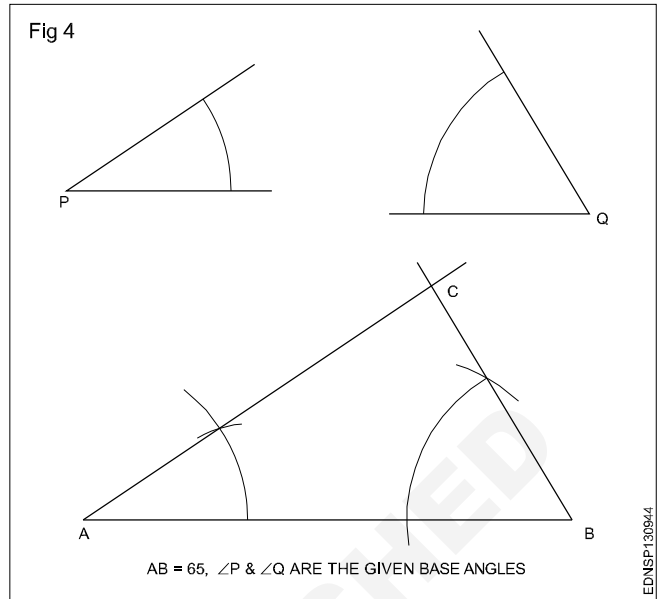

- 5 **Draw a right angled triangle when the base and hypotenuse being given in Fig 5.**

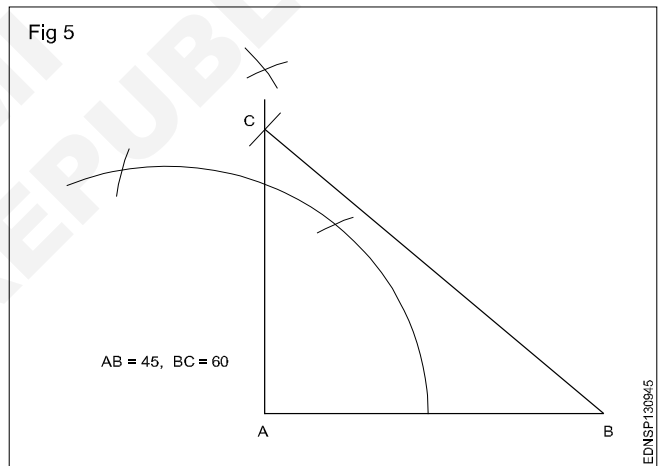

- 6 **Draw a triangle with the altitude and two sides being given in Fig 6.**

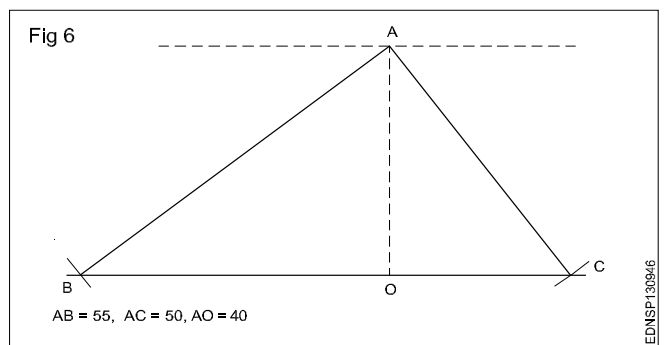

**Drawing of geometrical figures - Circle**

**Circle:** Circle is a plane figure bounded by a curve, formed by the locus of a point which moves so that it is always at a fixed distance from a stationary point the "Centre".

**Radius:** The distance from the centre to any point on the circle is called the "Radius".

**Diameter:** The length of a straight line between two points on the curve, passing through the centre is called the "Diameter". (D: Dia or d) It is twice the radius.

**Circumference:** It is the linear length of the entire curve, equal to  $\pi D$ .

**Arc:** A part of the circle between any two points on the circumference or periphery is called an 'Arc'.

**Chord:** A straight line joining the ends of an arc is called the chord. (Longest chord of the circle is the diameter)

**Segment:** A part of the circle or area bound by the arc and chord is the segment of the circle.


**Sector:** It is the part of a circle bounded by two radii (plural of radius) meeting at an angle and an arc.

**Quadrant:** Part of a circle with radii making  $90^\circ$  with each other is a quadrant (one-fourth of the circle).

Half of the circle is called a semi-circle.



**Tangent:** The tangent of a circle is a straight line just touching the circle at a point. It does not cut or pass through the circle when extended.

Fig 1 shows all the above elements.

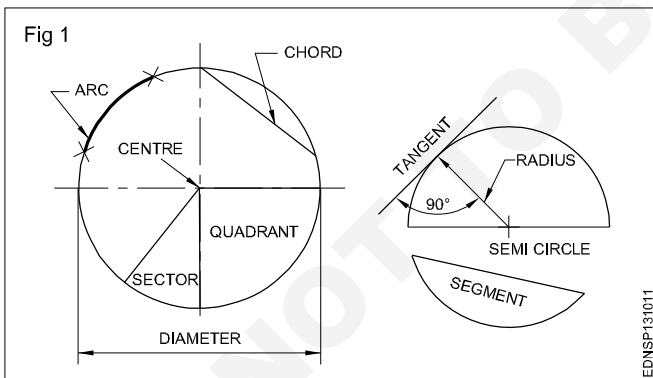

**Concentric circles:** When two or more circles (drawn) have a common centre, they are called concentric circles. Ball-bearing is the best example of concentric circles. (Fig 2)


**Eccentric circles:** Circles within a circle but with different centres are called eccentric circles. (Fig 3)

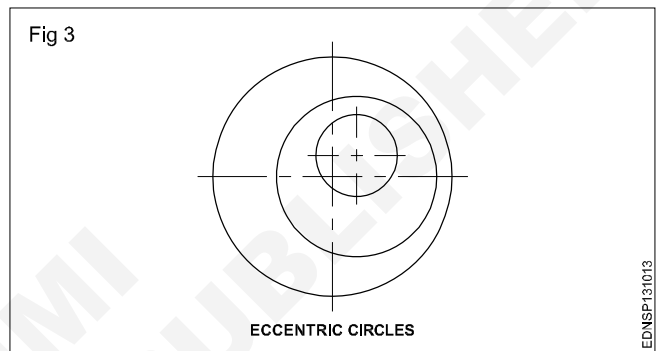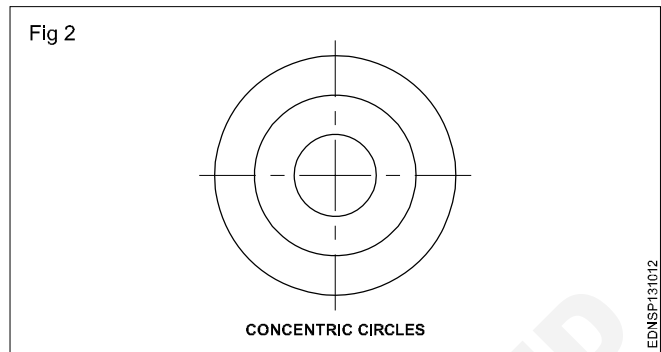

**Circle and Arcs**


**Exercise**

**1 Draw a tangent to a given circle of  $\phi$  50 mm at any point 'P' on it. (Fig 1)**

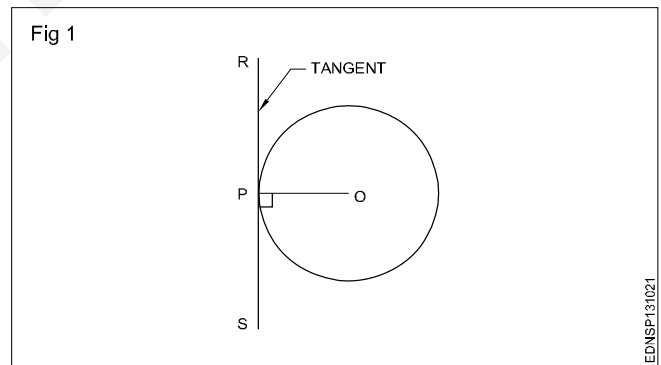

**2 Draw a loop of 3 circles pattern. (Fig 2)**

Draw any line MN and mark points A,B and C. So that AB = 20 mm and BC = 25 mm.

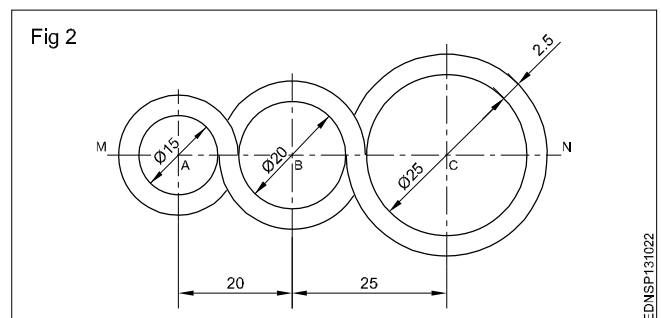






Drawing of geometrical figures - Square, rectangle and parallelogram

A quadrilateral is a plane figure bounded by four sides and four angles. The sum of the four angles in a quadrilateral is (interior angles) equal to  $360^\circ$ . The side joining opposite corners is called diagonal. To construct a quadrilateral out of four sides, four angles and two diagonals a minimum of five dimensions are required of which two must be sides. Quadrilaterals are also referred as Trapezium. (Fig 1)

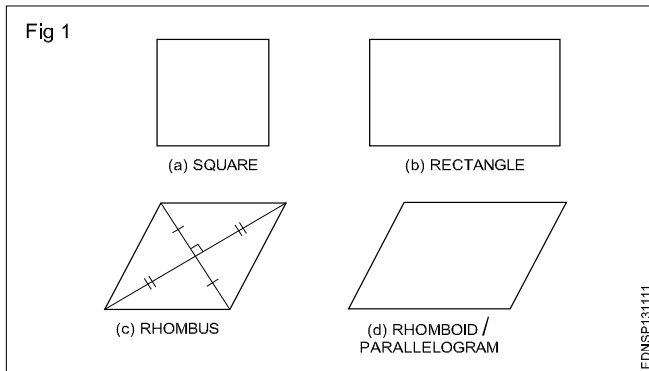


Types of quadrilaterals (Fig 1)

- Square
- Rectangle
- Rhomboid / Parallelogram


**Square:** In a square all the four sides are equal and its four angles are at right angles. The two diagonals are equal and perpendicular to each other.

**Rectangle (Fig 2):** In a rectangle, opposite sides are equal and parallel and all four angles are right angles.

Fig 2 shows a rectangle ABCD, Sides  $AB = DC$  and  $BC = AD$ . Diagonals AC and BD are equal. Diagonals are not bisected at right angles.

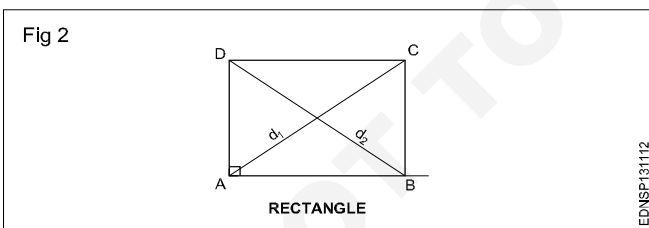

**Rhomboid/Parallelogram (Fig 3):** In a parallelogram, opposite sides are equal and parallel. Opposite angles are also equal. Diagonals are not equal but bisect each other.

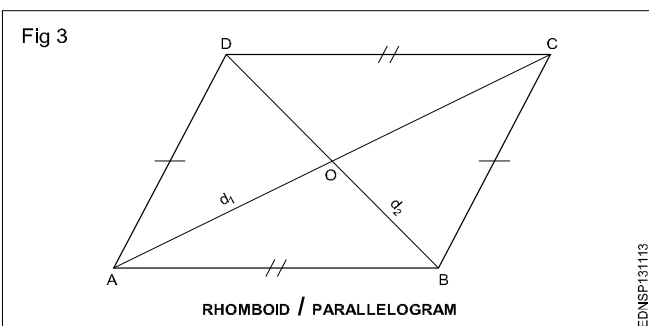


Procedure to draw the square, rectangle and parallelogram


Square

1 **1st method (Fig 1):** A square of side 50 mm by erecting perpendicular using compass and  $45^\circ$  set square.

Draw a line 50mm. 'A' as centre draw an arc of convenient radius. Same arc cut and mark as PQR. Draw a line perpendicular, mark 50mm and make a square as shown in figure.

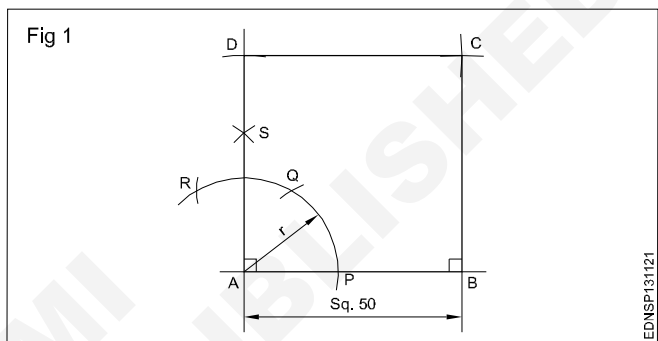


2 **2nd method (Fig 2):** A square of side 60 mm using  $45^\circ$  setsquare and compass.

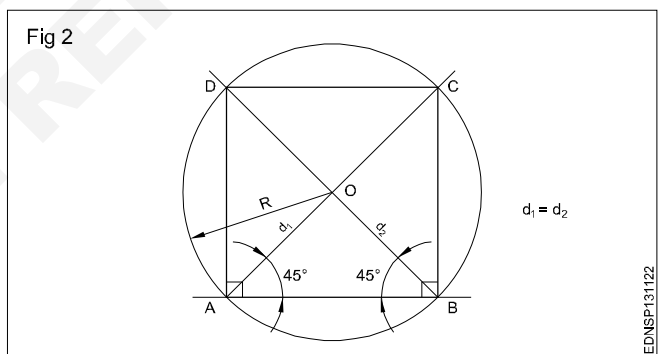


Draw a horizontal line  $AB = 60$  mm. From point 'A' & 'B' using  $45^\circ$  setsquare draw diagonal and circle of radius OA with centre 'O'. Join points AD, DC & CB to complete the required square.

3 **3rd method (Fig 3):** A square of side 60 mm long by erecting perpendicular and also using  $45^\circ$  setsquare. Mark AD, BC and join ABCD to get the required square.

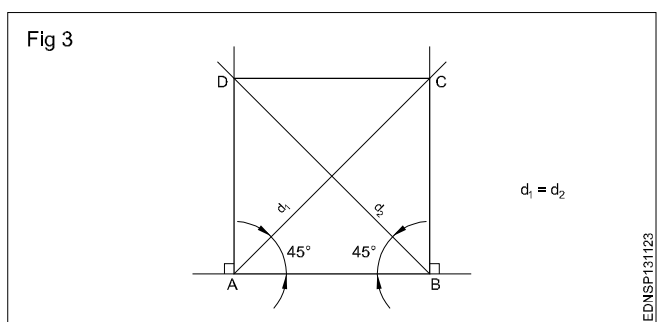


#### 4 Square having diagonal 60 mm (Fig 4)

Draw horizontal and vertical centre lines intersect at 'O' and make a circle. Join all the points ABC&D to get the required square.

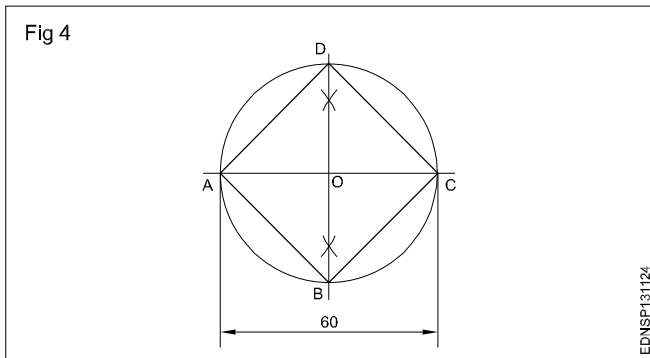

#### 5 Rectangle (Fig 5)


Draw AB = 75 mm and side AD = 45 mm using setsquare and compass. Draw BC = 45 mm using setsquare and compass. Join ABCD to get the required rectangle.

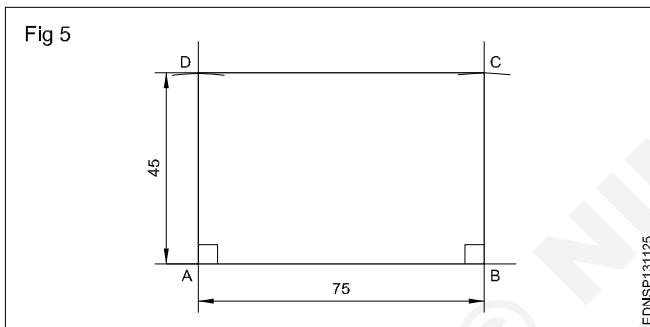

#### 6 Rectangle - Diagonal - 60 mm and one side 20 mm 1st method (Fig 6a)

2nd method (Fig 6b)


ADBC is the required rectangle of side 20 mm and diagonal 60 mm by using setsquare and compass.

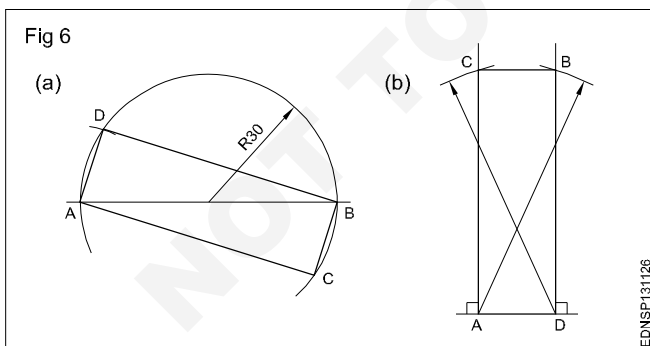

#### 7 Parallelogram (Fig 7)

Sides = 75 mm and 40 mm, angle 50°

- Draw line AD equal to 40 mm and 50° angle to AB.
- 'D' as centre, draw an arc of radius equal to AB.
- 'B' as centre, draw an arc of radius equal to AD, upwards such that they meet at a point 'C'. Join ABCD to get the required parallelogram.

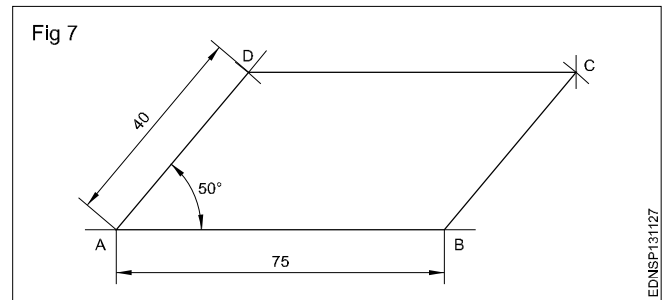


#### 8 Parallelogram (Fig 8)

Parallelogram - Side AB = 60 mm

Diagonal AC = 90 mm  $\angle ABC = 120^\circ$

- Draw a line AB = 60 mm. Draw a line from B to an angle  $120^\circ$  to AB.
- 'A' as centre with radius 90 mm, draw an arc cutting  $120^\circ$  line from 'B' at 'C'.
- 'C' as centre, radius = AB, draw an arc.
- 'A' as centre and BC as radius, draw another arc, both arcs meet at 'D'. Join AD and DC.

ABCD is the required parallelogram.

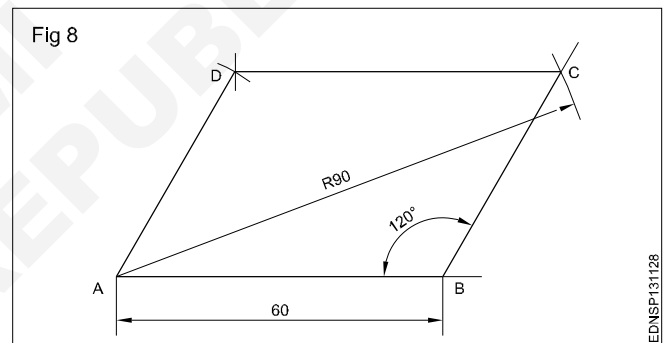


#### 9 Parallelogram (Fig 9)

Sides AB = 55 mm, BC = 40 mm and vertical height = 30 mm.

- Draw the line AB = 55 mm long.
- 'A' and 'B' as centres and radius (R) 30 mm, draw arcs above the line.
- Draw a parallel tangential line to AB touching the arcs.
- 'A' and 'B' as centres, draw an arc of 40 mm radius cutting the line at 'D' and 'C'.

ABCD is the required parallelogram.

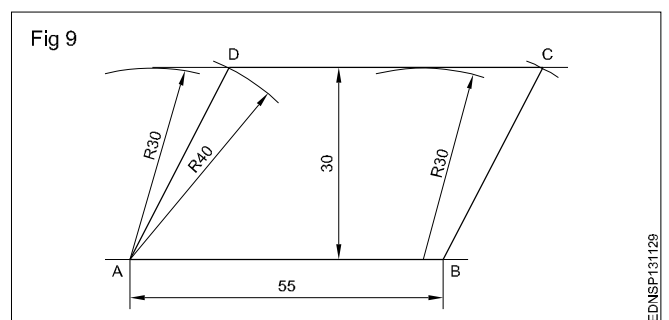

**Lettering and numbering - Single stroke**

**Styles of lettering:** Many styles of lettering are in use today. However, a few styles which are commonly used are shown in Fig 1.

Fig 1

<b>ABCDEFGH</b> <b>abcdefgh</b>	GOTHIC ALL LETTERS HAVING THE ELEMENTARY STROKES OF EVEN WIDTH ARE CLASSIFIED AS GOTHIC
<b>ABCDEFGH</b> <b>abcdefgh</b>	ROMAN ALL LETTERS HAVING THE ELEMENTARY STROKES "ACCENTED" OR CONSISTING OF HEAVY AND LIGHT LINES ARE CLASSIFIED AS ROMAN
<i>ABCDEFGH</i> <i>abcdefgh</i>	ITALIC ALL SLANTING LETTERS ARE CLASSIFIED AS ITALIC. THESE MAY BE FURTHER DESIGNATED AS ROMAN-ITALICS, GOTHIC-ITALICS, TEXT-ITALICS
<b>A B C D E F G H</b> <b>a b c d e f g h</b>	TEXT THIS TERM INCLUDES ALL STYLES OF OLD ENGLISH, GERMAN TEXT. BRADELY TEXT OF OTHERS OF VARIOUS TRADE NAMES. TEXT STYLES ARE TOO ILLEGIBLE FOR COMMERCIAL PURPOSES

EDNSP1312/11

**Standard heights/Width:** The standard heights recommended by BIS SP: 46-2003 are in the progressive ratio of "square root 2". They are namely 2.5 - 3.5 - 5 - 7 - 10 - 14 and 20 mm. The height of lower case letter (without tail or stem) are 2.5, 3.5, 5, 7, 10 and 14 mm.

There are two standard ratios for the line thickness "d". They are A & B. In A = line thickness (d) is h/14 and in B=line thickness (d) is h/10.

**Lowercase** means small letters, as opposed to capital letters. The word yes, is for example, is in **lowercase**, while the word YES is in **upper case**. For many programmes, this distinction is very important. Programmes that distinguish between **uppercase** and **lowercase** are said to be case sensitive

The width of different letters in terms of "d" is as follows:

**Lettering A**

Width (W)	Capital letters	Width
1	I	1d
5	J,L	5d
6	C,E,F	6d
7	B,D,G,H,K,N,O,P,R,S,T,U & Z	7d
8	A,Q,V,X,Y	8d
9	M	9d
12	W	12d

**Lower case letters and numerals**

Width (W)	Letters/Numerals	Width
1	i	1d
3	j,l	3d
4	f,t,l	4d
5	c,r	5d
6	a,b,d,e,g,h,k,n,o,p,q,s,u,v;3;5	6d
7	a,0 (zero), 2,4,6,7,0,8,9	7d
9	m	9d
10	w	10d

The width of different letters in terms of stroke (line) is as follows:


**Uppercase Lettering BIS SP: 46-2003**

Width (W)	Capital letters
1	I
4	J
5	C,E,F,L
6	B,D,G,H,K,N,O,P,R,S,T,U & Z
7	A,M,Q,V,X,Y
9	W

**Lower case letters and numerals**

Width (W)	Letters/Numerals
1	i
2	l
3	j,l
4	c,f,r,t
5	a,b,d,e,g,h,k,n,o,,q,s,u,v,x,y,x 0,2,3,5 to 9
6	0,2,3,5 to 9 a,4


**Spacing of letters:** Recommended spacing between characters, a minimum spacing of baselines and minimum spacing between words as per BIS SP: 46-2003 are given below in Fig 2.

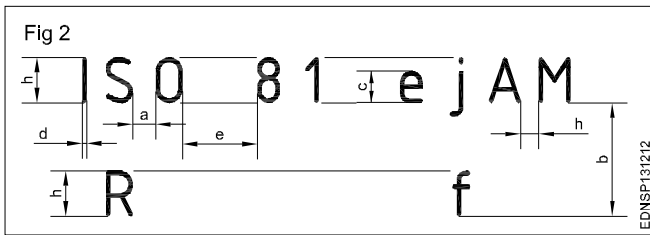

**Lettering**

**Procedure**

- 1 Print 10 mm single stroke capital letters and numerals in vertical style using either scale or set-square and by freehand. (Fig 1)

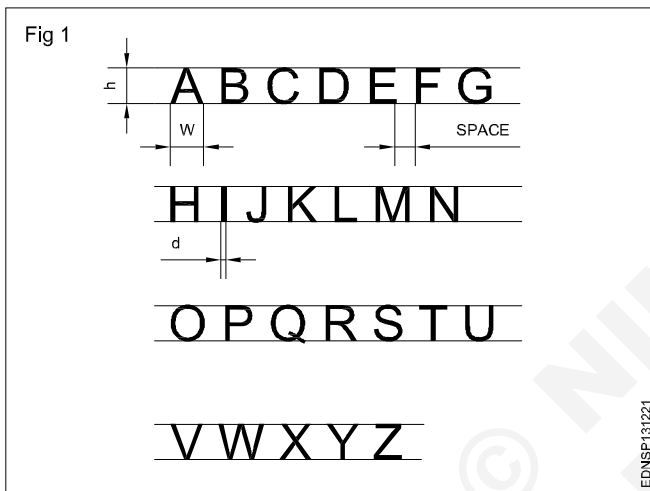

- Draw horizontal parallel lines (thin lines) of 10 mm distance.

**10 mm distances denote the height of the letter.**


- Mark the width of the letters recommended by BIS (IS:9609-1983)

**The width of different letters in terms of 'd' is as follows: 'd' indicates stroke thickness i.e d: h/ 10.**


Width (W)	Capital letters
1	I
4	J
5	C, E, F, L
6	B, D, G, H, K, N, O, P, R, S, T, U & Z
7	A, M, Q, V, X, Y
9	W

**For curved letters use a smooth freehand curve.**  
**Print straight line letters using either scale or set-squares.**  
**To maintain the uniform thickness of the line, use a conical point soft grade pencil and avoid too much sharpness.**  
**Guidelines of both top and bottom should always be drawn with a sharp pencil.**

Numerals 2.1 (Fig 2)

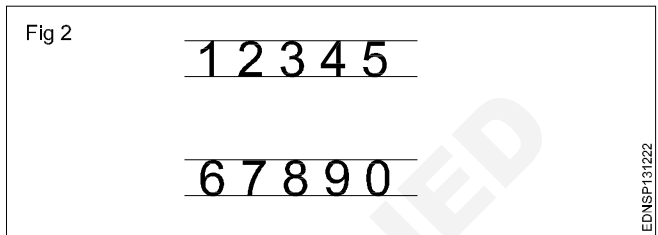

- Follow the same procedure of letters.
- 'h' is height of numerals and 'd' is the stroke thickness.
- Width of numerals in terms of 'd' is as follows shown in square grid (Fig 3).

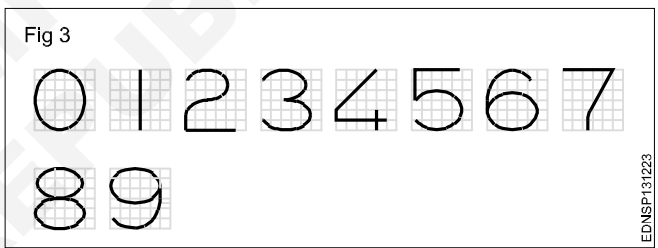

- 2 Print 10 mm single stroke capital letters and numerals in inclined style (Fig 4).



Practice the following lettering exercises in A3/A4 paper as per the given ratio

1 Single stroke inclined letters of ratio 7:6, 7:5, 7:4, 7:3, 7:1 (Fig 5)

Fig 5




SINGLE STROKE INCLINED LETTERS

EDNSP131225

2 Single stroke vertical letters of ratio 7:6, 7:5, 7.4, 7:3, 7:1 (Fig 6)

Fig 6

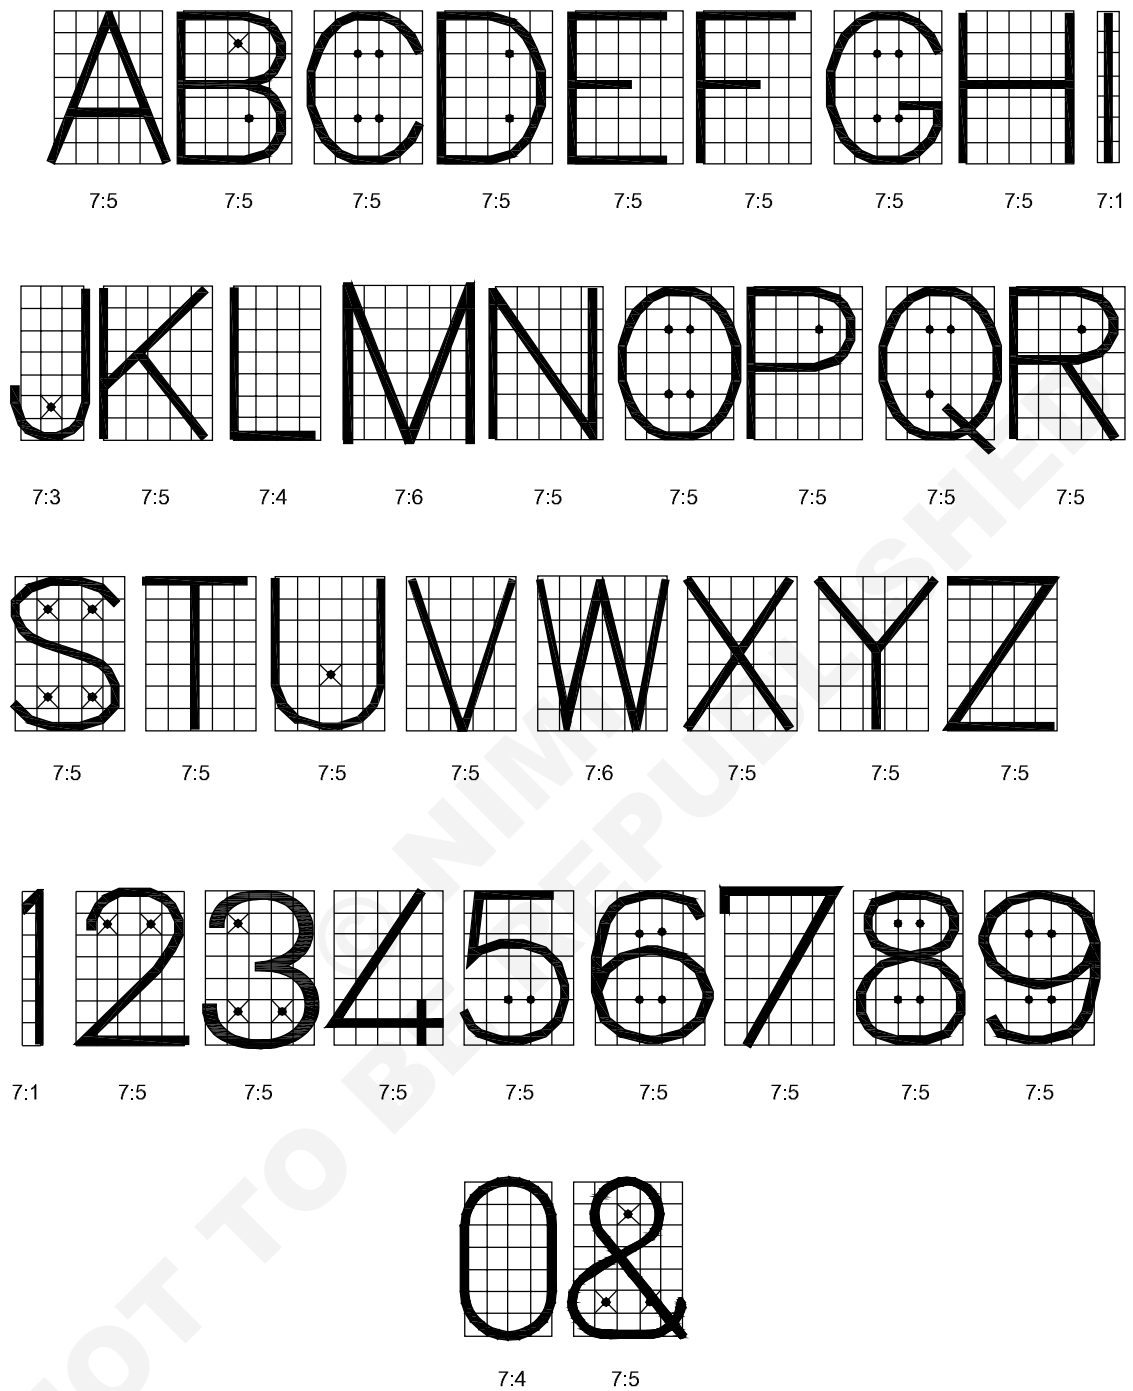


SINGLE STROKE VERTICAL LETTERS

EDNSP131226


Dimensioning - Types of arrow heads

**Dimension line:** These are thin continuous lines, terminated at ends by arrowheads, dots or oblique lines touching the extension line. (Fig 1)

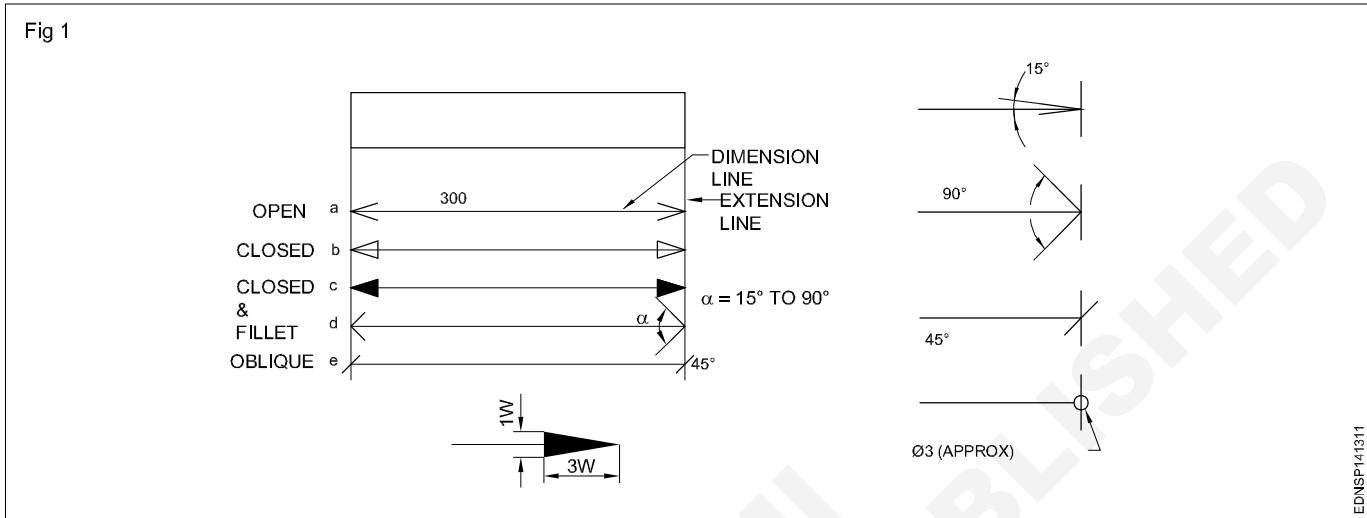

A dimension line may cut or cross another dimension line where there is no other way.

Dimension to the hidden lines be avoided. (Fig 2)

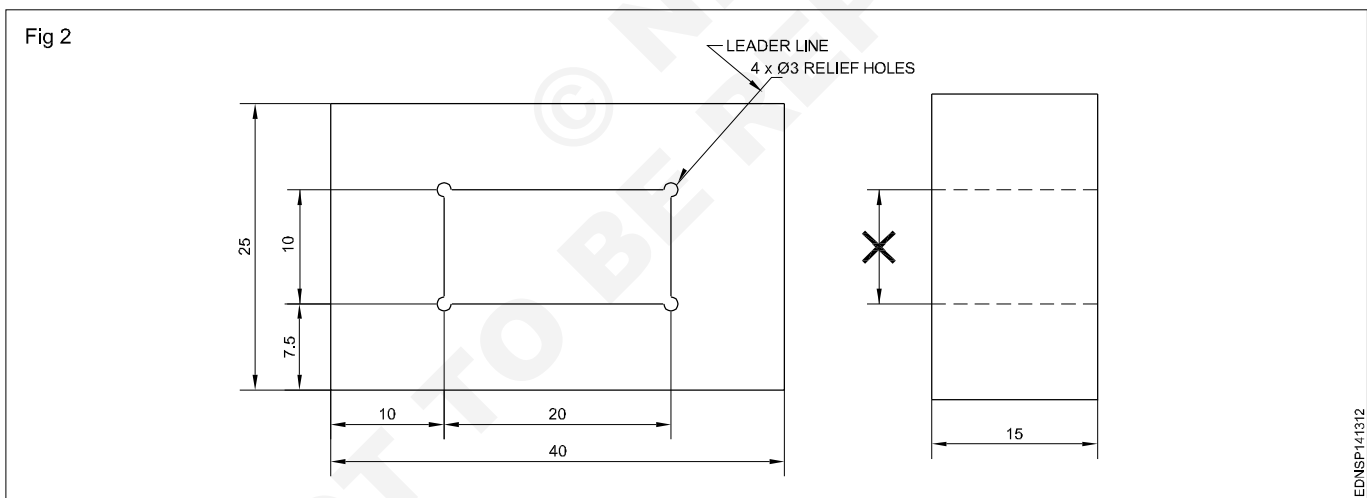

Arrowheads may be placed outside where space is insufficient.

**Leader line:** It is a thin continuous line. It connects a note or dimension with the features to which it applies. (Fig 2)

**Termination and Origin indication:** The size of the terminations (arrowheads/oblique strokes) shall be proportional to the size of the drawing. Only one style of arrowhead shall be used on a single drawing. However, where the space is too small for the arrowheads, it may be substituted by a dot or by an oblique line. Arrowheads are drawn as short lines forming barbs at any convenient




















included angle between 15° and 90°. They may be open, closed or closed and filled in. Oblique strokes are drawn as short lines inclined at 45°. (Fig 1)


















**Indicating dimensional values on drawings:** All dimensional values shall be shown on drawings in characters of sufficient size to ensure complete legibility on the original drawings as well as on reproductions made from micro-filming.

They shall be placed in such a way that they are not crossed or separated by any other line on the drawing.













**Symbolic representation – Different symbols used in the Spinning / Textile wet processing /weaving Technician trades**












Sl.No.	Description	Symbol
1	Machine wash	
2	Do not wash	
3	Hand wash	
4	Wash at 30°C of below	
5	Wash at 40°C of below	
6	Wash at 50°C of below	
7	Wash at 60°C of below	
8	Wash at 70°C of below	
9	Wash at 95°C of below	
10	Permanent press cycle	
11	Gentle cycle or delicates	
12	Wash at 30°C of below	
13	Wash at 40°C of below	
14	Wash at 50°C of below	
15	Wash at 60°C of below	
16	Wash at 70°C of below	
17	Wash at 80°C of below	
18	Bleach is allowed	
19	Ironing is allowed	

Sl.No.	Description	Symbol
20	Iron at 110°C	
21	Iron at 150°C	
22	Iron at 200°C	
23	Do not iron	
24	Do not steam	
25	Wiring is allowed	
26	Do not wiring	
27	Do not bleach	
28	Drying symbol	
29	Hand dry	
30	Dry flat	
31	Drip dry	
32	Dry in shade	
33	Hand dry in shade	
34	Dry flat in shade	
35	Drip dry in shade	
36	Do not bleach	















SI.No.	Description	Symbol
37	Tumble dry is allowed	
38	Do not tumble dry	
39	No heat dry	
40	Low heat dry	
41	Medium heat dry	
42	High heat dry	
43	Permanent press dry	
44	Gentle or delicates dry	
45	Non-chlorine bleach	
46	Dry clean	
47	Do not dry clean	
48	Dry clean petroleum solvents only	
49	Gentle dry clean petroleum solvents only	
50	Very gentle dry clean petroleum solvents only	
51	Dry clean PCE	
52	Gentle dry clean PCE	
53	Very gentle dry clean PCE	

SI.No.	Description	Symbol
54	Chlorine bleach	
55	Dry clean any solvent	
56	Professional wet cleaning	
57	Gentle wet cleaning	
58	Very gentle wet cleaning	
59	Do not wet clean	
60	Short cycle	
61	Reduced moisture	
62	Low heat	
63	No steam finishing	
64	Membrane fabric	
65	Water proof	
66	Feather filler	
67	Synthetic fabric	
68	Insulated fabric	

SI.No.	Description	Symbol
69	Cotton	
70	Breathable material	
71	Textile	
72	Leather	
73	Windproof	
74	Bamboo fabric	
75	Acrylic	
76	UV protection	
77	Wool	
78	Eco-friendly material	

SI.No.	Description	Symbol
79	Decorative textiles	
80	Colored cloth	
81	Reflective details	
82	Color palette	
83	Silk light fabric	
84	Cotton	
85	Polyester	
86	Elastance	
87	Leather	
88	Wool	
89	Linen	


**Table 1**  
**Geometric Characteristic Symbols**

Category	Characteristic	Symbol	Uses a datum reference
Form	Straightness		Never
	Flatness		
	Circularity (Roundness)		
	Cylindricity		
Profile	Profile of a line		Sometimes
	Profile of a surface		
Orientation	Angularity		
	Perpendicularity		
	Parallelism		
Location	Position		Always
	Concentricity		
	Symmetry		
Runout	Circular runout		
	Total runout		



## Sewing Section (Fig 2)


### Safety layout plan for a sewing section of a garment factory

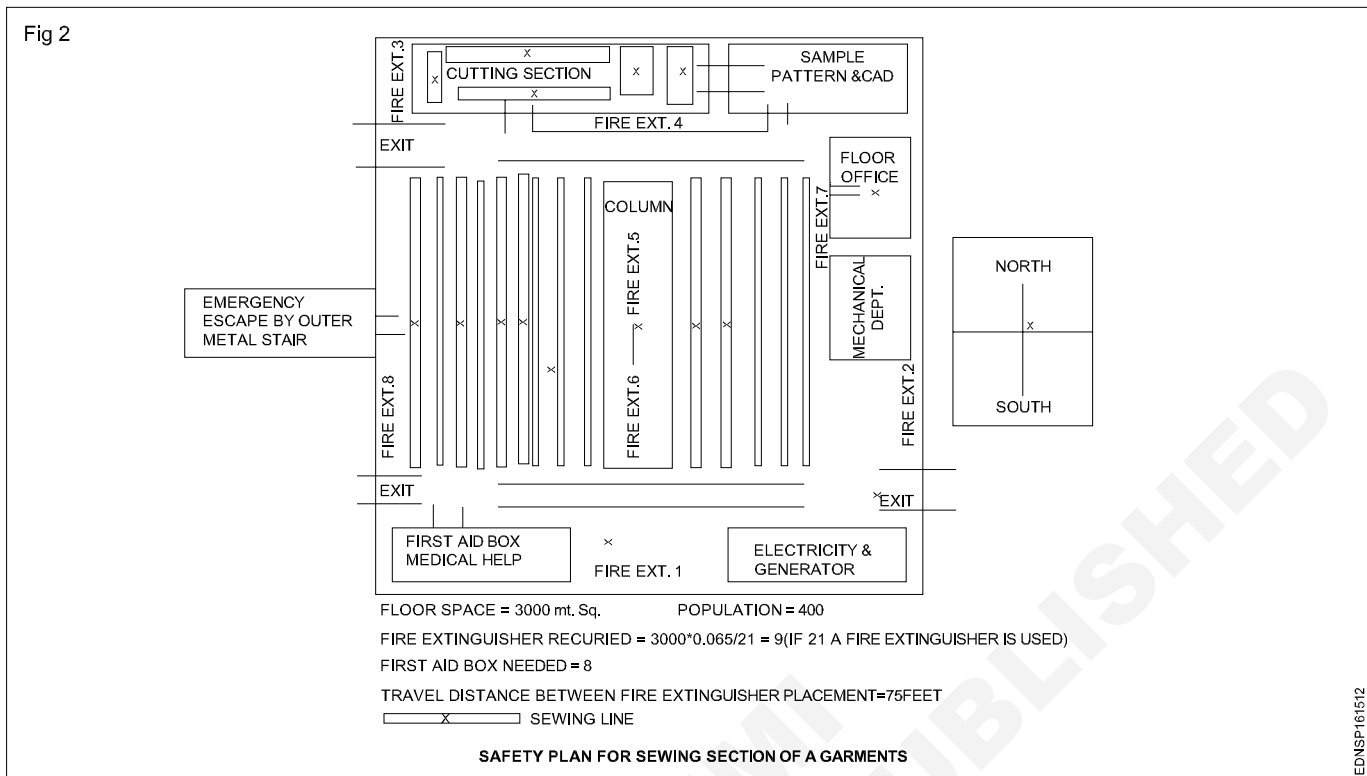

#### Precautionary Measures to be Adopted (not exhaustive)

- Building should be constructed with fire resisting materials
- Adequate exits and proper escape routes should be designed
- Protection against fire and smoke should be ensured
- Electrical wiring must be properly designed, installed and maintained
- Escape routes should be lighted at all times, kept clear, be indicated by signs
- Regular fire drills should be held
- Doors should be protected and should open along the direction of escape
- Doors should not open on the steps and sufficient space in the landing should be provided.
- Smoke/Fire alarm systems must be installed
- Adequate number of extinguishers should be provided
- Prior relationship with local Fire services should be established

## ETP Plants – Characteristics of Textile Sludge and Its Treatment (Fig 3)

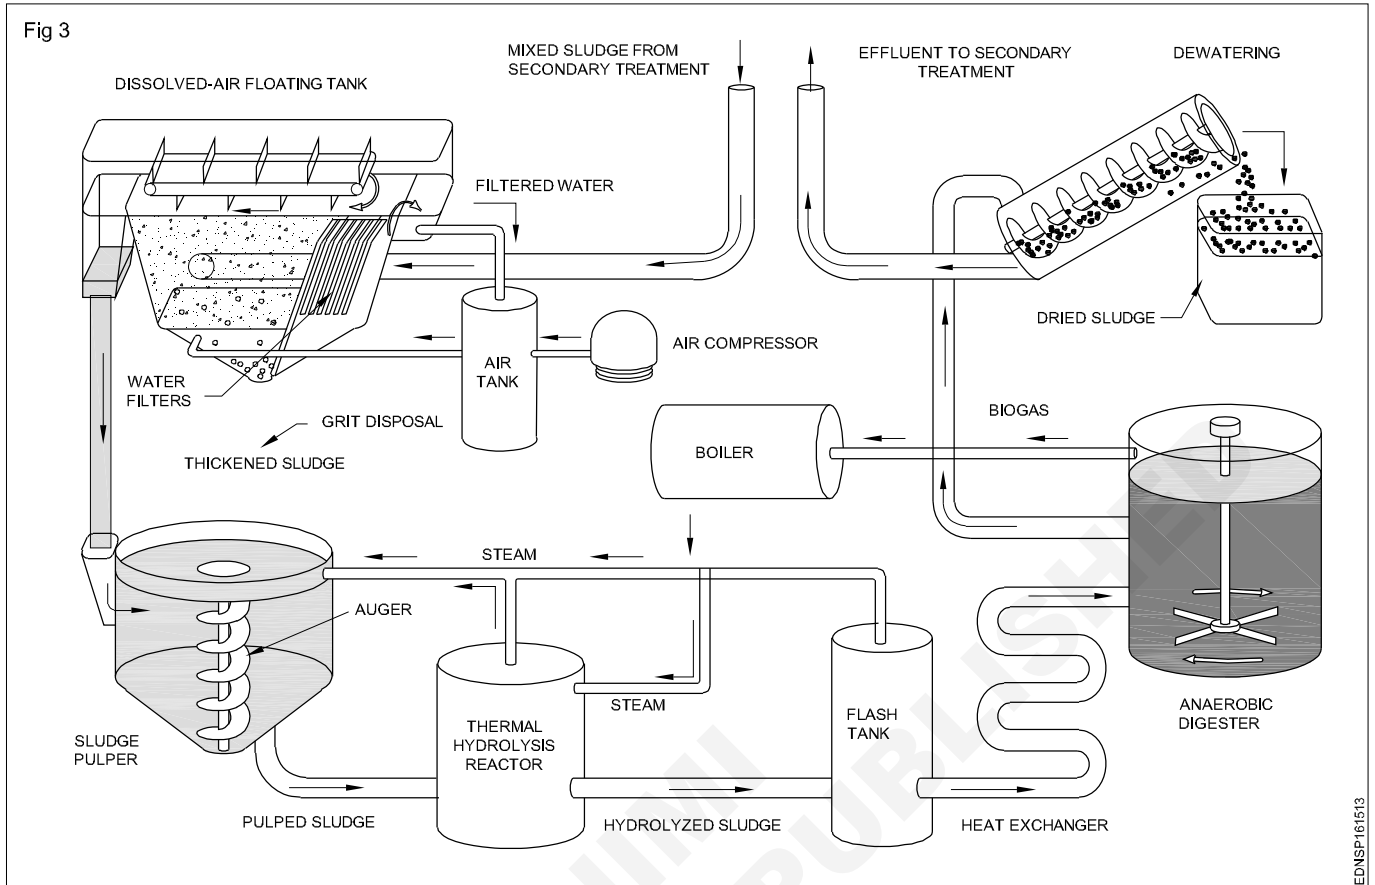

Textile industries are regarded as large industrial consumers of water in addition to the major producers of wastewaters. Although the main purpose of tightening environmental standards is to treat wastewater before discharging it safely.

A semi-solid part obtained after the treatment of effluent in the effluent treatment plant (ETP) is known as sludge. It is

an inevitable by-product of textile WTP. Sludge from Effluent Recycling Systems usually constitutes clusters of inorganic and organic complexes with high concentrations of chemicals, heavy metals obtained from dyestuff, bleaching, and other process residues.

## Types of Spinning method

### Melt Spinning, Dry spinning and Wet Spinning Method

Man-made fibers are manufactured by spinning the polymer. There are three major types of spinning process. They are-

1 Melt Spinning (It is used for polymers that can be melted easily.)


2 Dry Spinning (It involves dissolving the polymer into a solution that can be evaporated.)

3 Wet Spinning (It is used when the solvent can't be evaporated and must be removed by chemical means.)

### Wet spinning (Fig 4)


#### Basic of textiles, textile articles

The first monetarily effective strategy for the production of synthetic fiber was the wet turning of the cellulosic fiber, rayon.

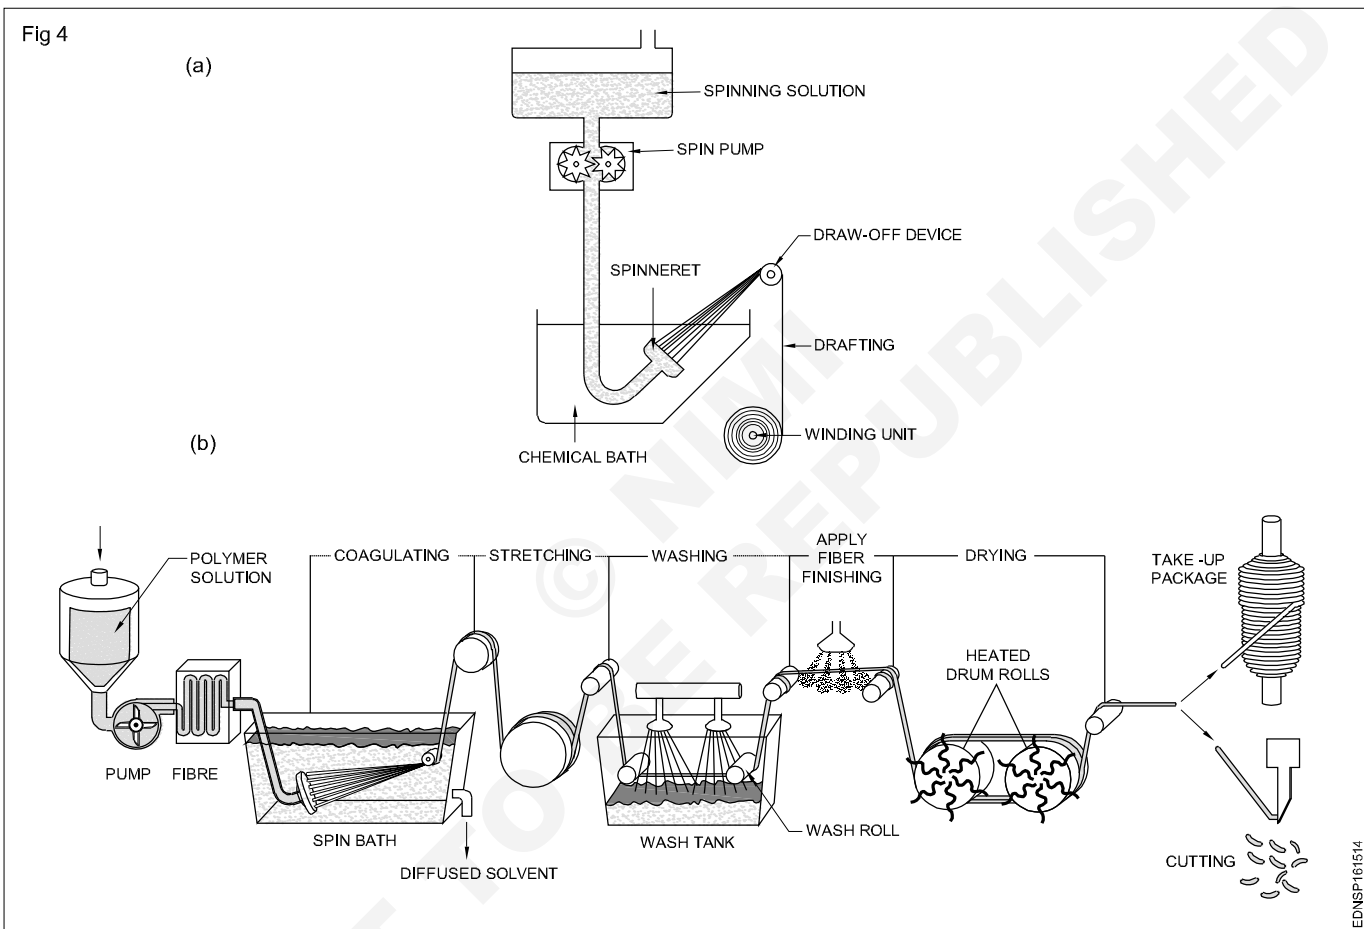





**Melt spinning process (Fig 5)**

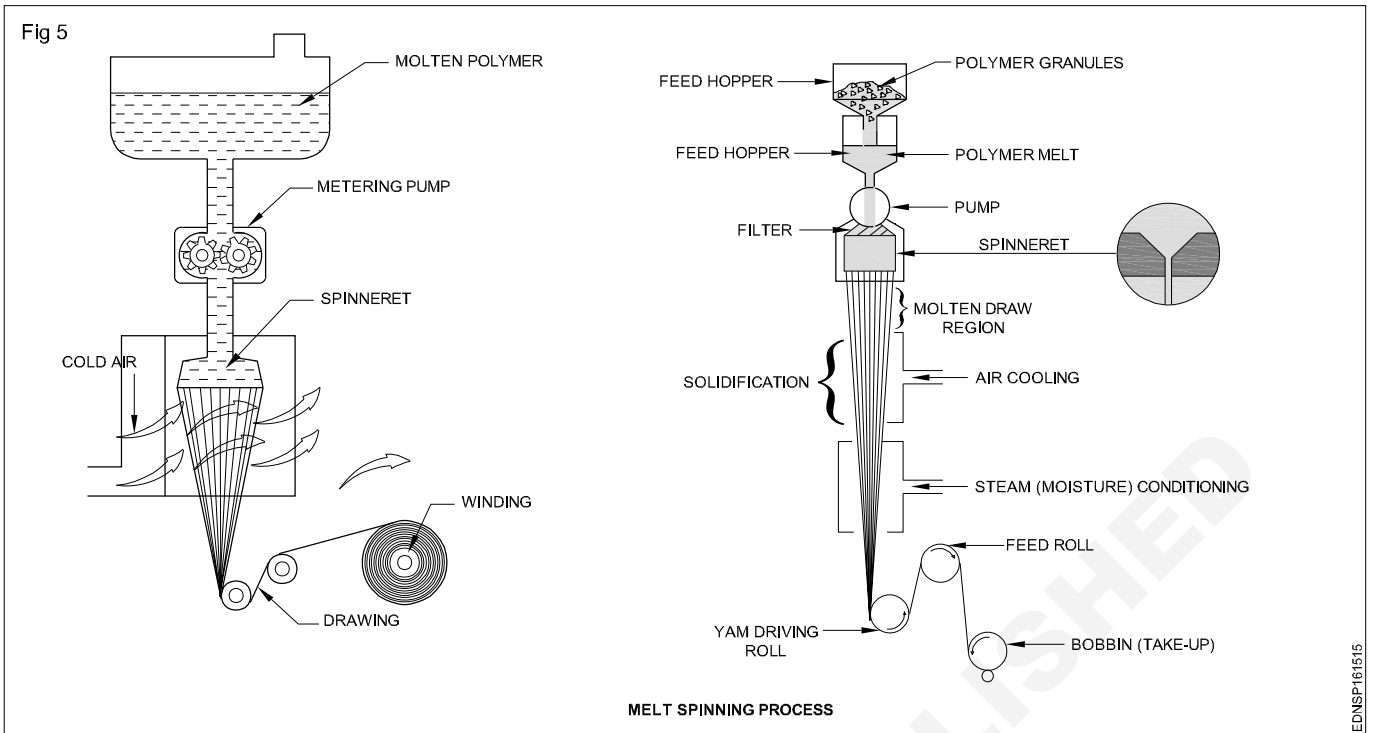

**Dry spinning process (Fig 6)**

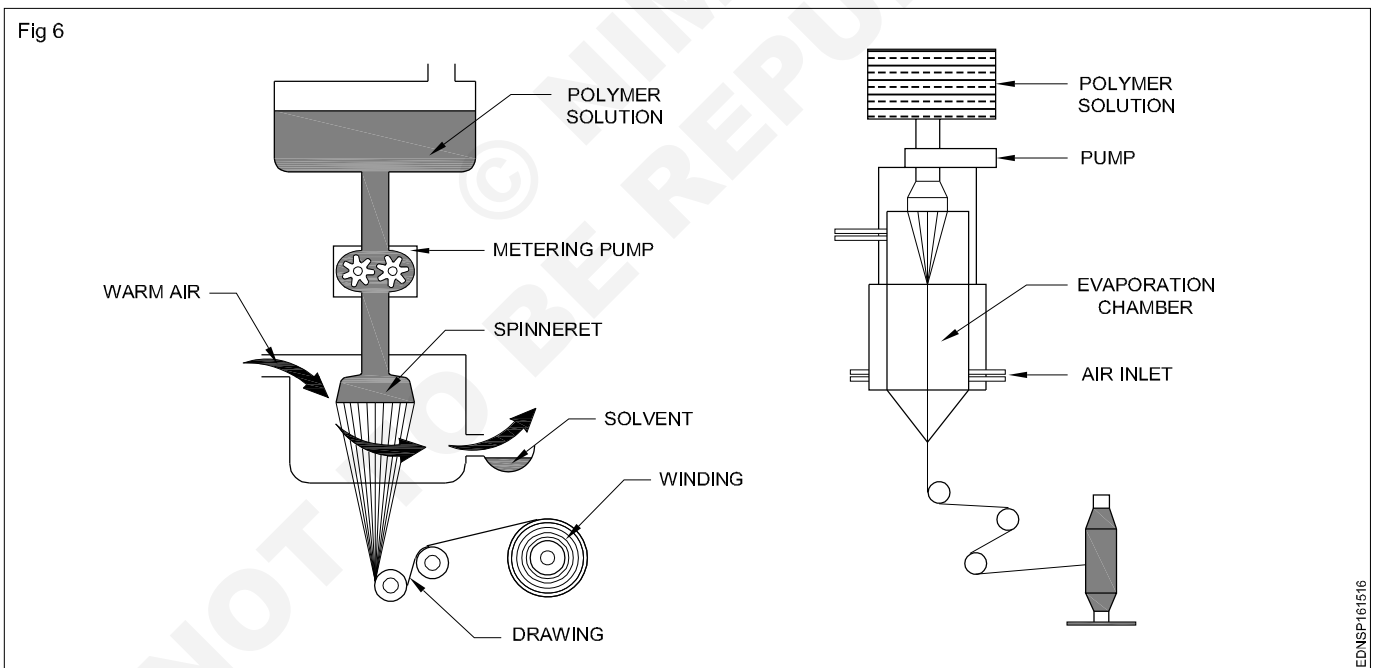


General process diagram of melt, dry and wet spinning process (Fig 7)

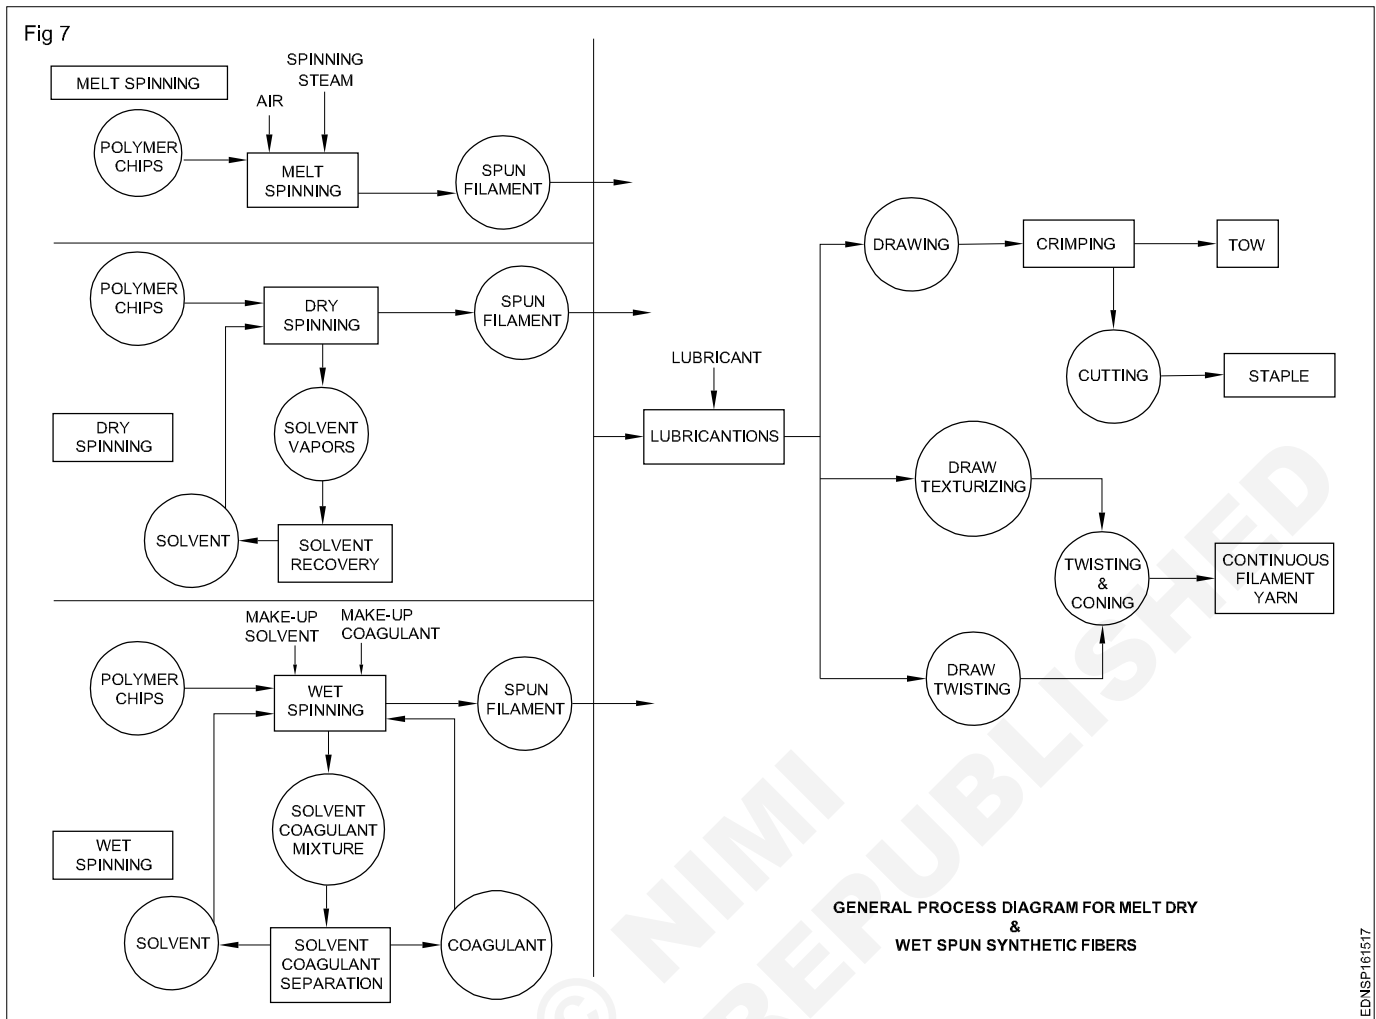


Flexible Multi-Chip Modules (Fig 8)

Schematic diagram of the “flexible” multi-chip module

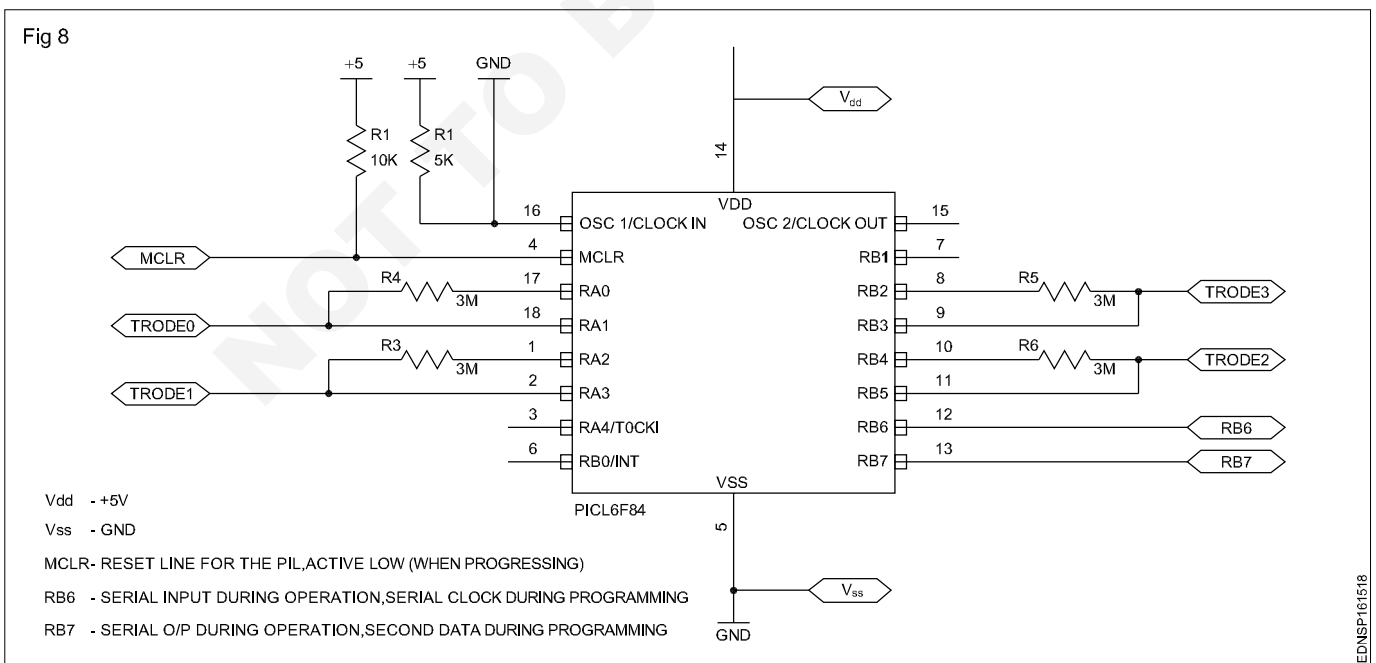


### Impurity levels of PTA and MTA (Fig 9)

The tensile stress on the melt stream must never exceed the tensile strength of the filament. So take up velocity should not exceed the spinning speed. The molecular weight is generally relatively low (16,000-19000 g/mol) in the case of polymer to be used as a fiber.

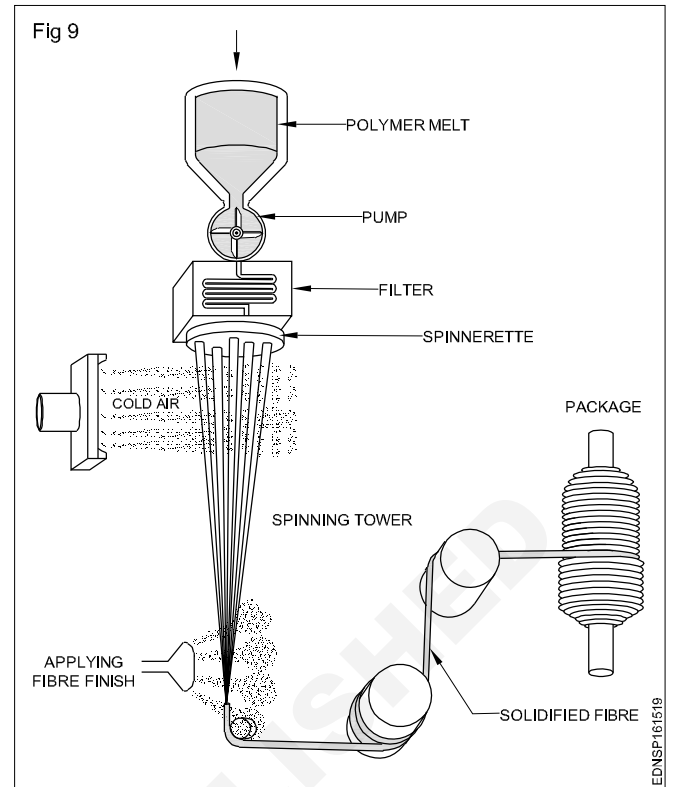


Reading of Chemical plant Layout drawing

Layout of Textile mill (Fig 1)

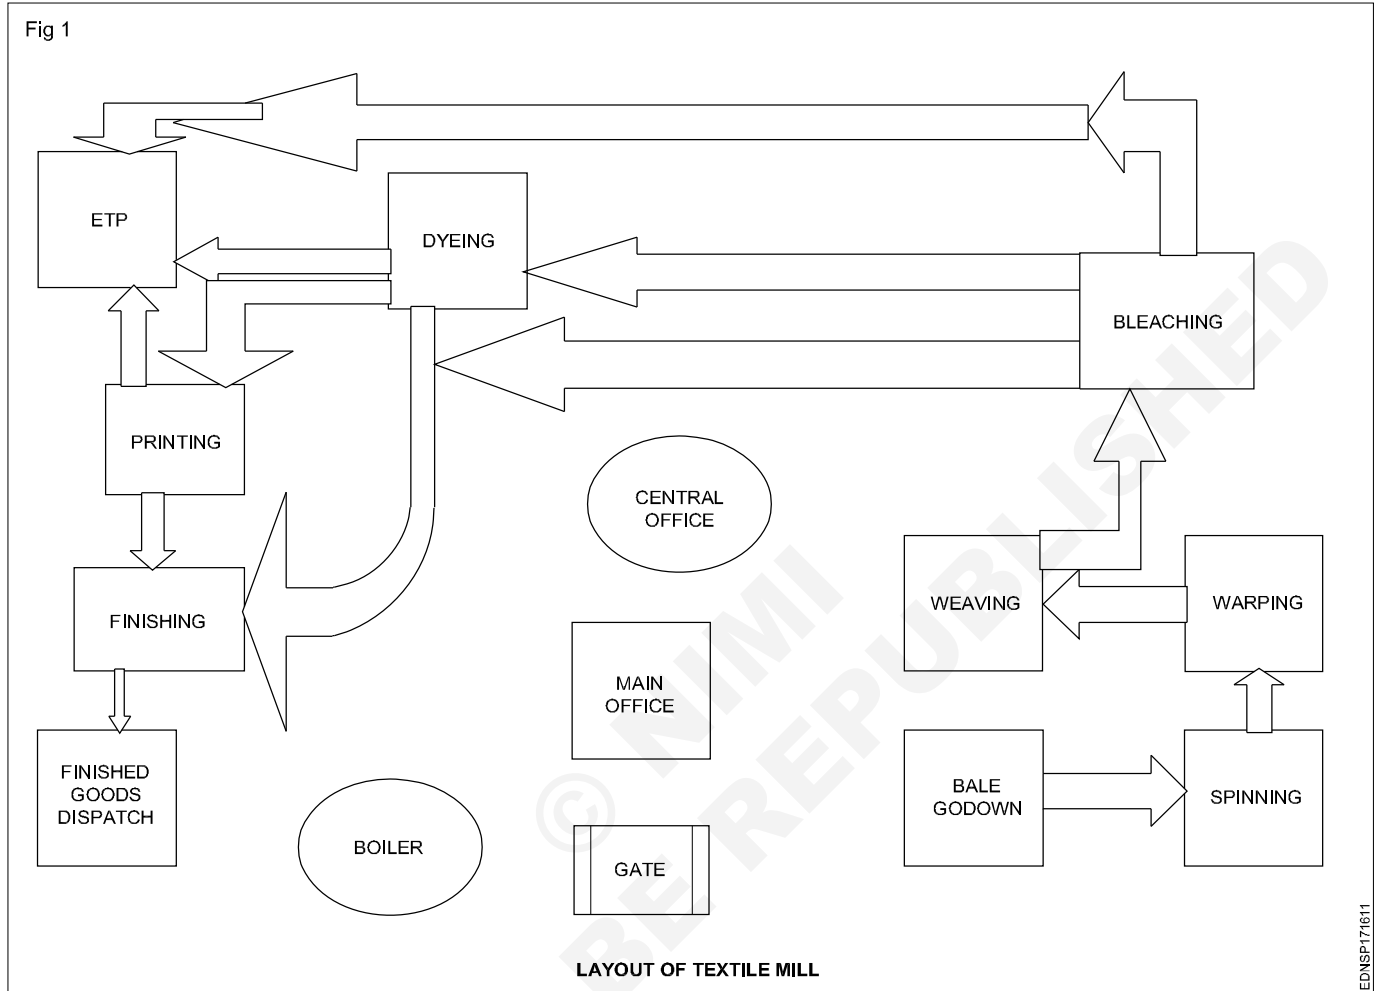

**Lauout of Bleaching department (Fig 2)**

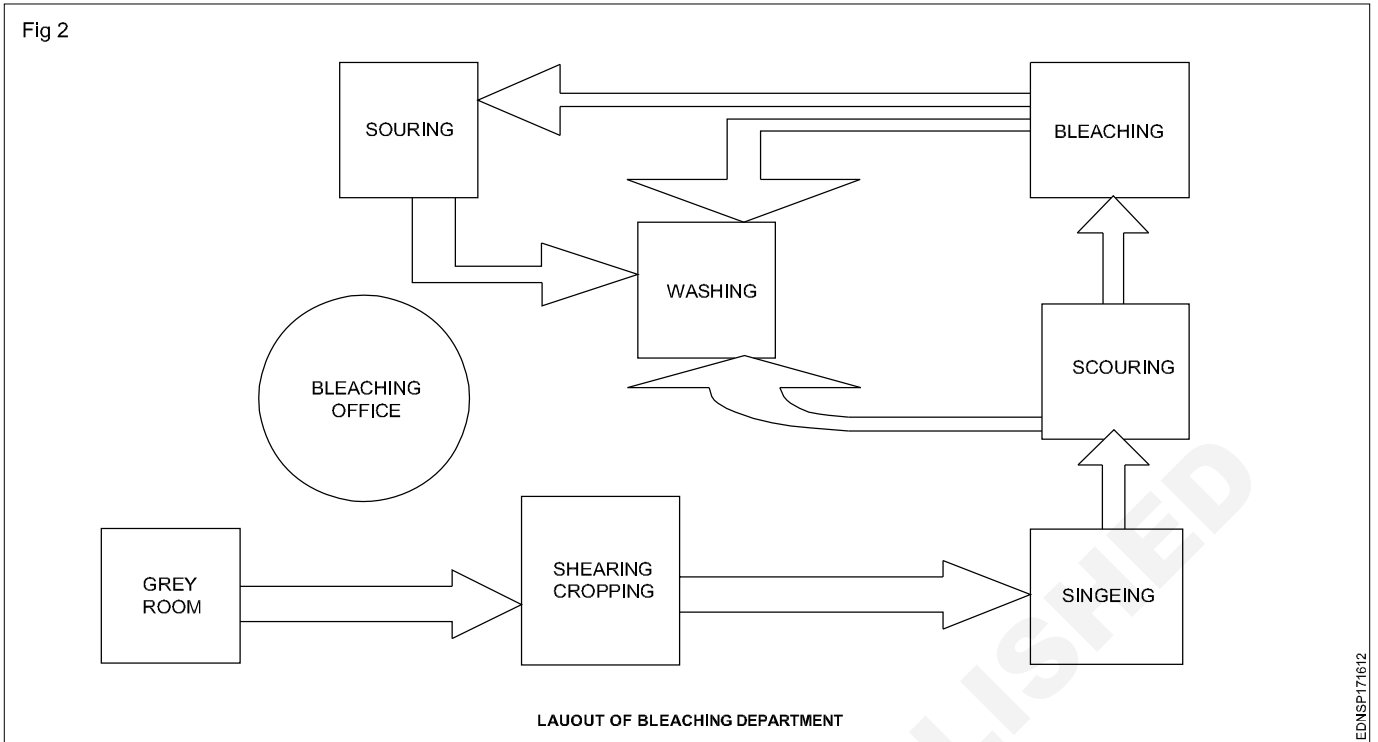

**Layout of Dyeing department (Fig 3)**

